



MMBD4448HCQW /AQW /ADW/ CDW /SDW /TW


SURFACE MOUNT FAST SWITCHING DIODE ARRAY

Features


- Fast Switching Speed
- Ultra-Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance

Mechanical Data


- Case: SOT-353 and SOT-363, Molded Plastic
- Case Material - UL Flammability Rating Classification 94V-0
- Terminals: Solderable per MIL-STD-202, Method 208
- Orientation: See Diagram
- Marking: See Diagram
- Weight: 0.006 grams (approx.)

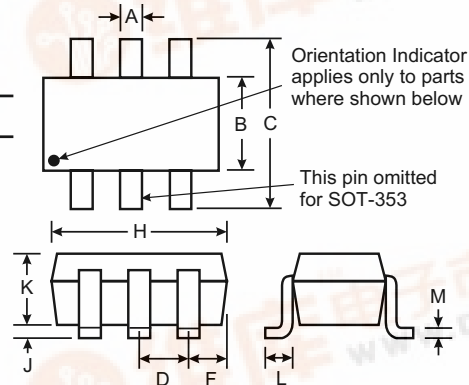


SOT-363/SOT-353		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
All Dimensions in mm		




Marking: KA4
MMBD4448HCQW




Marking: KA5
MMBD4448HAQW




Marking: KA6
MMBD4448HADW



Marking: KA7
MMBD4448HCDW



Marking: KAB
MMBD4448HSDW



Marking: KAA
MMBD4448HTW

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	80	V
RMS Reverse Voltage	V _{R(RMS)}	57	V
Forward Continuous Current	I _{FM}	500	mA
Average Rectified Output Current	I _O	250	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0s	I _{FSM}	4.0 2.0	A
Power Dissipation (Note 1)	P _d	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	625	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150	°C

Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	$V_{BR(R)}$	80	—	V	$I_R = 100\mu\text{A}$
Maximum Forward Voltage (Note 2)	V_{FM}	0.62 — — —	0.72 0.855 1.0 1.25	V	$I_F = 5.0\text{mA}$ $I_F = 10\text{mA}$ $I_F = 100\text{mA}$ $I_F = 150\text{mA}$
Maximum Peak Reverse Current (Note 2)	I_{RM}	—	100 50 30 25	nA μA μA nA	$V_R = 70\text{V}$ $V_R = 75\text{V}, T_j = 150^\circ\text{C}$ $V_R = 25\text{V}, T_j = 150^\circ\text{C}$ $V_R = 20\text{V}$
Junction Capacitance	C_j	—	3.5	pF	$V_R = 6, f = 1.0\text{MHz}$
Reverse Recovery Time	t_{rr}	—	4.0	ns	$V_R = 6\text{V}, I_F = 5\text{mA}$

Notes: 2. Short duration pulse test used to minimize self-heating effect.

Ordering Information (Note 3)


Device	Packaging	Shipping
MMBD4448HADW-7 MMBD4448HAQW-7 MMBD4448HCDW-7 MMBD4448HCQW-7 MMBD4448HSDW-7 MMBD4448HTW-7	SOT-363 SOT-363 SOT-363 SOT-353 SOT-363 SOT-363	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

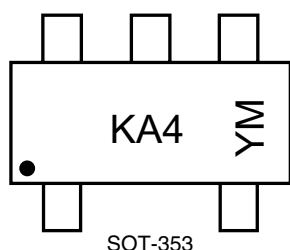Marking Information


SOT-353

KA4 = Product Type Marking Code, KA4 = MMBD4448HCQW
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

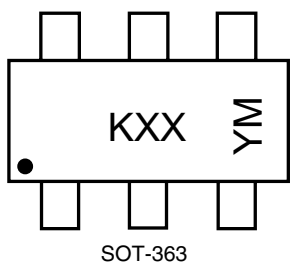

SOT-363

KXX = Product Type Marking Code, ex. KA5 = MMBD4448HAQW
KAA = MMBD4448HTW
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

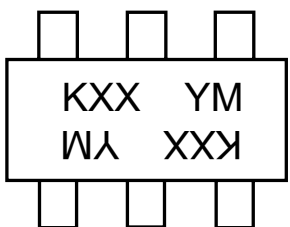

SOT-363

KXX = Product Type Marking Code, ex. KA6 = MMBD4448HADW
KA7 = MMBD4448CDW
KA8 = MMBD4448HSDW

YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004
Code	J	K	L	M	N	O	P

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

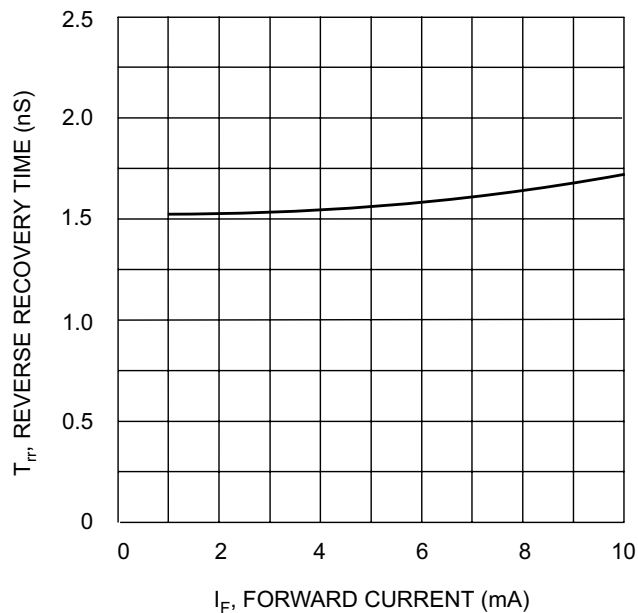


Fig. 1. Reverse Recovery Time vs. Forward Current

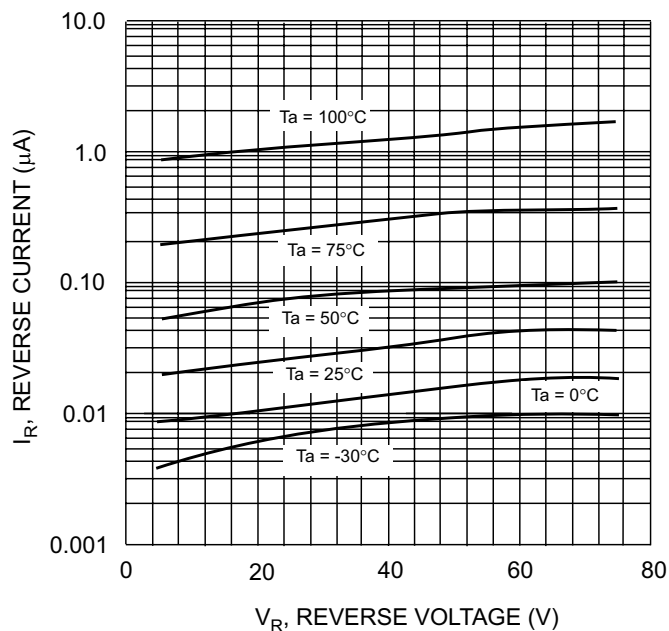


Fig. 2 Reverse Current vs Reverse Voltage

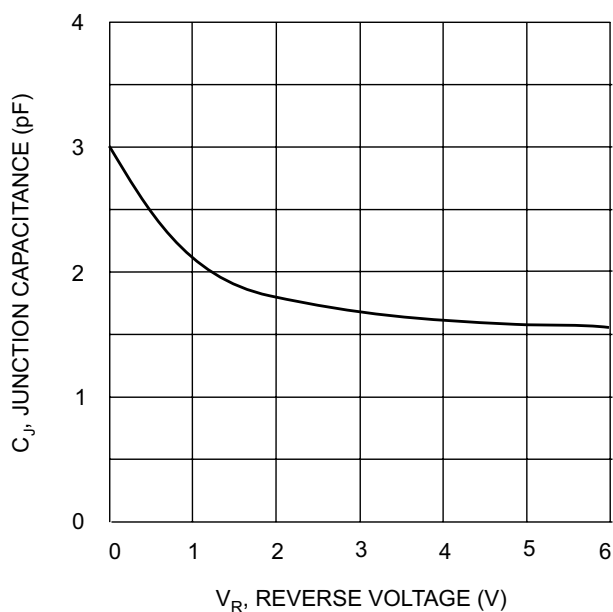


Fig. 3. Typical Junction Capacitance vs. Reverse Voltage

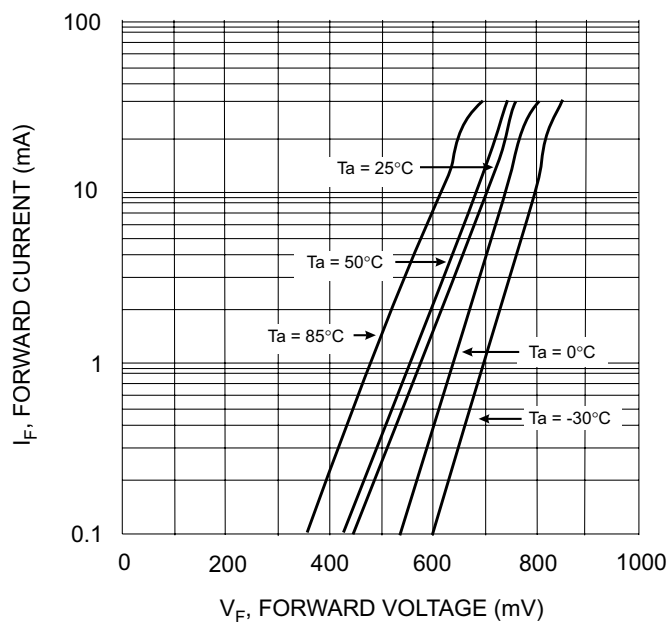


Fig. 4 Forward Current vs. Forward Voltage