

3V electronic governor

BA6235F

The BA6235F is an IC for controlling the speed of low voltage DC motors. It consists of a reference voltage generator, current multiplier, and DC amplifier. The speed of DC motor is controlled by detecting the counter-electromotive force generated by the motor. Various DC motors can be driven by changing the external CR time constants.

●Applications

3V radio cassette tape recorders

Micro-cassette tape recorders

●Features

- 1) Wide range of operating voltage. (1.8 ~ 5V)
- 2) Low current consumption. ($I_o = 2.0\text{mA}$)

- 3) Various DC motors can be driven by changing the external CR time constants.

●Absolute maximum ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	8.0	V
Power dissipation	BA6235F P_d	350*	mW
Operating temperature	T_{opr}	$-20 \sim +75$	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +125$	$^\circ\text{C}$

* Reduced by 3.5 mW for each increase in T_a of 1°C over 25°C .

●Recommended operating conditions ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V_{CC}	1.8	3.0	5.0	V
Maximum motor current	I_M	—	—	800	mA


●Block diagram

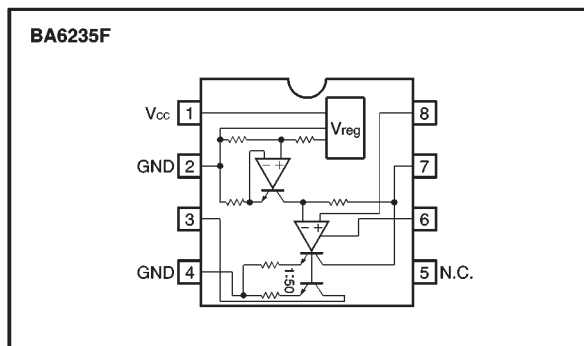

●Electrical characteristics (unless otherwise noted, $T_a = 25^{\circ}\text{C}$ and $V_{CC} = 3.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Supply current	I_O	—	2.0	5.5	mA	$I_M=0$ mA
Output saturation voltage	$V_{O\ sat}$	—	0.1	0.3	V	$I_M=120$ mA
Reference voltage	V_{ref}	165	190	215	mV	$I_M=120$ mA
Current ratio	K	45	50	55	—	$I_M=50\sim150$ mA
Reference voltage vs. voltage	$\frac{\Delta V_{ref}}{V_{ref}}/\Delta V_{CC}$	—	0.1	—	% / V	$I_M=120$ mA, $V_{CC}=1.8\sim3.5$ V
Current ratio vs. voltage	$\frac{\Delta K}{K}/\Delta V_{CC}$	—	0.1	—	% / V	$I_M=50\sim150$ mA, $V_{CC}=1.8\sim3.5$ V
Reference voltage vs. current	$\frac{\Delta V_{ref}}{V_{ref}}/\Delta I_M$	—	0.002	—	% / mA	$I_M=20\sim200$ mA
Current ratio vs. current	$\frac{\Delta K}{K}/\Delta I_M$	—	0.05	—	% / mA	$I_M=20\sim200$ mA
Reference voltage vs. temperature	$\frac{\Delta V_{ref}}{V_{ref}}/\Delta T_a$	—	0.02	—	% / °C	$I_M=120$ mA, $T_a=-20\sim+75$ °C
Current ratio vs. temperature	$\frac{\Delta K}{K}/\Delta T_a$	—	0.02	—	% / °C	$I_M=50\sim150$ mA, $T_a=-20\sim+75$ °C

●Application example

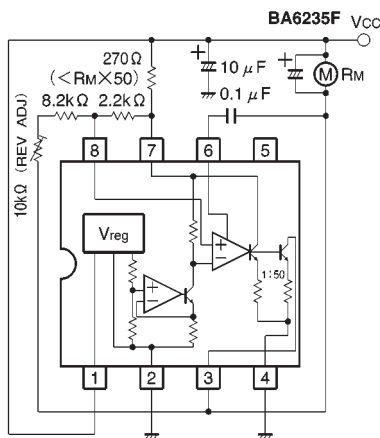

● External dimensions (Units: mm)

