




15W Ultraminiature Open Frame Global Switching Power Supplies

**ASL15** series

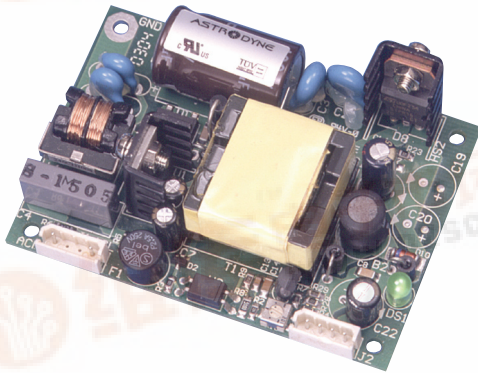

3"W x 2.10"L x 0.86"H

- Universal 85-265VAC Input
- Molex Mini Connector I/O
- Regulated Outputs
- 3000V Isolation
- Single Output from 3.3 to 24 VDC



Model Number	Output Voltage	Output Amps (max)	(pk)
ASL-1500	3.3 VDC	3.5A	3.8A
ASL-1501	5 VDC	3A	3.6A
ASL-1502	12 VDC	1.25A	1.5A
ASL-1503	15VDC	1A	1.25A
ASL-1505	24VDC	0.63A	0.75A





## 15W Ultraminiature Open Frame Global Switching Power Supplies

## ASL15 series

### INPUT SPECIFICATIONS

Input Voltage Range	85-265 VAC
Frequency Range	47-63 Hz
Inrush Current, typ:	20A @ 100VAC Input *
	40A @ 200VAC Input *

### OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Chart
Load Regulation	+/- 3% (20% to 100% Load)
Line Regulation	Singles +/- 0.1~1%, typ
Cross Regulation (Duals)	2%
Preset Accuracy	1%
DC Voltage Adjust (typ)	+/- 6% of FS (Primary)
Temperature Coefficient	+/-0.03%/°C
Ripple/Noise	100mV Pk-Pk, typ
Over Voltage Protection	Clamp, 130-150% *
Over Temp. Protection	Latching, Cool and Repower
Short Circuit Protection	Continuous, self-recovering
Hold Up Time	20 mS, typ

### GENERAL SPECIFICATIONS

Isolation	I/P-O/P:3000VAC
	I/P-Ground: 2500VAC
	O/P-Ground: 1000VAC
Efficiency	75%~78%, typ
Switching Frequency	100Khz, (fixed, typical)
Safety	UL60950-1, EN60950, IEC60950


### PHYSICAL SPECIFICATIONS

Size	3" x 2.10" x 0.85"
Construction	Open Frame
Weight	2.5oz (70g)
Connectors: Molex P/N:	50-37-5043 (Input)
	50-37-5043 (Output)
	Contact: 08-70-1040

### ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +50°C(FL) See Derate
Storage Temperature	-25 to +71°C *
Relative Humidity	0 to + 95%, non-cond *
EMC	FCC/A, VDE 0871/A
MTBF	180,000 Hrs
	Mil Std 217, 25°C

### OUTPUT DERATING CURVE

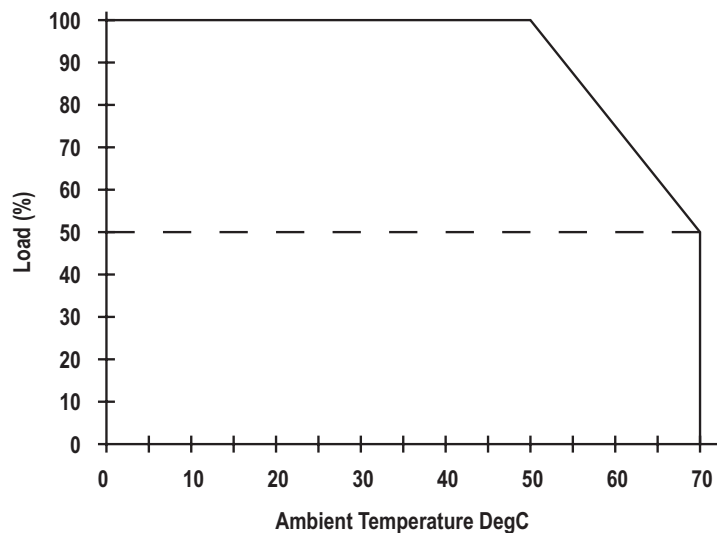

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted

\* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.


**Astrodyne products are not authorized or warranted for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.**



15W Ultraminiature Open Frame Global Switching Power Supplies

**ASL15** series

## MECHANICAL DIMENSIONS

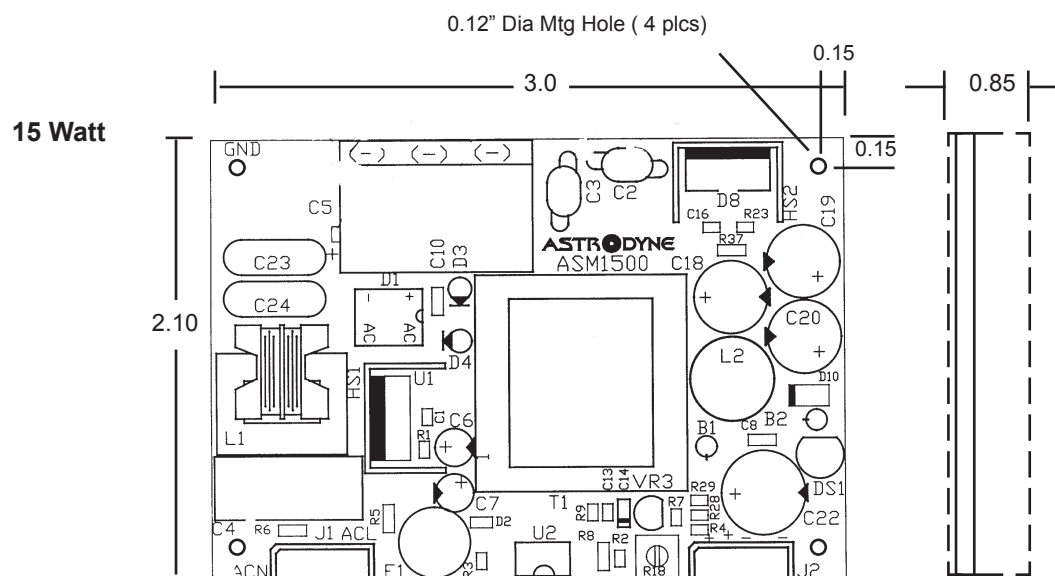

### J1 (AC Input)

Pin 1	AC Neutral
Pin 2	N/C
Pin 3	N/C
Pin 4	AC Line

### J2 (DC Output)

Pin 1	Com. Return
Pin 2	Com. Return
Pin 3	+Vout
Pin 4	+Vout