



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO.,LTD

## TO-251 Plastic-Encapsulate Transistors

## C 2611

TRANSISTOR ( NPN )

## FEATURES

Power dissipation

 $P_{CM} : 1 \text{ W (Tamb=25)}$ 

Collector current

 $I_{CM} : 0.2 \text{ A}$ 

Collector-base voltage

 $V_{(BR)CBO} : 600 \text{ V}$ 

Operating and storage junction temperature range

 $T_J, T_{stg} : -55 \text{ to } +150$ 

## ELECTRICAL CHARACTERISTICS ( Tamb=25


unless otherwise specified)

## TO—251

1. EMITTER

2.COLLECTOR

3.BASE



Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu A, I_E = 0$	600			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1 \text{ mA}, I_B = 0$	400			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100 \mu A, I_C = 0$	7			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = 600 \text{ V}, I_E = 0$			100	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE} = 400 \text{ V}, I_B = 0$			200	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 7 \text{ V}, I_C = 0$			100	$\mu A$
DC current gain	$h_{FE(1)}$	$V_{CE} = 20 \text{ V}, I_C = 20 \text{ mA}$	10		40	
	$h_{FE(2)}$	$V_{CE} = 10 \text{ V}, I_C = 0.25 \text{ mA}$	5			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50 \text{ mA}, I_B = 10 \text{ mA}$			0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 50 \text{ mA}, I_B = 10 \text{ mA}$			1.2	V
Transition frequency	$f_T$	$V_{CE} = 20 \text{ V}, I_C = 20 \text{ mA}$ $f = 1 \text{ MHz}$	8			MHz
Fall time	$t_f$	$I_C = 50 \text{ mA}, I_{B1} = -I_{B2} = 5 \text{ mA}$			0.3	$\mu s$
Storage time	$t_s$	$V_{CC} = 45 \text{ V}$			1.5	$\mu s$

CLASSIFICATION OF  $h_{FE(1)}$ 

Rank						
Range	10-15	15-20	20-25	25-30	30-35	35-40



## Typical Characteristics

**C2611**

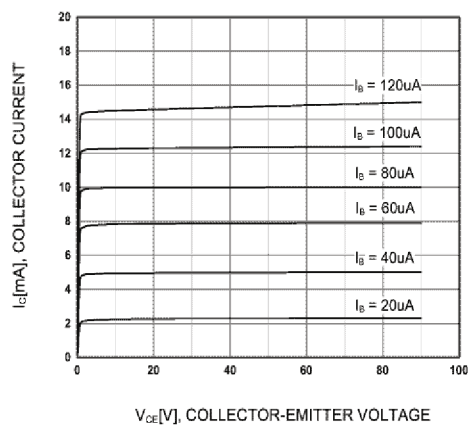


Figure 1. Static Characteristic

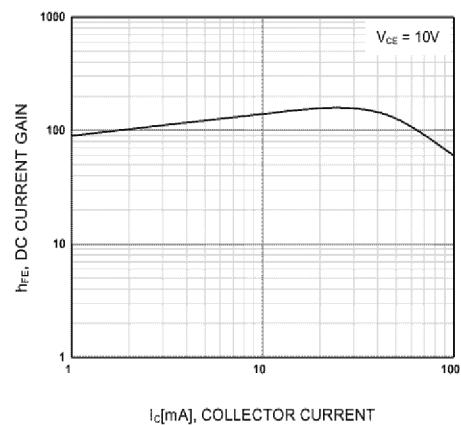


Figure 2. DC current Gain

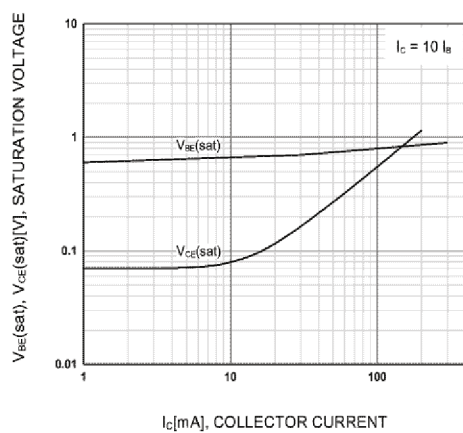


Figure 3. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage



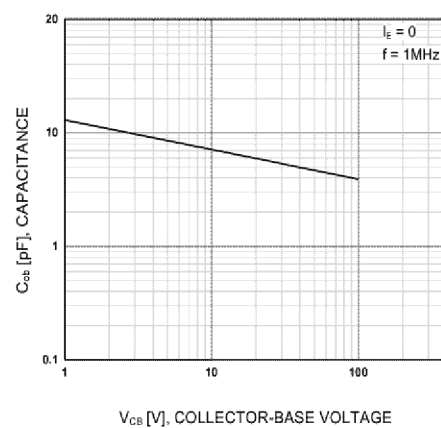


Figure 4. Collector Output Capacitance

## TO-251 PACKAGE OUTLINE DIMENSIONS

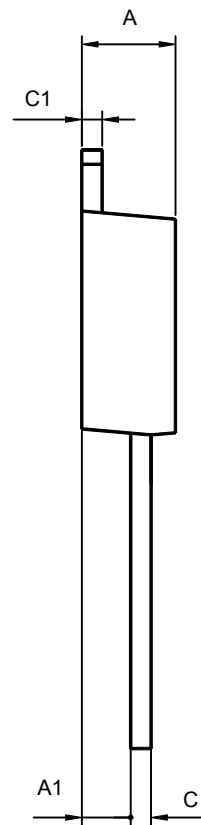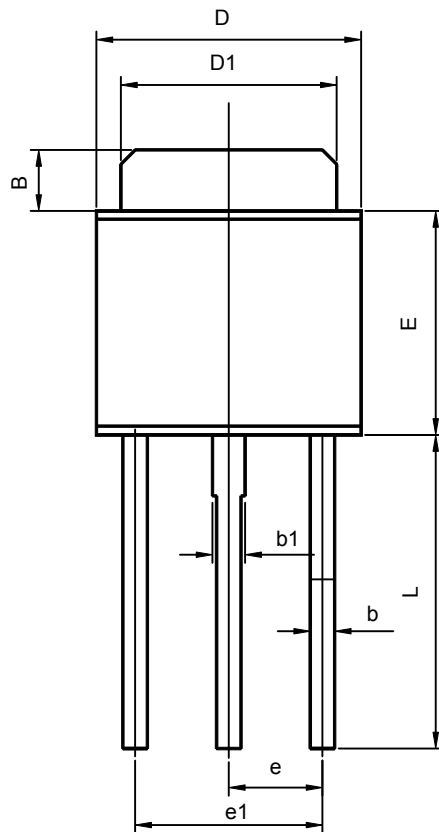

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	1.020	1.270	0.040	0.050
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311