



# ADVANCED MULTI-CHEMISTRY AND MULTI-CELL SYNCHRONOUS SWITCH-MODE CHARGER AND SYSTEM POWER SELECTOR

## FEATURES

- High Efficiency NMOS-NMOS Synchronous Buck Converter With User-Selectable 300 kHz or 500 kHz frequency
- SBS-Like <sup>(1)</sup> SMBus Interface for Control and Status Communications With Host
- Programmable Battery Voltage, Charge Current, and AC Adapter Current via SBS-Like SMBus Interface
- 0.4% Charge Voltage Regulation Accuracy
- 3% Charge Current Regulation Accuracy
- 3% Adapter Current Regulation Accuracy
- Dynamic Power Management (DPM)
- 2% Accuracy Integrated Charge and AC Adapter 20x Current Amplifier Output
- Battery Pack Voltage Range 0 V – 19.2 V
- AC Adapter Operating Range 8 V – 28 V
- 99.5% Max Duty Cycle
- Internal Soft Start
- Integrated 5% 5-V LDO When AC Adapter Applied
- 6-V Drive Supply Voltage for Increased Efficiency
- Reverse Battery to Adapter Discharge Protection
- Battery/Adapter to System Power Selector Function
- Charge and Adapter Overcurrent Protection
- Battery Thermistor Sense, TS, Comparators
- Available in 32-Pin 5x5mm QFN Package

## APPLICATIONS

- Portable Notebook Computers
- Portable DVD Players
- Webpads, PC Tablets

## DESCRIPTION

The bq24721 is a simple to use, high efficiency synchronous battery pack charger with high level of integration for portable applications. This device implements a high performance analog front-end that easily interfaces to the system power management micro-controller through a simplified SBS-like SMBus interface.


The dynamic power management (DPM) function modifies the charge current depending on system load conditions, avoiding ac adapter overload.

High accuracy current sense amplifiers enable accurate measurement of either the charge current or the ac adapter current, allowing termination of nonsmart packs and monitoring of overall system power.

The adapter isolation diode can be bypassed with an external MOSFET using a control signal provided by the bq24721, thus reducing overall power dissipation.

Integrated features such as charger soft start, charge overcurrent protection, and IC temperature monitoring provide a second level of protection, in addition to pack and system protection functions.

5x5 QFN PACKAGE (TOP VIEW)

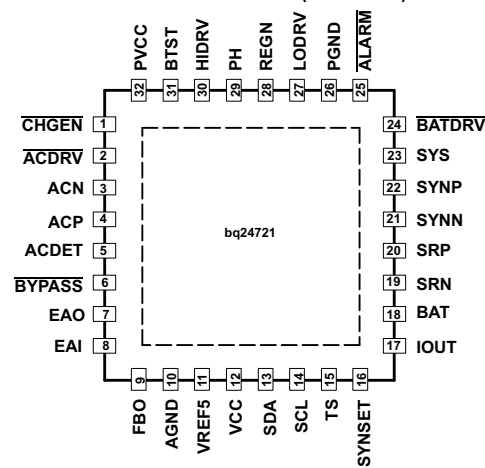

(1) SBS-Like interface is not 100% SBS compliant. SBS-Like interface is SMBus1.1 compliant but does not support Packet Error Correction (PEC). The control and status registers were changed to simplify and enhance notebook charger control. An eight bit address (0x12) is used. See [Table 1](#) for a comparison between SBS-like vs SBS Specification.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### ORDERING INFORMATION

| PART NO. | PACKAGE             | THERMISTOR SENSE | BATTERY SHORTED (VERY LOW BATTERY VOLTAGE) OPERATION | ORDERING NUMBER (TAPE AND REEL) | QUANTITY |
|----------|---------------------|------------------|--|---------------------------------|----------|
| bq24721  | 32 PIN<br>5x5mm QFN | TS               | Charge Current Changes to<br>C/8                     | bq24721RHBR                     | 3000     |
|          |                     |                  |  | bq24721RHBT                     | 250      |

### PACKAGE THERMAL DATA

| PACKAGE <sup>(1)</sup> | $\theta_{JA}$ | $T_A \leq 40^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ |
|------------------------|---------------|---|---|
| RHB <sup>(2)</sup>     | 36°C/W        | 2.36 W                                      | 0.028 W/°C  |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).
- (2) This data is based on using the JEDEC High-K board and the exposed die pad is connected to a copper pad on the board. This is connected to the ground plane by a 2x3 via matrix.

### DEVICE INFORMATION

#### TERMINAL FUNCTIONS

| TERMINAL          |     | DESCRIPTION  | TERMINAL          |    | DESCRIPTION   |
|-------------------|-----|--|-------------------|----|---|
| NAME              | NO. |  | NAME              | NO |   |
| <del>CHGEN</del>  | 1   | Charge enable logic level low input                                    | IOUT              | 17 | Battery charger or adapter current amplifier output                         |
| <del>ACDRV</del>  | 2   | AC adapter to system switch driver output                              | BAT               | 18 | Battery voltage remote sense  |
| ACN               | 3   | Adapter current sense resistor, negative input                         | SRN               | 19 | Charge current sense resistor, negative input                               |
| ACP               | 4   | Adapter current sense resistor, positive input                         | SRP               | 20 | Charge current sense resistor, positive input                               |
| ACDET             | 5   | AC adapter detected sense voltage input                                | SYNN              | 21 | SROC and SRUC, Negative sense resistor in                                   |
| <del>BYPASS</del> | 6   | Adapter Schottky diode bypass switch                                   | SYNP              | 22 | SROC and SRUC, Positive sense resistor in                                   |
| EAO               | 7   | Error amplifier output for compensation                                | SYS               | 23 | System load, voltage sense  |
| EAI               | 8   | Error amplifier input for compensation                                 | <del>BATDRV</del> | 24 | Battery to system switch driver output                                      |
| FBO               | 9   | Feedback output for compensation                                       | <del>ALARM</del>  | 25 | Alarm indicating charger status change, open-drain output                   |
| AGND              | 10  | Analog ground  | PGND              | 26 | Power ground  |
| VREF5             | 11  | 5V regulated voltage output. Can be used to indicate ac present status | LODRV             | 27 | PWM low side driver output  |
| VCC               | 12  | IC analog positive supply  | REGN              | 28 | Low-side driver gate voltage regulator. Add 1uF filter capacitor            |
| SDA               | 13  | SMBus Data input   | PH                | 29 | High-side driver negative supply, connect neg-side of boot-strap capacitor  |
| SCL               | 14  | SMBus Clock input  | HIDRV             | 30 | PWM high side driver output   |
| TS                | 15  | Thermistor sense input   | BTST              | 31 | High-side driver positive supply, connect pos-side of boot-strap capacitor. |
| ISYNSET           | 16  | Program SRUC of charge regulator                                       | PVCC              | 32 | IC power positive supply  |

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)(2)</sup>

| PARAMETER   | PIN   | VALUE / UNIT    |
|---|---|-----------------|
| Supply voltage range                                  | ACN, ACP, PVCC, $\overline{\text{ACDRV}}$ , SYNN, SYNP, SRP, SRN, BATDRV, BAT, BYPASS, SYS, VCC                               | –0.3 V to 30 V  |
|   | PH  | –1 V to 30 V    |
|   | LODRV, REGN, FBO, EAI, EAO, ISYNSET, $\overline{\text{CHGEN}}$ , TS, VREF5, ACDET, IOUT, $\overline{\text{ALARM}}$ , SCL, SDA | –0.3 V to 7 V   |
|   | BTST, HIDRV (with respect to AGND and PGND)   | –1 V to 36 V    |
| Maximum differential voltage                          | AGND-PGND   | –0.3 V to 0.3 V |
| Maximum difference voltage                            | ACP–ACN, SRP–SRN, and SYNP–SYNN   | 0.6 V           |
| Maximum voltage with respect to VCC                   | SRN, SRP, SYNN, SYNP, BAT, PH   | –20 V to 30 V   |
| Maximum difference voltage                            | PVCC-BAT, SYS–BAT   | –20 V to 30 V   |
| Operating ambient temperature range (T <sub>A</sub> ) |   | –40°C to 85°C   |
| Maximum junction temperature (T <sub>J_MAX</sub> )    |   | 150°C           |
| Storage temperature range (T <sub>stg</sub> )         |   | –65°C to 150°C  |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to AGND, unless otherwise noted. Currents are positive into, negative out of the specified terminal. Consult Packaging Section of the Databook for thermal limitations and considerations of packages.

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER                                     | PIN  | MIN  | NOM | MAX | UNIT |
|---|--|------|-----|-----|------|
| Supply voltage range                          | ACN, ACP, PVCC, $\overline{\text{ACDRV}}$ , SRP, SRN, BATDRV, BAT, BYPASS, SYS, VCC, SYNN, SYNP    | 0    |     | 24  | V    |
|   | PH   | –0.5 |     | 30  | V    |
|   | LODRV, REGN, VREF5   | 0    |     | 6.5 | V    |
|   | FBO, EAI, EAO, ISYNSET, $\overline{\text{CHGEN}}$ , TS, ACDET, SCL, SDA, $\overline{\text{ALARM}}$ | 0    |     | 5.5 | V    |
|   | IOUT, ACDET  | 0    |     | 5.5 | V    |
|   | BTST, HIDRV  | 0    |     | 30  | V    |
| Maximum differential voltage                  | AGND-PGND  |      |     | 0   | V    |
| Maximum difference voltage                    | ACP–ACN, SYNN–SYNP, SRP–SRN  |      |     | 0.5 | V    |
| Maximum voltage with respect to VCC           | SRN, SRP, SYNN, SYNP, BAT, PH  | –19  |     | 24  | V    |
| Maximum difference voltage                    | SYS–BAT, PVCC-BAT  | –19  |     | 24  | V    |
| Junction temperature Range (T <sub>J</sub> )  |  | 0    |     | 125 | °C   |
| Storage temperature Range (T <sub>stg</sub> ) |  | –55  |     | 150 | °C   |

## ELECTRICAL CHARACTERISTICS

8 Vdc ≤ V<sub>(VCC)</sub> ≤ 24 Vdc, 0°C ≤ T<sub>J</sub> ≤ 125°C, all voltages with respect to AGND (unless otherwise noted)

| PARAMETER   |   | TEST CONDITIONS  | MIN  | TYP | MAX    | UNIT |
|---|---|--|--|-----|--------|------|
| <b>BATTERY VOLTAGE REGULATION</b>   |   |  |  |     |        |      |
| V <sub>BAT_ICR</sub>  | VBAT Input voltage range  | V <sub>(BAT)</sub>   | 0  |     | PVCC   | V    |
|   | Battery Regulation Voltage Accuracy                             | Full valid voltage DAC range,<br>SMBus DAC register 0x15   | T <sub>J</sub> = 0°C – 85°C<br>–0.4  |     | 0.4    | %    |
|   |   |  | T <sub>J</sub> = 0°C – 125°C<br>–0.5   |     | 0.5    | %    |
| V <sub>(VBATREG)</sub>  | BAT voltage regulation range                                    |  | 9  |     | 19.2   | V    |
| <b>PWM AC ADAPTER INPUT CURRENT REGULATION, DPM (Dynamic Power Management)</b>      |   |  |  |     |        |      |
| V <sub>(IREG_DPM)</sub>   | ACP-ACN differential voltage range for input current regulation | V <sub>(IREG_DPM)</sub> = V <sub>(ACP)</sub> - V <sub>(ACN)</sub><br>SMBus DAC register 0x3F, bits b0–b13  | 1.28   |     | 162.56 | mV   |
| I <sub>(REG_step_DPM)</sub>   | Current regulation LSB programming current step                 | V <sub>(ACP-ACN)</sub> / 10mΩ<br>Using a 10mΩ sense resistor, R <sub>(SNS)</sub>   |  | 128 |        | mA   |
|   | Current regulation accuracy                                     | V <sub>CC</sub> ≥ V <sub>CC</sub> (min),<br>V <sub>CC</sub> ≥ V <sub>(IBAT)</sub> + V <sub>(DO-MAX)</sub> <sup>(1)</sup><br>Over differential threshold range, V <sub>(IREG)</sub> ,<br>Does not include error induced by the<br>tolerance of the sense resistor, R <sub>(SNS)</sub> | V <sub>(ACP)</sub> - V <sub>(ACN)</sub> > 40.96 mV<br>(4096 mA with 10 mΩ)<br>–3 |     | 3      | %    |
|   |   |  | V <sub>(ACP)</sub> - V <sub>(ACN)</sub> > 20.48 mV<br>(2048 mA with 10 mΩ)<br>–5 |     | 5      | %    |
|   |   |  | V <sub>(ACP)</sub> - V <sub>(ACN)</sub> > 5.12 mV<br>(512 mA with 10 mΩ)<br>–25  |     | 25     | %    |
| <b>PWM BATTERY CHARGE CURRENT REGULATION</b>  |   |  |  |     |        |      |
| V <sub>(IREG_CHG)</sub>   | SRP-SRN differential voltage range for input current regulation | V <sub>(IREG_CHG)</sub> = V <sub>(SRP)</sub> - V <sub>(SRN)</sub><br>SMBus DAC register 0x14, bits b0–b13  | 1.28   |     | 162.56 | mV   |
| I <sub>(REG_step_CHG)</sub>   | Current regulation LSB programming current step                 | V <sub>(SRP-SRN)</sub> / 10 mΩ<br>Using a 10mΩ sense resistor, R <sub>(SNS)</sub>  |  | 128 |        | mA   |
|   | Current regulation accuracy                                     | V <sub>CC</sub> ≥ V <sub>CC</sub> (min),<br>V <sub>CC</sub> ≥ V <sub>(IBAT)</sub> + V <sub>(DO-MAX)</sub> <sup>(1)</sup><br>Over differential threshold range, V <sub>(IREG)</sub> ,<br>Does not include error induced by the<br>tolerance of the sense resistor, R <sub>(SNS)</sub> | V <sub>(SRP-SRN)</sub> > 40.96 mV<br>(4096 mA with 10 mΩ)<br>–3                  |     | 3      | %    |
|   |   |  | V <sub>(SRP-SRN)</sub> > 20.48 mV<br>(2048 mA with 10 mΩ)<br>–5                  |     | 5      | %    |
|   |   |  | V <sub>(SRP-SRN)</sub> > 5.12 mV<br>(512 mA with 10 mΩ)<br>–25                   |     | 25     | %    |
| <b>CHARGE CURRENT AMPLIFIER – IBAT AMPLIFIER and IADAPT AMPLIFIER → MUX TO IOUT</b> |   |  |  |     |        |      |
| V <sub>(IOUT_IBAT)</sub>  | SRP, SRN common-mode input voltage range                        |  | 2.5  |     | 20     | V    |
|   | IOUT output voltage range with IBAT selected                    | V <sub>(IOUT)</sub> = V <sub>(SRP, SRN)</sub> × A <sub>(IBAT)</sub><br>V <sub>(BAT)</sub> > 2.5 V or V <sub>(BAT)</sub> > V <sub>(IOUT)</sub> + V <sub>(DO-MAX)</sub> <sup>(1)</sup>   | 0  |     | 3.5    | V    |
| A <sub>(IBAT)</sub>   | Voltage gain  | A <sub>(IOUT)</sub> = V <sub>(IOUT)</sub> / V <sub>(SRP, SRN)</sub>  |  | 20  |        | V/V  |
|   | Charge current amplifier accuracy                               | V <sub>(BAT)</sub> > 2.5 V or V <sub>(BAT)</sub> > V <sub>(IOUT)</sub> + V <sub>(DO-MAX)</sub> <sup>(1)</sup>  | V <sub>(SRP, SRN)</sub> = 40 mV and higher<br>–2                                 |     | 2      | %    |
|   |   |  | V <sub>(SRP, SRN)</sub> = 20 mV and higher<br>–3                                 |     | 3      | %    |
|   |   |  | V <sub>(SRP, SRN)</sub> = 5 mV and higher<br>–25                                 |     | 25     | %    |
| V <sub>(IOUT_IADAPT)</sub>  | ACP, ACN Common-mode input voltage range                        |  | 0  |     | 24     | V    |
|   | IOUT output voltage range with IADAPT selected                  | V <sub>(IOUT)</sub> = V <sub>(ACP, ACN)</sub> × A <sub>(IADP)</sub><br>V <sub>(SRP)</sub> > 2.5 V or V <sub>(SRP)</sub> > V <sub>(IOUT)</sub> + 1V   | 0  |     | 3.5    | V    |
| A <sub>(IADP)</sub>   | Voltage gain  | A <sub>(IADP)</sub> = V <sub>(IOUT)</sub> / V <sub>(ACP, ACN)</sub>  |  | 20  |        | V/V  |
|   | Adapter current amplifier accuracy                              | V <sub>(BAT)</sub> > 2.5 V or V <sub>(BAT)</sub> > V <sub>(IOUT)</sub> + V <sub>(DO-MAX)</sub> <sup>(1)</sup>  | V <sub>(ACP, ACN)</sub> = 40 mV and higher<br>–2                                 |     | 2      | %    |
|   |   |  | V <sub>(ACP, ACN)</sub> = 30 mV and higher<br>–3                                 |     | 3      | %    |
|   |   |  | V <sub>(ACP, ACN)</sub> = 5 mV and higher<br>–25                                 |     | 25     | %    |
| I <sub>(IOUT_LIM)</sub>   | IOUT output current limit                                       | IOUT shorted to AGND   | 4.5  |     |        | mA   |

(1) V<sub>(DO-max)</sub> is defined as the maximum drop-out voltage. V<sub>(DO-max)</sub> = 1 V unless other wise specified. In an actual application, V<sub>(DO - MAX)</sub> = (R<sub>(SNS)</sub> × I<sub>O</sub>) + V<sub>(DSON\_HIGH\_SIDE\_FET)</sub> + V<sub>(DSON\_BYPASS\_FET)</sub>.

## ELECTRICAL CHARACTERISTICS

8 Vdc ≤ V<sub>(VCC)</sub> ≤ 24 Vdc, 0°C ≤ T<sub>J</sub> ≤ 125°C, all voltages with respect to AGND (unless otherwise noted)

|  | PARAMETER  | TEST CONDITIONS  | MIN  | TYP | MAX  | UNIT |
|--|--|--|------|-----|------|------|
| <b>OPERATING CONDITIONS</b>  |  |  |      |     |      |      |
| V <sub>(INOP)</sub>  | V <sub>(VCC)</sub> , V <sub>(PVCC)</sub> , input voltage operating range | Selector and charger operational.  | 8    |     | 24   | V    |
| <b>QUIESCENT CURRENT – NO ADAPTER CONNECTED</b>  |  |  |      |     |      |      |
| I <sub>(VCC,PVCC)</sub>  | VCC and PVCC quiescent current   | I <sub>(VCC,PVCC)</sub> = ( I <sub>(VCC)</sub> + I <sub>(PVCC)</sub> ) at V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V  |      |     | 254  | μA   |
| I <sub>(ACP,ACN)</sub>   | ACP and ACN quiescent current  | I <sub>(ACP,ACN)</sub> = ( I <sub>(ACP)</sub> + I <sub>(ACN)</sub> ) at V <sub>(ACP)</sub> = V <sub>(ACN)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V  |      |     | 1    | μA   |
| I <sub>(BAT)</sub>   | BAT quiescent current  | I <sub>(BAT)</sub> at V <sub>(BAT)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 17   | μA   |
| I <sub>(SRP,SRN)</sub>   | SRP and SRN quiescent current  | I <sub>(SRP,SRN)</sub> = ( I <sub>(SRP)</sub> + I <sub>(SRN)</sub> ) at V <sub>(SRP)</sub> = V <sub>(SRN)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V  |      |     | 1    | μA   |
| I <sub>(SYNN,SYNP)</sub>   | SYNN and SYNP quiescent current  | I <sub>(SYNN,SYNP)</sub> = ( I <sub>(SYNN)</sub> + I <sub>(SYNP)</sub> ) at V <sub>(SYNP)</sub> = V <sub>(SYNN)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V  |      |     | 1    | μA   |
| I <sub>(SYS)</sub>   | SYS quiescent current  | I <sub>(SYS)</sub> at V <sub>(SYS)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 25   | μA   |
| I <sub>(PH)</sub>  | PH quiescent current   | I <sub>(PH)</sub> at V <sub>(PH)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 1    | μA   |
| I <sub>(BTST)</sub>  | BTST quiescent current   | I <sub>(BTST)</sub> at V <sub>(BTST)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 1    | μA   |
| <b>QUIESCENT CURRENT – ADAPTER CONNECTED AND READY TO CHARGE</b>                           |  |  |      |     |      |      |
| I <sub>(VCC,PVCC)</sub>  | VCC and PVCC quiescent current   | I <sub>(VCC,PVCC)</sub> = (I <sub>(VCC)</sub> + I <sub>(PVCC)</sub> ) at V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 4.45 | mA   |
| I <sub>(ACP,ACN)</sub>   | ACP and ACN quiescent current  | I <sub>(ACP,ACN)</sub> = (I <sub>(ACP)</sub> + I <sub>(ACN)</sub> ) at V <sub>(ACP)</sub> = V <sub>(ACN)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 815  | μA   |
| I <sub>(BAT)</sub>   | BAT quiescent current  | I <sub>(BAT)</sub> at V <sub>(BAT)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 500  | μA   |
| I <sub>(SRP,SRN)</sub>   | SRP and SRN quiescent current  | I <sub>(SRP,SRN)</sub> = ( I <sub>(SRP)</sub> + I <sub>(SRN)</sub> ) at V <sub>(SRP)</sub> = V <sub>(SRN)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V  |      |     | 305  | μA   |
| I <sub>(SYNN,SYNP,SYS)</sub>   | SYNN, SYNP, and SYS quiescent current                                    | I <sub>(SYNN,SYNP,SYS)</sub> = ( I <sub>(SYNN)</sub> + I <sub>(SYNP)</sub> + I <sub>(SYS)</sub> ) at V <sub>(SYNP)</sub> = V <sub>(SYNN)</sub> = V <sub>(SYS)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V              |      |     | 321  | μA   |
| I <sub>(PH)</sub>  | PH quiescent current   | I <sub>(PH)</sub> at V <sub>(PH)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 1    | μA   |
| I <sub>(BTST)</sub>  | BTST quiescent current   | I <sub>(BTST)</sub> at V <sub>(BTST)</sub> = V <sub>(VCC)</sub> = V <sub>(PVCC)</sub> = 16.8 V   |      |     | 1    | μA   |
| I <sub>(VCC_SW)</sub>  | VCC Current while converter is switching including gate drive current    | I <sub>(VCC_SW)</sub> = I <sub>(VCC)</sub><br>FPWM = 300 kHz, charger on (CHGEN = LO) = ENABLED<br>Qg at HIDRV = Qg at LODRV = 30 nC, [No Load on VREF5]<br>Gate drive switching current = Qg × FPWM = (30nC + 30nC) × 300kHz = 18mA |      | 25  |      | mA   |
| <b>5V REFERENCE LDO VOLTAGE AND AC DETECTION STATUS (VREF5, turns-on when AC detected)</b> |  |  |      |     |      |      |
| V <sub>VREF5</sub>   | 5V Regulator output voltage  | Adapter detected (V <sub>ACDET</sub> > V <sub>(ACD)</sub> ), V <sub>CC</sub> > 7 V<br>0 → 10 mA, source current  | 4.75 | 5   | 5.25 | V    |
| V <sub>VREF5_SAT</sub>   | Saturation voltage when VREF5 is off                                     | Adapter not detected, (V <sub>ACDET</sub> < V <sub>(ACD)</sub> )<br>0 → 10 mA, ac adapter inserted, C <sub>O</sub> = 1 μF, discharge Load  |      |     | 0.3  | V    |
| I <sub>VREF5_LIM</sub>   | Short-circuit current  | V <sub>(VREF5)</sub> = AGND  |      | 20  |      | mA   |
| <b>UNDERVOLTAGE LOCKOUT CIRCUIT</b>  |  |  |      |     |      |      |
| UVLO   | Under voltage lockout threshold  | VREF5 rising, POR mode set at VREF5 < V <sub>(UVLO)</sub>  |      | 3.7 |      | V    |
|  | V <sub>(UVLO)</sub> hysteresis   | VREF5 falling  |      | 100 |      | mV   |
| <b>SBS-Like SMBus LOGIC LEVELS</b>   |  |  |      |     |      |      |
| V <sub>IL</sub>  | Input low threshold level  | 2.7 V < V <sub>(pull-up)</sub> < 5.5 V, SDA and SCL  |      |     | 0.8  | V    |
| V <sub>IH</sub>  | Input high threshold level   | 2.7 V < V <sub>(pull-up)</sub> < 5.5 V, SDA and SCL  | 2.1  |     |      | V    |
| I <sub>bias</sub>  | Input bias current   | 2.7 V < V <sub>(pull-up)</sub> < 5.5 V, SDA and SCL  |      |     | 1    | μA   |
| <b>ALARM OPEN DRAIN OUTPUTS</b>  |  |  |      |     |      |      |
| V <sub>(ALARM_sat)</sub>   | ALARM output low saturation level  | I <sub>(ALARM)</sub> = 5mA   |      |     | 0.5  | V    |
| I <sub>lkg(ALARM)</sub>  | ALARM leakage current  | V <sub>ALARM</sub> = 5V  |      |     | 1    | μA   |
| <b>THERMAL SHUTDOWN</b>  |  |  |      |     |      |      |
| T <sub>(SHUT)</sub>  | Thermal shutdown Threshold   | T <sub>J</sub> rising, Charge disabled at T <sub>J</sub> > T <sub>(SHUT)</sub>   |      | 145 |      | °C   |
| T <sub>(SHUTH)</sub>   | Hysteresis   | T <sub>J</sub> falling, Charge enabled at T <sub>J</sub> < T <sub>(SHUT)</sub> – T <sub>(SHUTH)</sub>  |      | 15  |      | °C   |
|  | Deglitch time, thermal shutdown  | T <sub>J</sub> rising/falling  |      | 8   |      | ms   |

**ELECTRICAL CHARACTERISTICS (continued)**

8 Vdc  $\leq V_{(VCC)} \leq 24$  Vdc,  $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ , all voltages with respect to AGND (unless otherwise noted)

|                                      | PARAMETER   | TEST CONDITIONS   | MIN   | TYP  | MAX   | UNIT               |
|--------------------------------------|---|---|-------|------|-------|--------------------|
| <b>THERMISTOR COMPARATORS, TS</b>    |   |   |       |      |       |                    |
| $V_{(LTF)}$                          | Cold temperature threshold, TS pin voltage              | $V_{(TS)}$ rising   | 72.8  | 73.5 | 74.2  | %VREF5             |
| $V_{(LTFH)}$                         | Hysteresis for LTF threshold                            | $V_{(TS)}$ falling  | 0.5   | 1    | 1.5   | %VREF5             |
| $V_{(TCO)}$                          | Cutoff temperature threshold, TS pin voltage            | $V_{(TS)}$ rising   | 28.7  | 29.3 | 29.9  | %VREF5             |
| $V_{(HTF)}$                          | Hot temperature threshold, TS pin voltage               | $V_{(TS)}$ rising/falling   | 33.7  | 34.4 | 35.1  | %VREF5             |
| $V_{(TSDDET)}$                       | Pack thermistor insertion detected                      | $V_{(TS)}$ rising/falling   | 82.45 | 85   | 87.55 | %VREF5             |
|                                      | Deglintch time for temperature out of range detection   | $V_{(TS)}$ rising above $V_{(LTF)}$ , or $V_{(TS)}$ falling below $V_{(TCO)}$ , or $V_{(TS)}$ falling below $V_{(HTF)}$               |       | 16   |       | $\mu\text{s}$      |
|                                      | Deglintch time for temperature in valid range detection | $V_{(TS)}$ falling below $(V_{(LTF)} - V_{(LTFH)})$ , or $V_{(TS)}$ rising above $V_{(TCO)}$ , or $V_{(TS)}$ rising above $V_{(HTF)}$ |       | 8    |       | ms                 |
|                                      | Deglintch time for thermistor removal detection         | $V_{(TS)}$ rising above $V_{(TSDDET)}$<br>$V_{(TS)} > V_{(TSDDET)}$ (pack removed)  |       | 16   |       | $\mu\text{s}$      |
|                                      | Deglintch time for thermistor insertion detection       | $V_{(TS)}$ falling below $V_{(TSDDET)}$<br>$V_{(TS)} < V_{(TSDDET)}$ (pack inserted)  |       | 1    |       | s                  |
| <b>CHARGE OVERCURRENT COMPARATOR</b> |   |   |       |      |       |                    |
| $V_{(OLP)}$                          | Overcurrent protection threshold                        | $V_{(SRP-SRN)}$ rising  |       | 200  |       | % $I_{(REG\_CHG)}$ |
| $V_{(OLPH)}$                         | Hysteresis  | $V_{(SRP-SRN)}$ falling   |       | 20   |       | % $I_{(REG\_CHG)}$ |

## ELECTRICAL CHARACTERISTICS

8 Vdc ≤ V<sub>(VCC)</sub> ≤ 24 Vdc, 0°C ≤ T<sub>J</sub> ≤ 125°C, all voltages with respect to AGND (unless otherwise noted)

|   | PARAMETER   | TEST CONDITIONS   | MIN   | TYP | MAX   | UNIT    |
|---|---|---|-------|-----|-------|---------|
| <b>SYSTEM STATUS COMPARATORS INPUT SPECIFICATIONS</b> |   |   |       |     |       |         |
| V <sub>ICR</sub>                                      | Common mode input range at pin: ACDET   |   | 0     |     | 5     | V       |
|   | Common mode input range at TS pin   |   | 0.5   |     | VREF5 | V       |
|   | Common mode input voltage range at pins: BAT, SYS                               |   | 0     |     | VCC   | V       |
| I <sub>(bias)</sub>                                   | Input bias currents at pins: ACDET, TS, BATDEP, SYS                             |   |       |     | 0.2   | μA      |
| <b>BATTERY DEPLETED COMPARATOR (BATDEP)</b>           |   |   |       |     |       |         |
| V <sub>(BATDEP)</sub>                                 | BAT depleted voltage range  | V <sub>(BATDEP)</sub> = 2.2 V + Vstep × batdep_dac_code, where batdep_dac_code = 0 - 7, and Vstep = 0.1V, SMBus Charge Mode register 0×12, bits b9, b10, b11<br>For programmed V <sub>(BATREG)</sub> = 9 V, then cell = 2<br>For programmed V <sub>(BATREG)</sub> = 12 V - 14.4 V, then cell = 3<br>For programmed V <sub>(BATREG)</sub> = 16 V - 19.2 V, then cell = 4 | 2.2   |     | 2.9   | V/cell  |
|   | BAT depleted accuracy   |   | -2    |     | 2     | %       |
|   | Battery depleted detection deglitch time  | V <sub>(BAT)</sub> falling  |       | 1   |       | s       |
|   | Battery not depleted detection deglitch time                                    | V <sub>(BAT)</sub> rising   |       | 1   |       | s       |
| <b>AC ADAPTER DETECT COMPARATOR (ACDET)</b>           |   |   |       |     |       |         |
| V <sub>(ACD)</sub>                                    | AC adapter detect threshold   | V <sub>(ACDET)</sub> rising, When adapter detected, VREF5 is enabled, and REGN regulates to 6 V   | 1.176 | 1.2 | 1.224 | V       |
| V <sub>(ACDH)</sub>                                   | AC adapter detect hysteresis  | V <sub>(ACDET)</sub> falling  |       | 15  |       | mV      |
|   | AC adapter detected deglitch time   | V <sub>(ACDET)</sub> rising   |       | 8   |       | ms      |
|   | AC adapter not detected deglitch time   | V <sub>(ACDET)</sub> falling  |       | 1   |       | μs      |
| <b>AC ADAPTER (ACP) - BATTERY (BAT) COMPARATOR</b>    |   |   |       |     |       |         |
| V <sub>(ACP-BAT)</sub>                                | ACP voltage above BAT voltage threshold   | V <sub>(ACP)</sub> falling with respect to V <sub>(BAT)</sub>   |       | 250 | 300   | mV      |
| V <sub>(ACP-BAT)HYS</sub>                             | Hysteresis  | V <sub>(ACP-BAT)</sub> rising with respect to V <sub>(BAT)</sub>  |       | 50  |       | mV      |
|   | V <sub>(ACP-BAT)</sub> falling below threshold deglitch time                    | V <sub>(ACP)</sub> falling with respect to V <sub>(BAT)</sub>   |       | 16  |       | μs      |
|   | V <sub>(ACP-BAT)</sub> rising above threshold deglitch time                     | V <sub>(ACP-BAT)</sub> rising with respect to V <sub>(BAT)</sub>  |       | 8   |       | ms      |
| <b>SYSTEM (SYS) - BATTERY (BAT) COMPARATOR</b>        |   |   |       |     |       |         |
| V <sub>(SYS-BAT)</sub>                                | System voltage above pack voltage at V <sub>(VS,BAT)</sub> > V <sub>(SYS)</sub> | V <sub>(SYS)</sub> falling with respect to V <sub>(BAT)</sub>   |       | 250 | 300   | mV      |
| V <sub>(SYS-BAT)HYS</sub>                             | Hysteresis  | V <sub>(SYS-BAT)</sub> rising with respect to V <sub>(BAT)</sub>  |       | 50  |       | mV      |
|   | V <sub>(SYS-BAT)</sub> falling below threshold deglitch time                    | V <sub>(SYS)</sub> falling with respect to V <sub>(BAT)</sub>   |       | 1   |       | μs      |
|   | V <sub>(SYS-BAT)</sub> rising above threshold deglitch time                     | V <sub>(SYS-BAT)</sub> rising with respect to V <sub>(BAT)</sub>  |       | 8   |       | ms      |
| <b>BATTERY SHORTED COMPARATOR</b>                     |   |   |       |     |       |         |
| V <sub>(BATSHORT)</sub>                               | Battery shorted threshold <sup>(1)</sup>  | V <sub>(BAT)</sub> falling, Programmed V <sub>(BAT)</sub> = 9V  | 3.230 | 3.4 | 3.570 | V       |
|   |   | V <sub>(BAT)</sub> falling, Programmed V <sub>(BAT)</sub> = 12-14.4V  | 4.845 | 5.1 | 5.355 | V       |
|   |   | V <sub>(BAT)</sub> falling, Programmed V <sub>(BAT)</sub> = 16-19.2V  | 6.460 | 6.8 | 7.140 | V       |
| V <sub>(SHRT_HYS)</sub>                               | Hysteresis  | V <sub>(BAT)</sub> rising   |       | 200 |       | mV/cell |
|   | Battery shorted deglitch time   | V <sub>(BAT)</sub> rising/falling   |       | 1   |       | s       |

- (1) For the bq24721: When BAT falls below the V<sub>(BATSHORT)</sub> threshold, the charger continues regulating at the programmed current down to zero volts on BAT; then after 1 second deglitch time, the charge current automatically changes to 1/8 the programmed charge current. The charge current automatically changes from 1/8 the programmed charge current to the full programmed charge current when BAT voltage rises above (V<sub>(BATSHORT)</sub> + 200 mV hysteresis), after 1 second deglitch time.

## ELECTRICAL CHARACTERISTICS

8 Vdc  $\leq V_{(VCC)} \leq 24$  Vdc,  $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ , all voltages with respect to AGND (unless otherwise noted)

|   | PARAMETER   | TEST CONDITIONS  | MIN | TYP  | MAX  | UNIT          |
|---|---|--|-----|------|------|---------------|
| <b>BYPASS P-Channel MOSFET DRIVER (BYPASS)</b>    |   |  |     |      |      |               |
| $R_{(DS\_BYP)} \text{ Hi}$                        | BYPASS off-state resistance   | Driver output = HI, $\overline{\text{BYPASS}} = V_{(PVCC)}$ , $V_{(PVCC)} = 18 \text{ V}$                            |     | 1    | 2    | k $\Omega$    |
| $R_{(DS\_BYP)} \text{ Lo}$                        | BYPASS on-state resistance  | Driver output = LO, $\text{BYPASS} = V_{(PVCC)} - V_{(REGBYPASS)}$ , $V_{(PVCC)} = 18 \text{ V}$                     |     | 1    | 2    | k $\Omega$    |
| $V_{(REGBYPASS)}$                                 | Drive regulator turn-on voltage for BYPASS with respect to $V_{(PVCC)}$         | $V_{(VCC, \overline{\text{BYPASS}})}$ , $V_{(VCC)} > 13 \text{ V}$ , $I_{(\text{BYPASS})} = 5 \text{ mA}$            | -5  | -6   | -7.5 | V             |
| <b>AC ADAPTER P-Channel MOSFET DRIVER (ACDRV)</b> |   |  |     |      |      |               |
| $R_{(DS\_AC)} \text{ Hi}$                         | ACDRV off-state resistance  | Driver output = HI, $\overline{\text{ACDRV}} = V_{(PVCC)}$ , $V_{(PVCC)} = 18 \text{ V}$                             |     | 100  | 150  | $\Omega$      |
| $R_{(DS\_AC)} \text{ Lo}$                         | ACDRV on-state resistance   | Driver output = LO, $\overline{\text{ACDRV}} = V_{(PVCC)} - V_{(REGAC)}$ , $V_{(PVCC)} = 18 \text{ V}$               |     | 10   | 20   | k $\Omega$    |
| $V_{(REGAC)}$                                     | Drive regulator turn-on voltage for ACDRV with respect to $V_{(PVCC)}$          | $V_{(VCC, \overline{\text{ACDRV}})}$ , $V_{(VCC)} > 13 \text{ V}$ , $I_{(\overline{\text{ACDRV}})} = 5 \text{ mA}$   | -5  | -6.5 | -7.5 | V             |
| <b>BATTERY P-Channel MOSFET DRIVER (BATDRV)</b>   |   |  |     |      |      |               |
| $R_{(DS\_BAT)} \text{ Hi}$                        | BATDRV off-state resistance   | Driver output = HI, $V_{(PVCC)} = 18 \text{ V}$  |     | 100  | 150  | $\Omega$      |
| $R_{(DS\_BAT)} \text{ Lo}$                        | BATDRV on-state resistance  | Driver output = LO, $\overline{\text{BATDRV}} = V_{(PVCC)} - V_{(REGBAT)}$ , $V_{(PVCC)} = 18 \text{ V}$             |     | 10   | 20   | k $\Omega$    |
| $V_{(REGBAT)}$                                    | Drive regulator negative turn-on voltage for BATDRV with respect to $V_{(SYS)}$ | $V_{(VCC, \overline{\text{BATDRV}})}$ , $V_{(VCC)} > 13 \text{ V}$ , $I_{(\overline{\text{BATDRV}})} = 5 \text{ mA}$ | -5  | -6.5 | -7.5 | V             |
| <b>SYSTEM POWER SELECTOR TIMING</b>               |   |  |     |      |      |               |
|   | Dead time when switching between ACDRV and BATDRV                               | No load at ACDRV and BATDRV  |     | 1    |      | $\mu\text{s}$ |
| <b>BYPASS SWITCH TIMING</b>                       |   |  |     |      |      |               |
|   | Delay to turn-off BYPASS  |  |     | 1    |      | $\mu\text{s}$ |



## ELECTRICAL CHARACTERISTICS

8 Vdc ≤ V<sub>(VCC)</sub> ≤ 24 Vdc, 0°C ≤ T<sub>j</sub> ≤ 125°C, all voltages with respect to AGND (unless otherwise noted)

|   | PARAMETER   | TEST CONDITIONS  | MIN | TYP     | MAX | UNIT    |
|---|---|--|-----|---------|-----|---------|
| <b>PWM HIGH-SIDE N-Channel MOSFET DRIVER (HIDRV)</b>    |   |  |     |         |     |         |
| R <sub>(DS_HIDRV)</sub><br>H <sub>i</sub>               | High-side on-state resistance   | HSD switch on, HIDRV = HI, V <sub>(BOOST,PH)</sub> = 5.5 V   |     | 2.2     | 3   | Ω       |
| R <sub>(DS_HIDRV)</sub><br>L <sub>o</sub>               | High-side off-state resistance  | HSD switch off, HIDRV = LO, V <sub>(BOOST,PH)</sub> = 5.5 V  |     | 1.5     | 2.5 | Ω       |
| <b>PWM LOW-SIDE N-Channel MOSFET DRIVER (LODRV)</b>     |   |  |     |         |     |         |
| R <sub>(DS_LODRV)</sub><br>H <sub>i</sub>               | Low-side on-state resistance  | LSD switch on, LODRV = HI, V <sub>(PVCC)</sub> = 7 V   |     | 2.2     | 3   | Ω       |
| R <sub>(DS_LODRV)</sub><br>L <sub>o</sub>               | Low-side off-state resistance   | LSD switch off, LODRV = LO, V <sub>(PVCC)</sub> = 7 V  |     | 1.5     | 2.5 | Ω       |
| <b>PWM LOW-SIDE DRIVER REGULATOR (REGN)</b>             |   |  |     |         |     |         |
| V <sub>O(HREGN)</sub>                                   | REGN output voltage   | V(REGN) at I(REGN) = 10 mA, sourcing,<br>Adapter detected (V <sub>ACDET</sub> > V <sub>(ACD)</sub> ), V <sub>(PVCC)</sub> > 7 V      | 5.5 | 6       | 6.5 | V       |
|   |   | V(REGN) at I(REGN) = 10 mA, sourcing,<br>Adapter not detected, (V <sub>ACDET</sub> < V <sub>(ACD)</sub> ), V <sub>(PVCC)</sub> > 7 V |     | 4.2     |     | V       |
| I <sub>O(REGN_SW)</sub>                                 | REGN output current while<br>charger switching  | 2 times 25 nC load, F <sub>s</sub> = 300 kHz   |     | 15      |     | mA      |
|   |   | 2 times 25 nC load, F <sub>s</sub> = 500 kHz   |     | 25      |     | mA      |
| I <sub>(REGN_LIM)</sub>                                 | REGN Current limit<br>Adapter detected  | VREGN = 5 V<br>Adapter detected (V <sub>ACDET</sub> > V <sub>(ACD)</sub> ), V <sub>(PVCC)</sub> > 7 V                                |     | 100     |     | mA      |
|   |   | VREGN = 0 V, shorted<br>Adapter detected (V <sub>ACDET</sub> > V <sub>(ACD)</sub> ), V <sub>(PVCC)</sub> > 7 V                       |     | 13.3    |     | mA      |
|   | REGN Current limit<br>Adapter not detected  | VREGN = 4.2 V<br>Adapter not detected, (V <sub>ACDET</sub> < V <sub>(ACD)</sub> ), V <sub>(PVCC)</sub> > 7 V                         |     | 15      |     | mA      |
| <b>PWM DRIVERS TIMING</b>                               |   |  |     |         |     |         |
|   | Dead time when switching<br>between LSD and HSD, no<br>load at LSD and HSD                      |  |     | 30      |     | ns      |
| <b>PWM OSCILLATOR</b>                                   |   |  |     |         |     |         |
| V <sub>(RAMPLO)</sub>                                   | PWM oscillator ramp voltage ,<br>low value  | 0% duty cycle occurs below this threshold  |     | 0.35    |     | V       |
| V <sub>(RAMPHI)</sub>                                   | PWM oscillator ramp voltage ,<br>high value   | near 100% duty cycle occurs above this threshold   |     |         | 3   | V       |
| V <sub>PP(RAMP)</sub>                                   | PWM ramp peak-to-peak<br>amplitude  |  |     | 0.1×VCC |     | V       |
| V <sub>(RAMPCL)</sub>                                   | PWM oscillator ramp clamp<br>voltage  |  |     | 3.5     |     | V       |
| F <sub>s</sub>  | PWM oscillator frequency (300<br>kHz)   |  | 265 | 300     | 345 | kHz     |
|   | PWM oscillator frequency (500<br>kHz)   |  | 425 | 500     | 575 | kHz     |
| <b>INTERNAL SOFT START (8 steps to I<sub>reg</sub>)</b> |   |  |     |         |     |         |
|   | SRSET pin voltage number of<br>steps during soft start.   | Eight steps of charge current regulation to get to programmed<br>value (SRSET = 1 V).  |     | 8       |     | step    |
|   | Step Duration.  | Eight steps of charge current regulation to get to programmed<br>value (SRSET = 1 V).  | 0.8 | 1       | 1.2 | ms/step |
| <b>CHARGER SECTION POWER-UP SEQUENCING</b>              |   |  |     |         |     |         |
|   | Time delay between power up<br>of charger block references<br>(first) and start charge (second) |  |     | 1       |     | ms      |
|   | Time delay from adapter<br>detected until ACDRV enable<br>and charger block enable              |  |     | 500     |     | ms      |

## TYPICAL CHARACTERISTICS

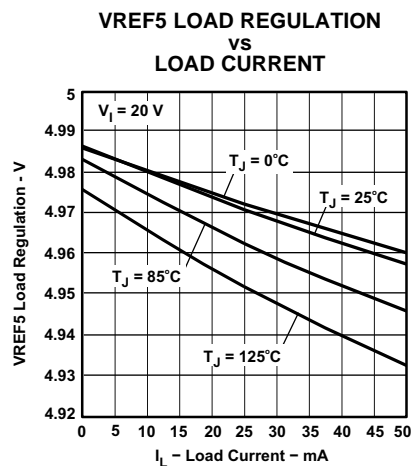


Figure 1.

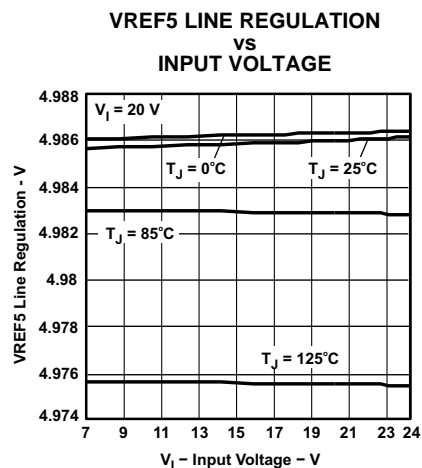


Figure 2.

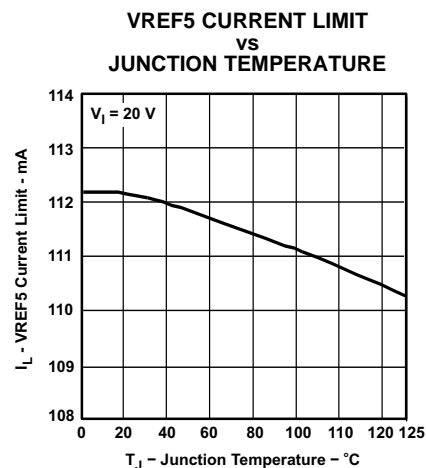


Figure 3.

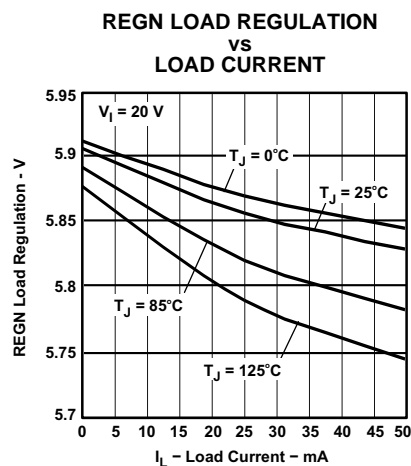


Figure 4.

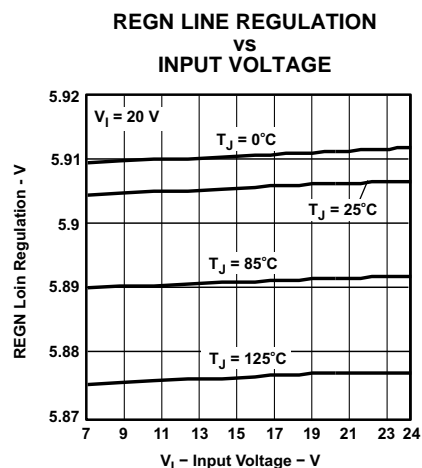


Figure 5.

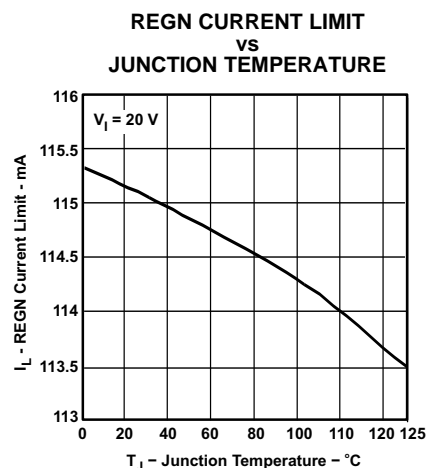


Figure 6.

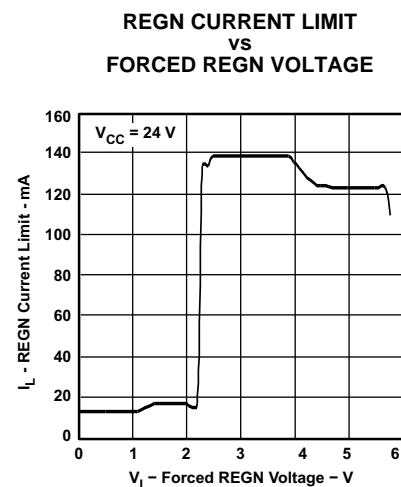


Figure 7.

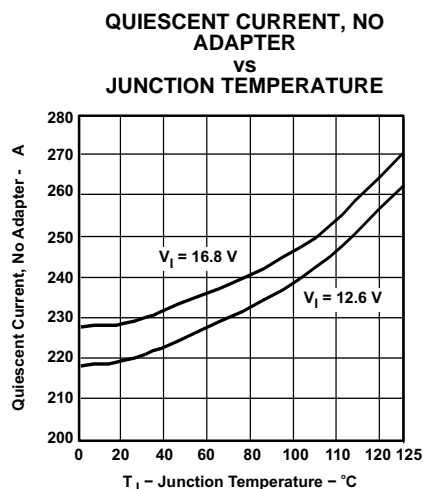


Figure 8.

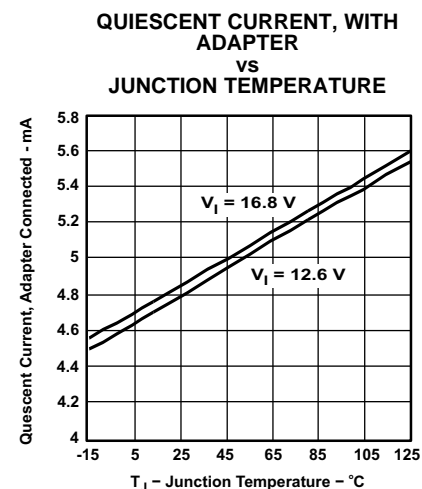


Figure 9.

## TYPICAL CHARACTERISTICS (continued)

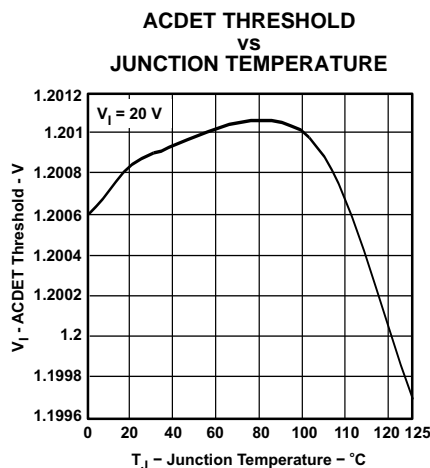


Figure 10.

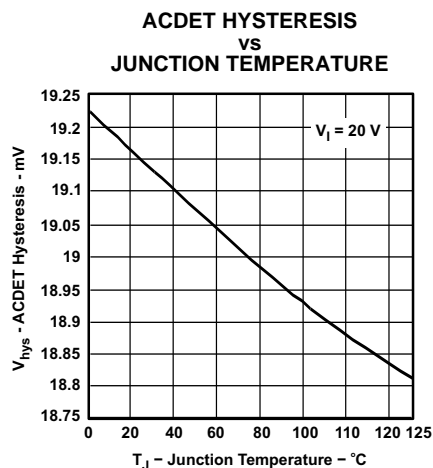


Figure 11.

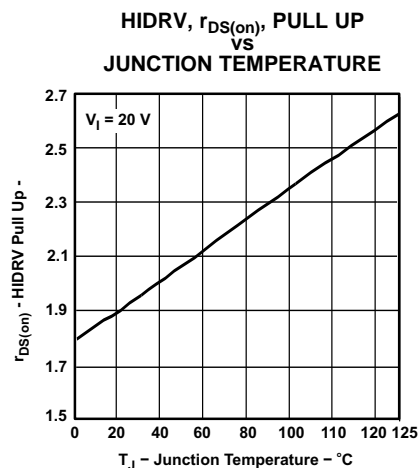


Figure 12.

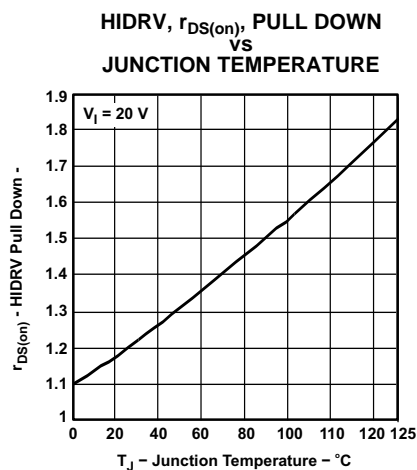


Figure 13.

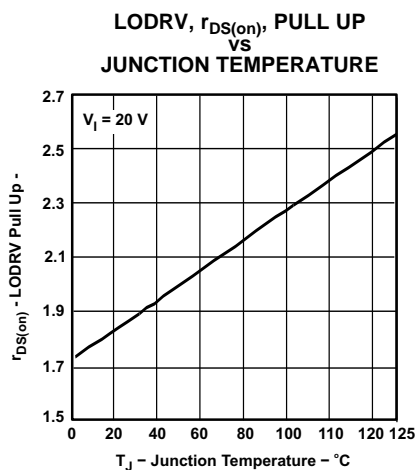


Figure 14.

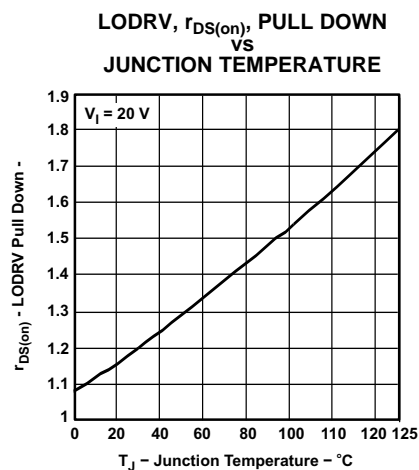


Figure 15.

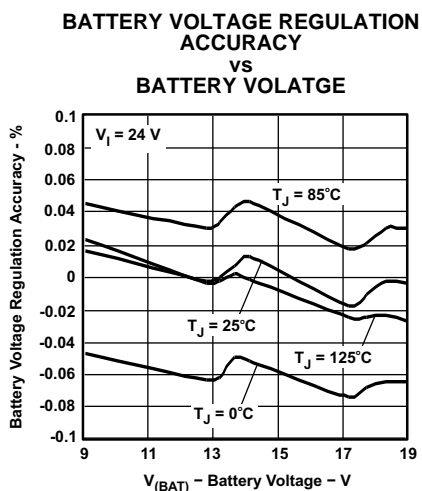


Figure 16.

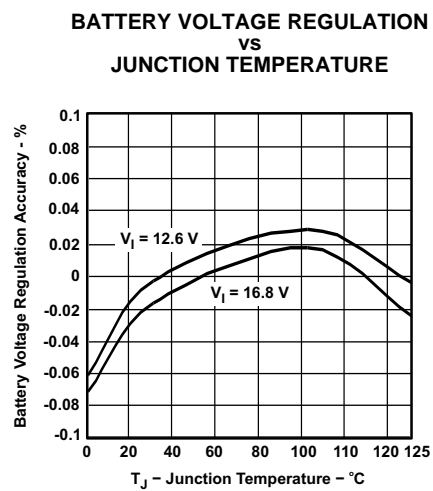


Figure 17.

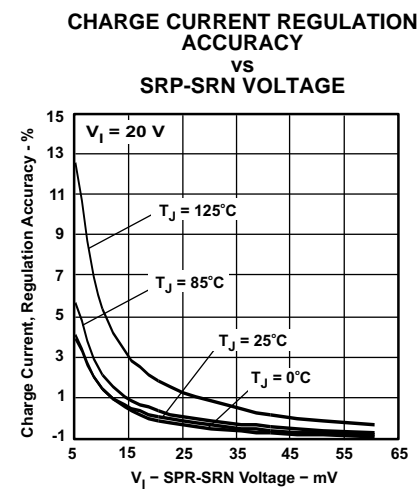


Figure 18.

## TYPICAL CHARACTERISTICS (continued)

**INPUT CURRENT REGULATION  
(DPM) ACCURACY  
VS  
ACP-ACN VOLTAGE**

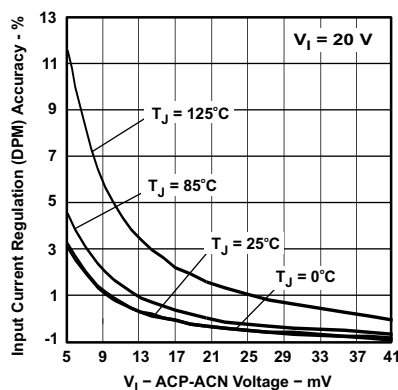


Figure 19.

**INPUT CURRENT REGULATION  
(DPM) ACCURACY  
VS  
INPUT VOLTAGE**

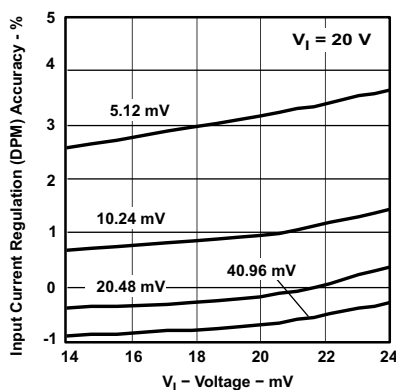


Figure 20.

**I<sub>O</sub> = DPM CURRENT SENSE  
AMPLIFIER ACCURACY  
VS  
ACP-ACN VOLTAGE**

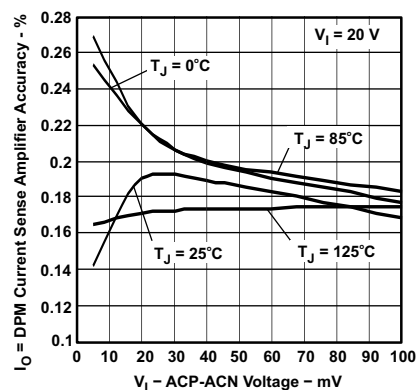


Figure 21.

**I<sub>O</sub> = DPM CURRENT SENSE  
AMPLIFIER OFFSET  
VS  
JUNCTION TEMPERATURE**

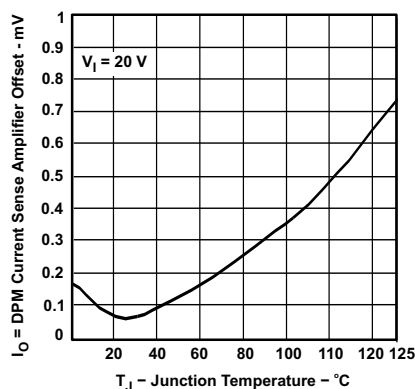


Figure 22.

**I<sub>O</sub> = ADAPTER OUTPUT CURRENT  
LIMIT  
VS  
JUNCTION TEMPERATURE**

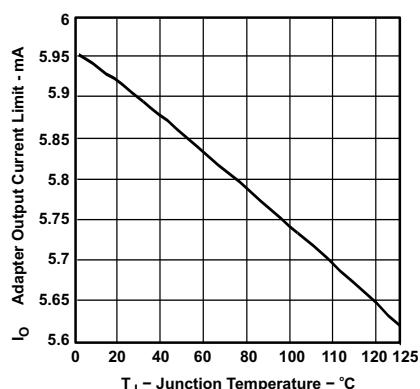


Figure 23.

**I<sub>O</sub> = CHARGE SENSE AMPLIFIER  
ACCURACY  
VS  
SRP-SRN VOLTAGE**

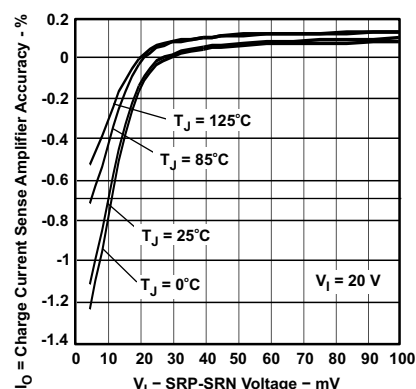


Figure 24.

**I<sub>O</sub> = CHARGE CURRENT LIMIT  
VS  
JUNCTION TEMPERATURE**

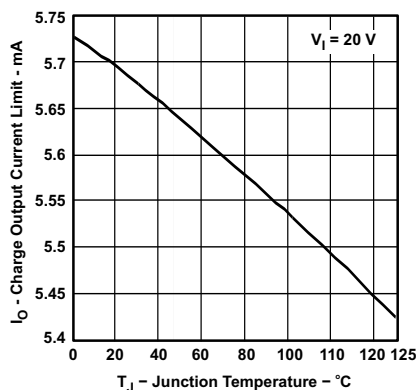


Figure 25.

**300-kHz SWITCHING FREQUENCY  
VS  
INPUT VOLTAGE**

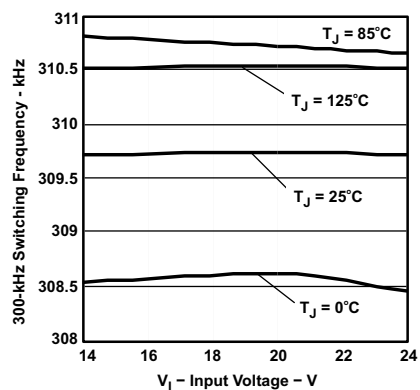


Figure 26.

**300-kHz SWITCHING FREQUENCY  
VS  
JUNCTION TEMPERATURE**

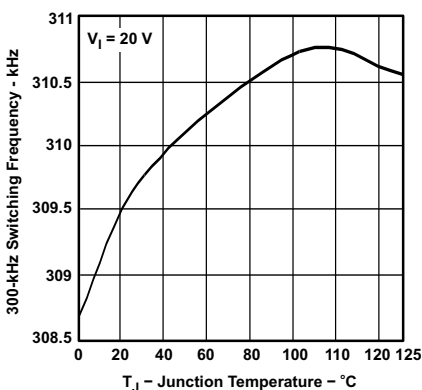


Figure 27.

## TYPICAL CHARACTERISTICS (continued)

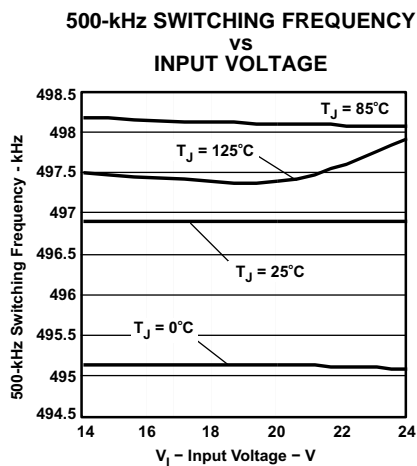


Figure 28.

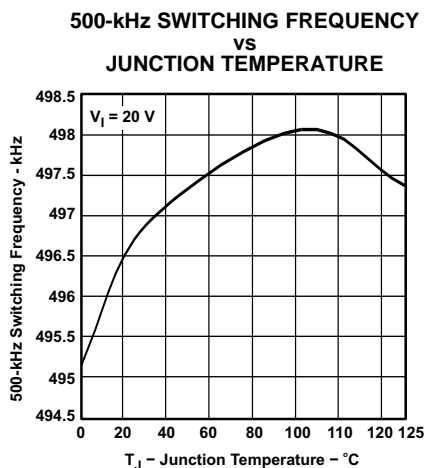


Figure 29.

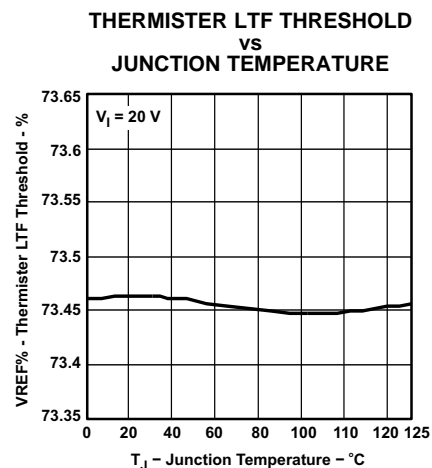


Figure 30.

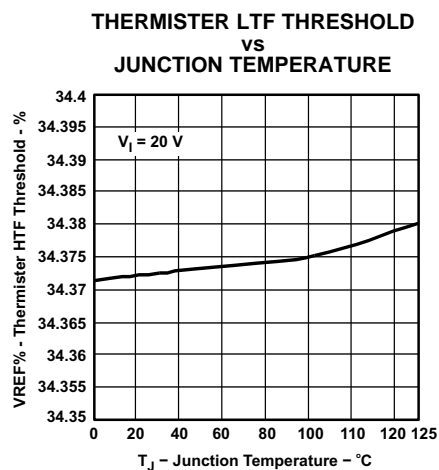


Figure 31.

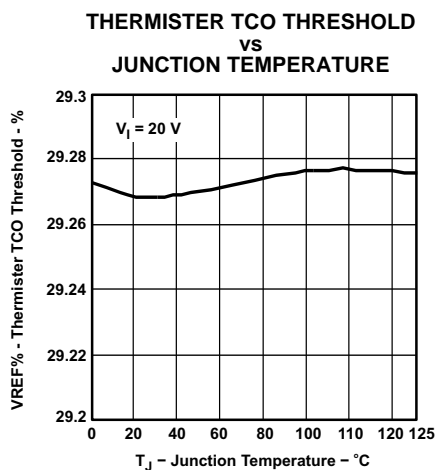


Figure 32.

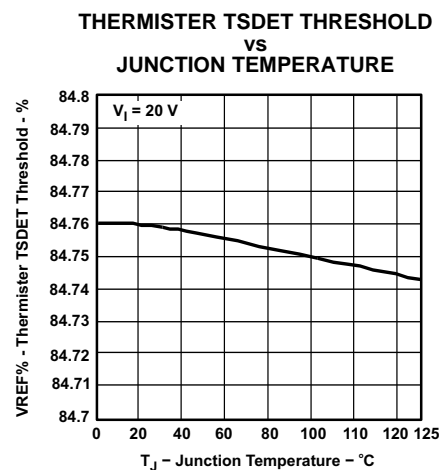


Figure 33.

**TYPICAL CHARACTERISTICS (continued)**

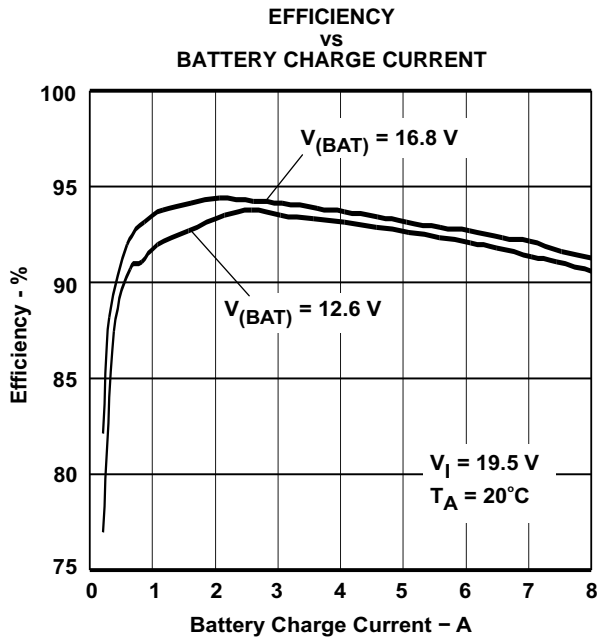


Figure 34.

**BATTERY REMOVAL (CONSTANT CURRENT MODE)**

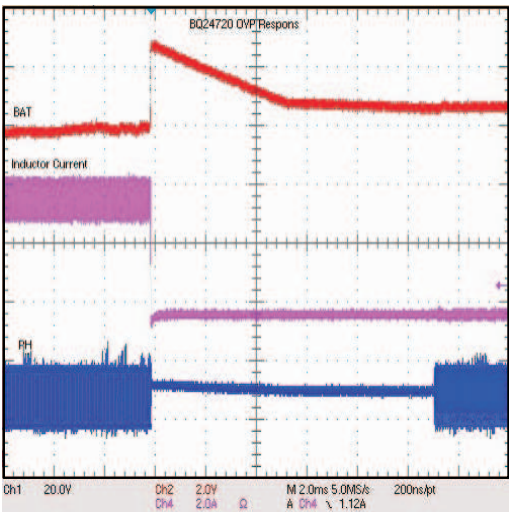


Figure 35.

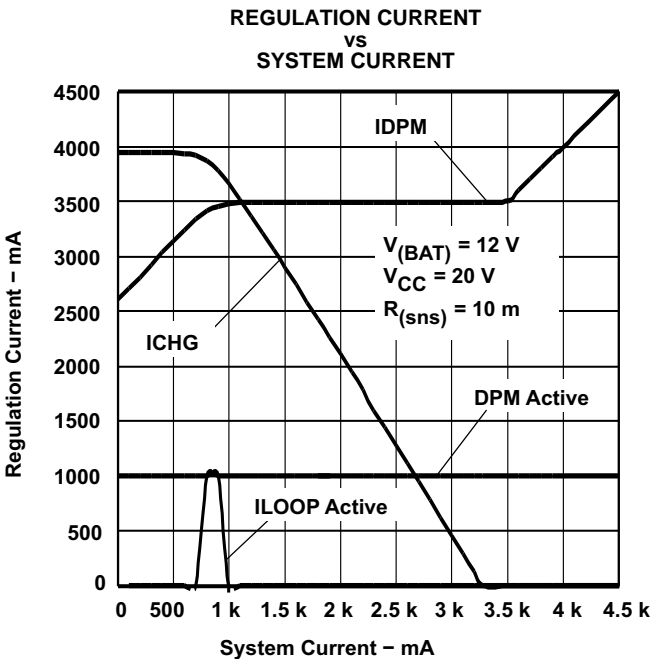


Figure 36.

**TRANSIENT SYSTEM LOAD**

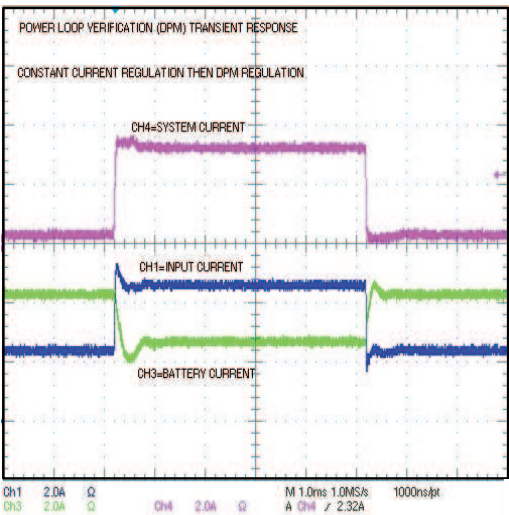


Figure 37.

## TYPICAL CHARACTERISTICS (continued)

SYSTEM SELECTOR GATE DRIVES AFTER ACDET

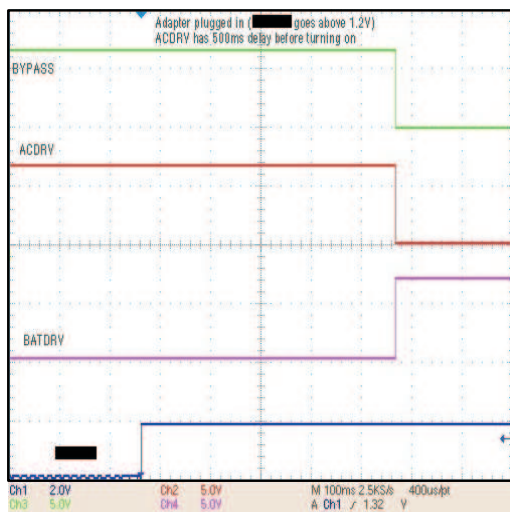


Figure 38.

SYSTEM SELECTOR ADAPTER INSERTION

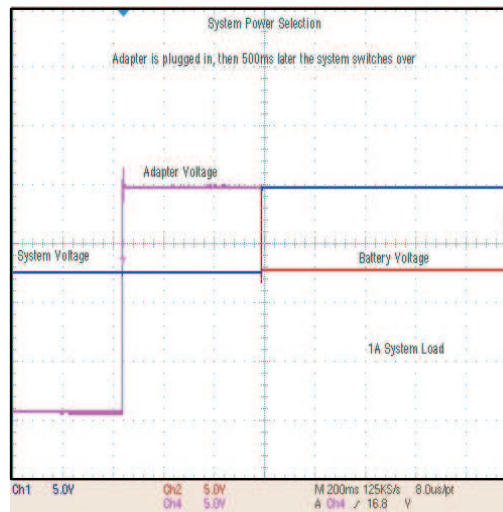


Figure 39.

SYSTEM SELECTOR ADAPTER REMOVAL

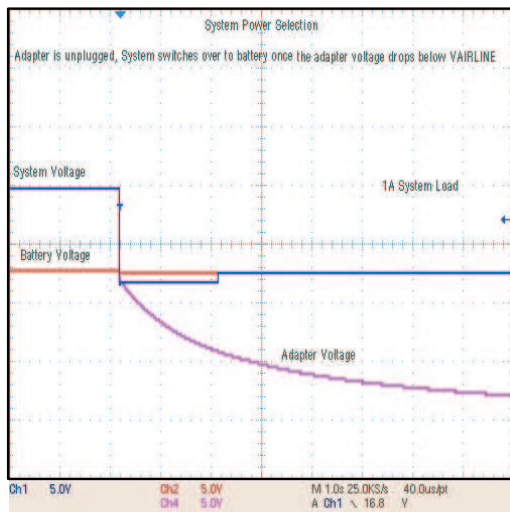


Figure 40.

REGN VREF5 POWER UP

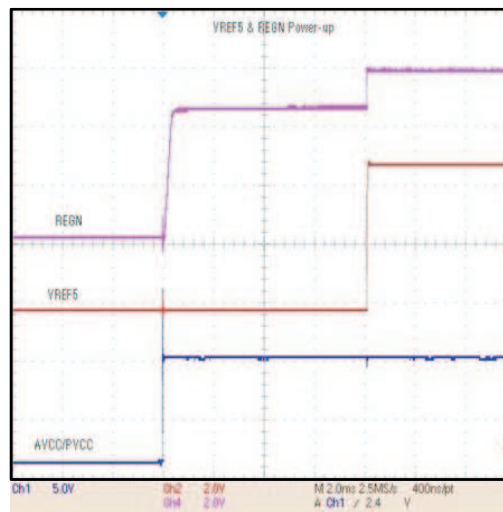


Figure 41.

## TYPICAL CHARACTERISTICS (continued)

### SOFTSTART CHARGE CURRENT

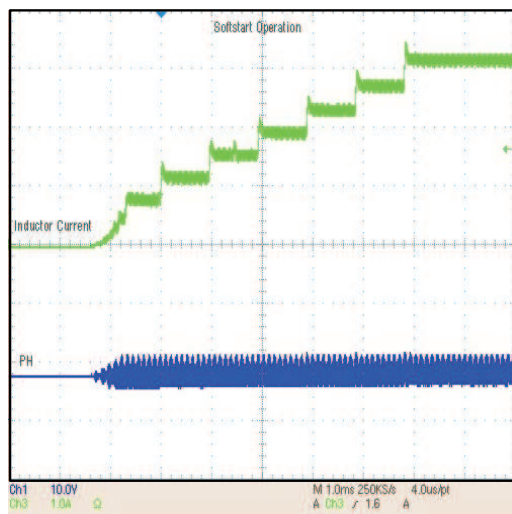


Figure 42.

### NON-SYNCHRONOUS TO SYNCHRONOUS TRANSITION

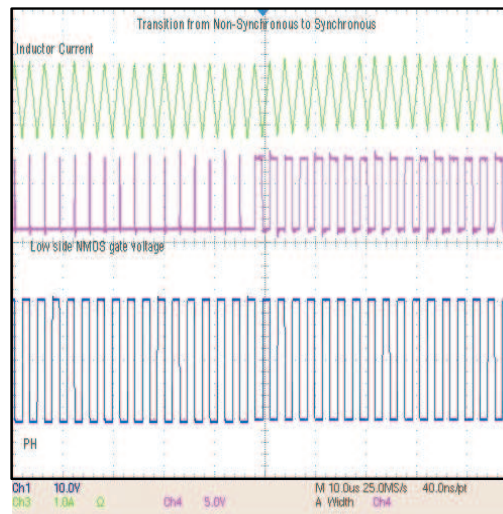


Figure 43.

### SYNCHRONOUS TO NON-SYNCHRONOUS TRANSITION

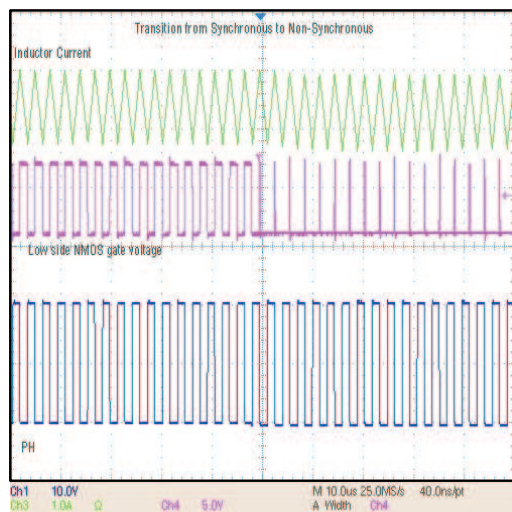


Figure 44.

### NEAR 100% DUTY CYCLE BTST RECHARGE PULSE

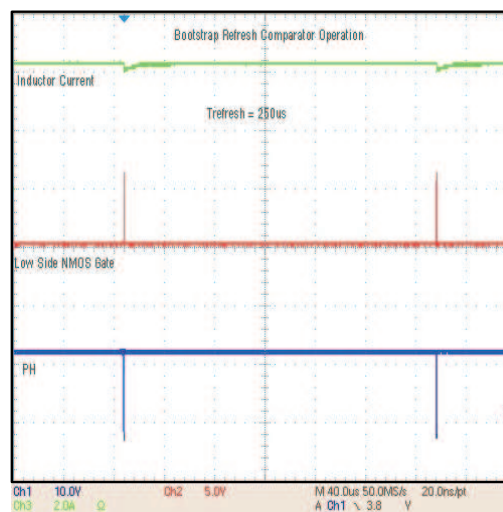


Figure 45.



## TYPICAL CHARACTERISTICS (continued)

**BATTERY SHORT RESPONSE**

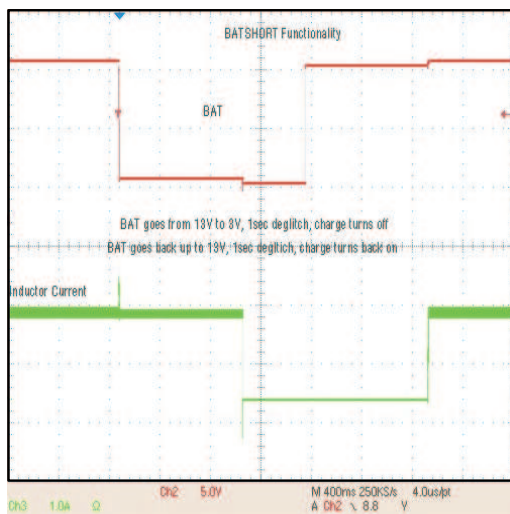


Figure 46.

**CHARGE OVERCURRENT**

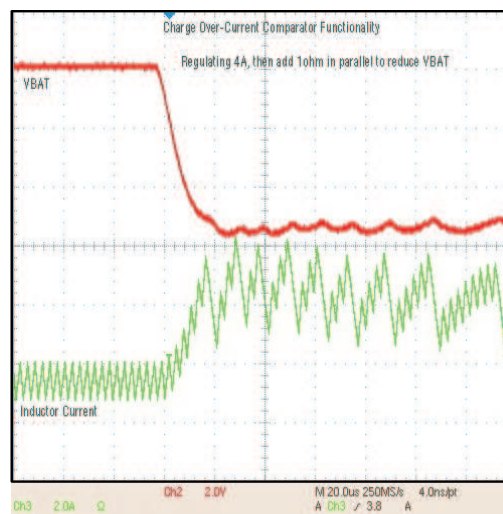


Figure 47.

**ACOC ACDRV TURN OFF (32- $\mu$ s DEGLITCH)**

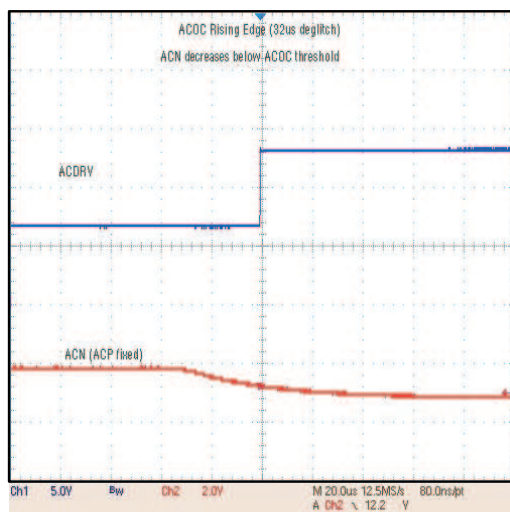


Figure 48.

**ACOC ACDRV TURN ON (500-ms DEGLITCH)**

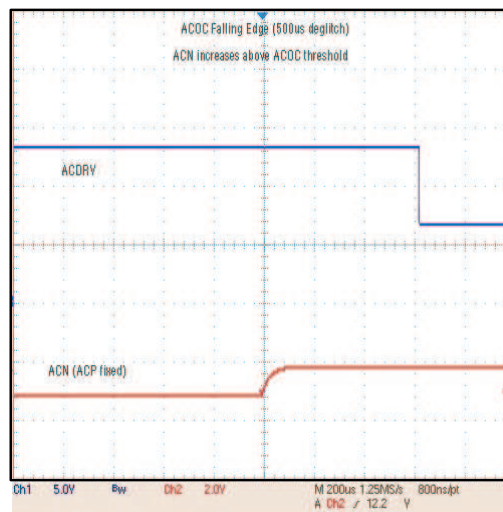


Figure 49.

## TYPICAL CHARACTERISTICS (continued)

### SWITCHING CONTINUOUS CURRENT MODE (CCM)

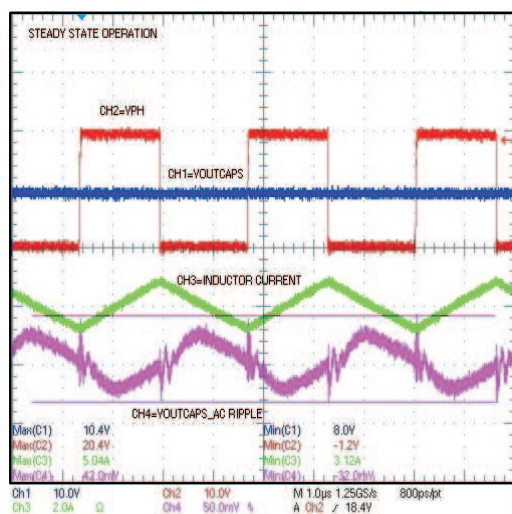


Figure 50.

### SWITCHING DISCONTINUOUS CURRENT MODE vs (DCM)

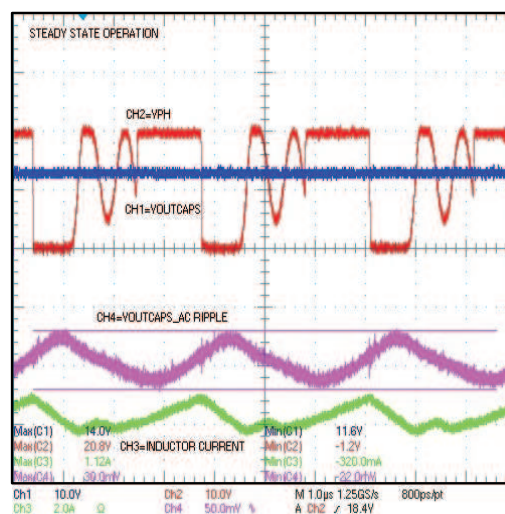


Figure 51.

## SIMPLIFIED BLOCK DIAGRAM


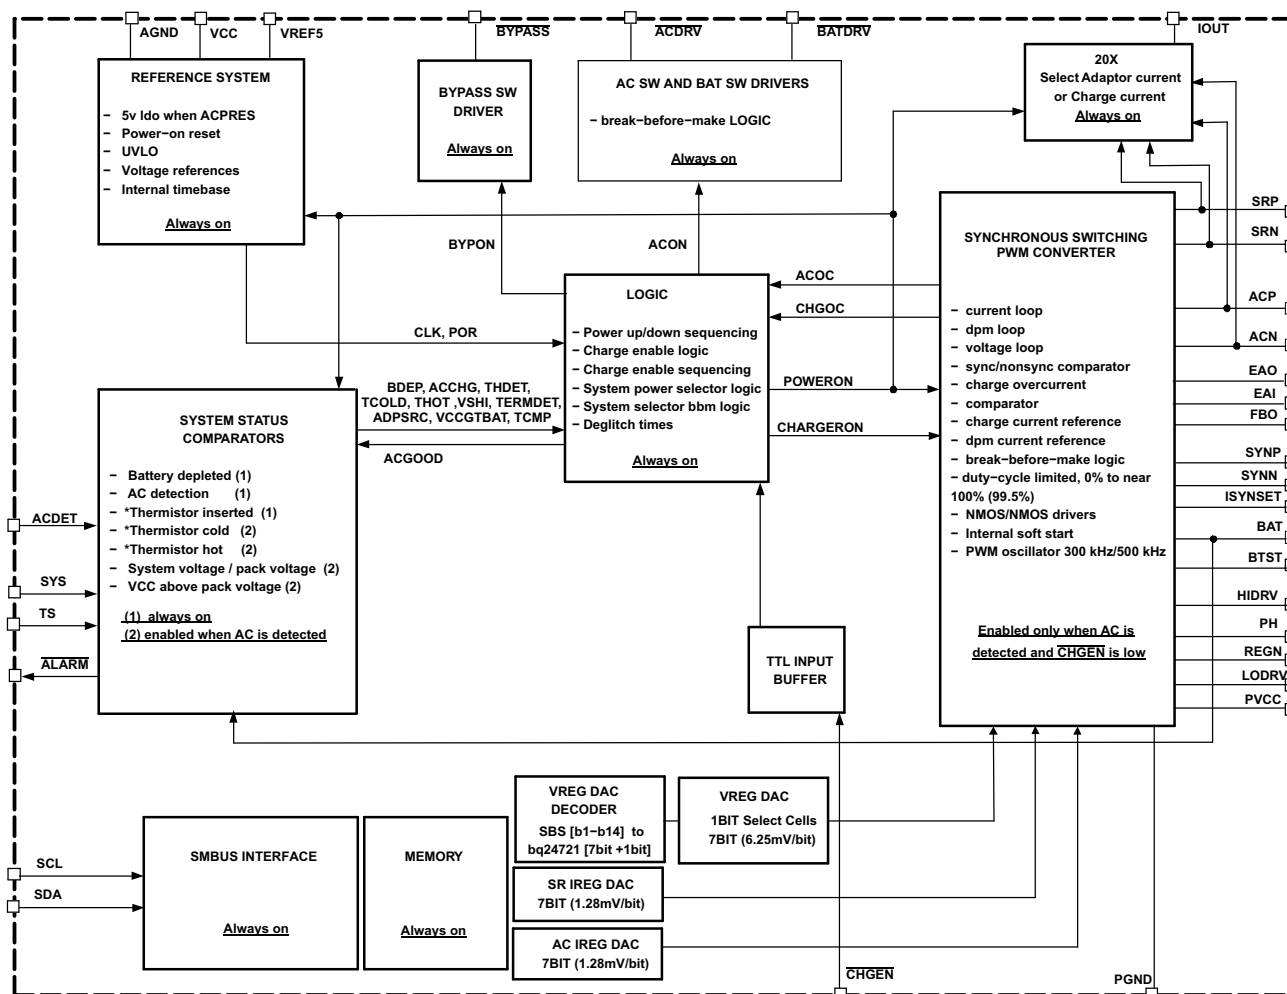


Figure 52. bq24721 SBS-Like SMBus Controlled Simplified Block Diagram

## TYPICAL APPLICATION bq24721

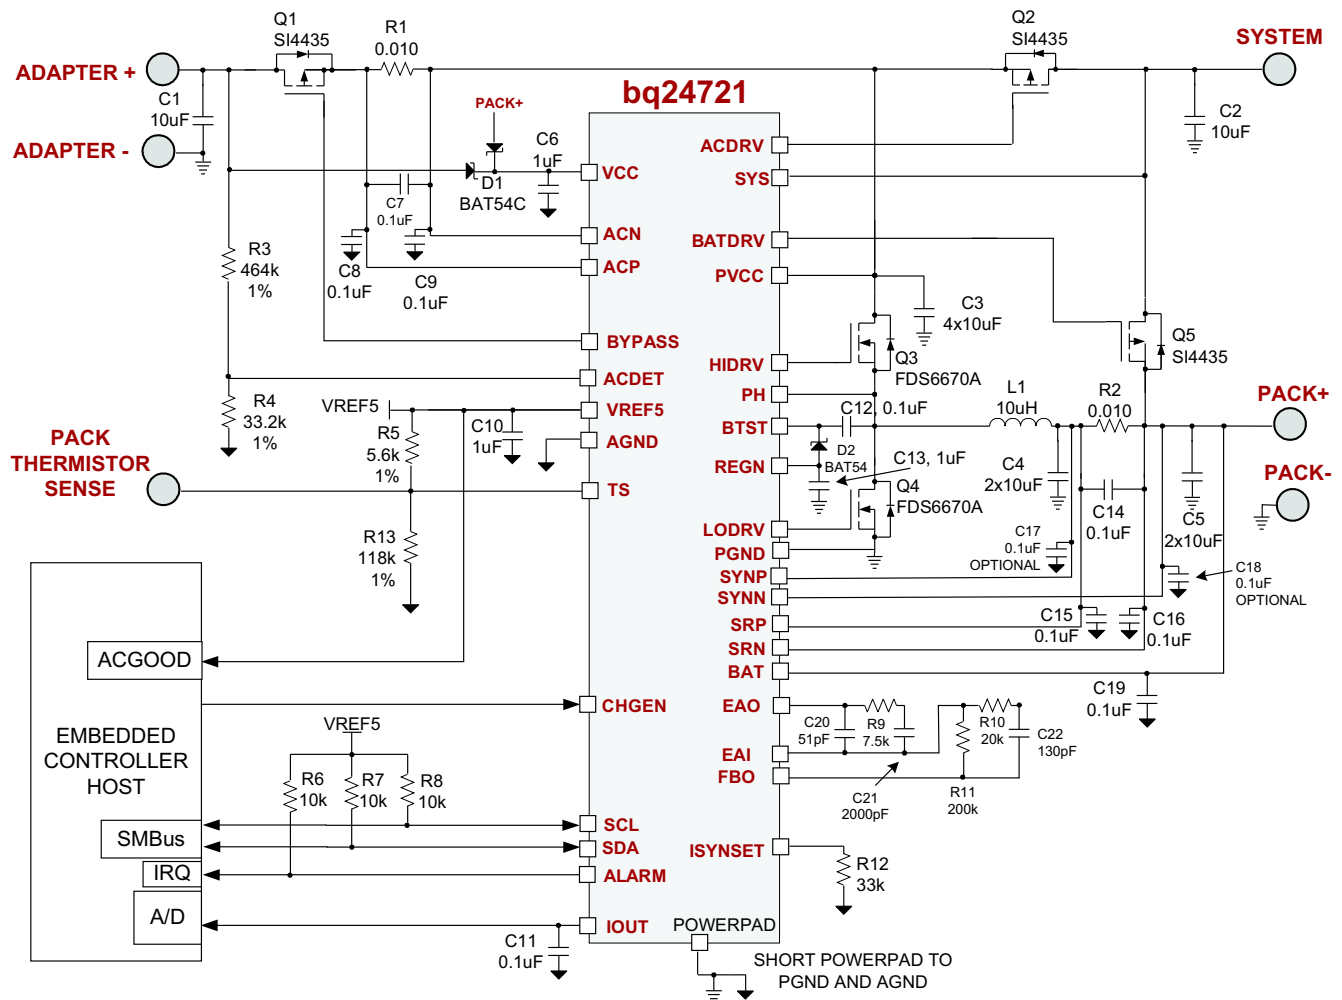

**Figure 53. bq24721 SBS-Like SMBus Host Control With System Power Selector (bq24721 With TS Themistor Sense Input Pin)**

## BOM Key Components (For Figure 53, bq24721 Typical Application Circuit)


| Reference Designator  | Qty | Description <sup>(1)</sup>  |
|---|-----|---|
| Q3  | 1   | N-channel MOSFET, 30V, 12.5A, SO-8, FDS6680A                            |
| Q4  | 1   | N-channel MOSFET, 30V, 13A, SO-8, FDS6670A                              |
| Q1, Q2, Q5  | 3   | P-channel MOSFET, -30V,-6A, SO-8, Vishay-Siliconix, Si4435              |
| D1  | 1   | Diode, Dual Schottky, 30V, 200mA, SOT23, Fairchild, BAT54C              |
| D2  | 1   | Diode, Single Schottky, 30V, 200mA, SOT23, Fairchild, BAT54             |
| L1  | 1   | Inductor, 10μH, 7A, 31mΩ, Vishay-Dale, IHLP5050FD-01                    |
| R1, R2  | 2   | Sense Resistor, 10 mΩ, 1%, 1W, 2010, Vishay-Dale, WSL2010R0100F         |
| C1, C2, C3, C4, C5  | 10  | Capacitor, Ceramic, 10μF, 35V, 20%, X5R, 1206, Panasonic, ECJ-3YB1E106M |
| C6, C10, C13  | 3   | Capacitor, Ceramic, 1μF, 25V, 10%, X7R, 2012, TDK, C2012X7R1E105K       |
| C7, C8, C9, C12, C14, C15, C16, C19, (C17 and C18 optional) | 10  | Capacitor, Ceramic, 0.1μF, 50V, 10%, X7R, 0805, Kemet, C0805C104K5RACTU |
| C20   | 1   | Capacitor, Ceramic, 51pF, 50V, 5%, NPO, 0603                            |

(1) The manufacturer's part number are used for test purposes only.


**BOM Key Components (For Figure 53, bq24721 Typical Application Circuit) (continued)**

| Reference Designator | Qty | Description <sup>(1)</sup>                       |
|----------------------|-----|--|
| C21                  | 1   | Capacitor, Ceramic, 2000pF, 50V, 5%, X7R, 0805   |
| C22                  | 1   | Capacitor, Ceramic, 130pF, 50V, 5%, NPO, 0603    |
| R3                   | 1   | Resistor, Chip, 464k $\Omega$ , 1/16W, 1%, 0402  |
| R4                   | 1   | Resistor, Chip, 33.2k $\Omega$ , 1/16W, 1%, 0402 |
| R12                  | 1   | Resistor, Chip, 33k $\Omega$ , 1/16W, 5%, 0402   |
| R9                   | 1   | Resistor, Chip, 7.54k $\Omega$ , 1/16W, 1%, 0402 |
| R10                  | 1   | Resistor, Chip, 20k $\Omega$ , 1/16W, 1%, 0402   |
| R11                  | 1   | Resistor, Chip, 200k $\Omega$ , 1/16W, 1%, 0402  |
| R6, R7, R8           | 3   | Resistor, Chip, 10k $\Omega$ , 1/16W, 5%, 0402   |
| R5                   | 1   | Resistor, Chip, 10k $\Omega$ , 1/16W, 5%, 0402   |
| R5                   | 1   | Resistor, Chip, 5.6k $\Omega$ , 1/16W, 1%, 0402  |
| R13                  | 1   | Resistor, Chip, 118k $\Omega$ , 1/16W, 1%, 0402  |


**Typical bq24721 Narrow VDC (NVDC) Application (2 sense resistors)**

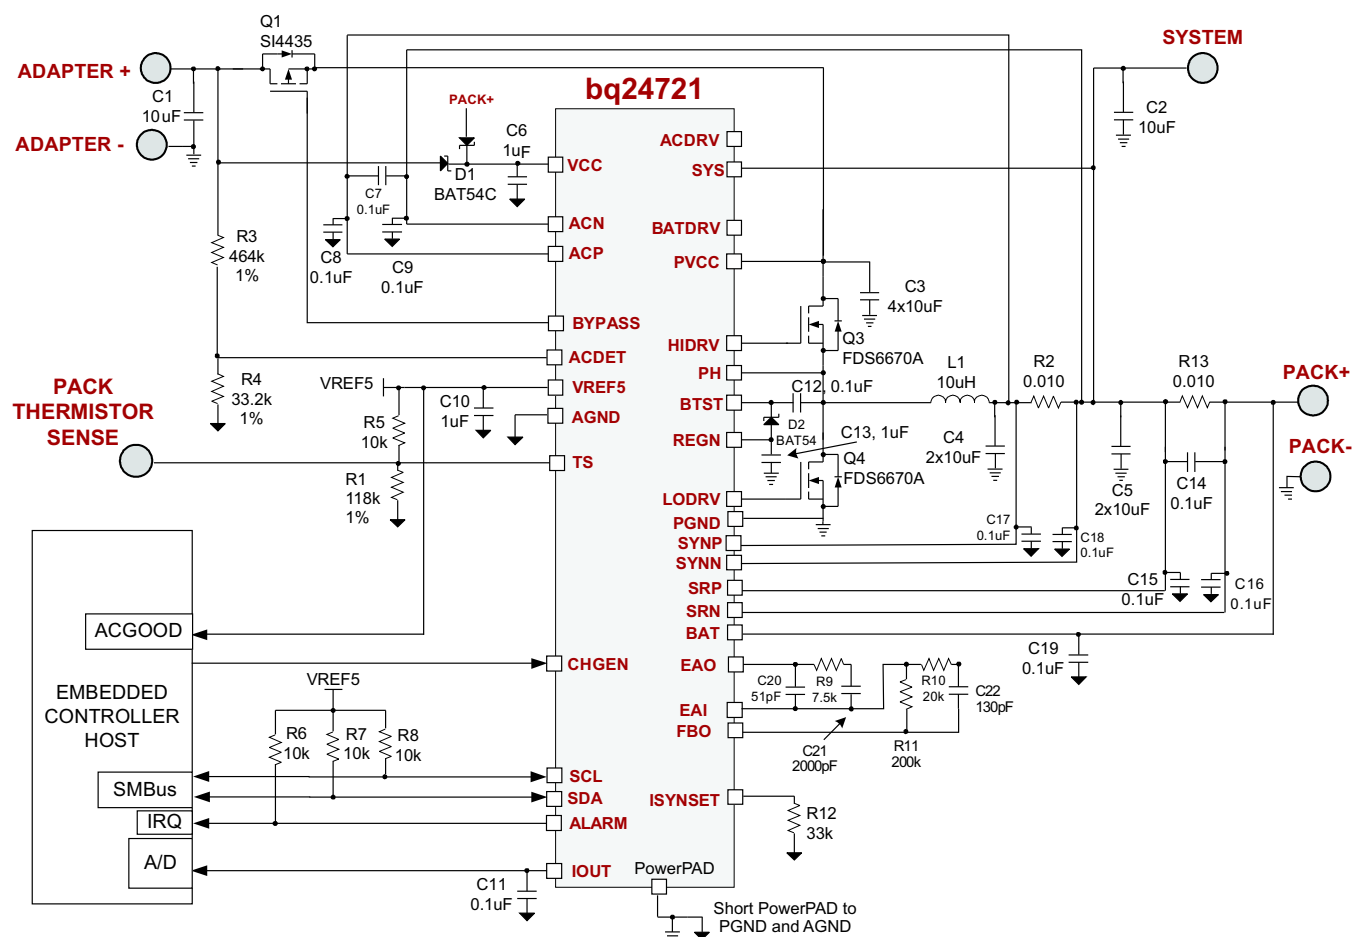

**Figure 54. bq24721 SBS-Like SMBus Host Control, NVDC (no system power selector) With 2 Sense Resistors. ACP and ACN Regulating Converter Current Instead of Input Current**

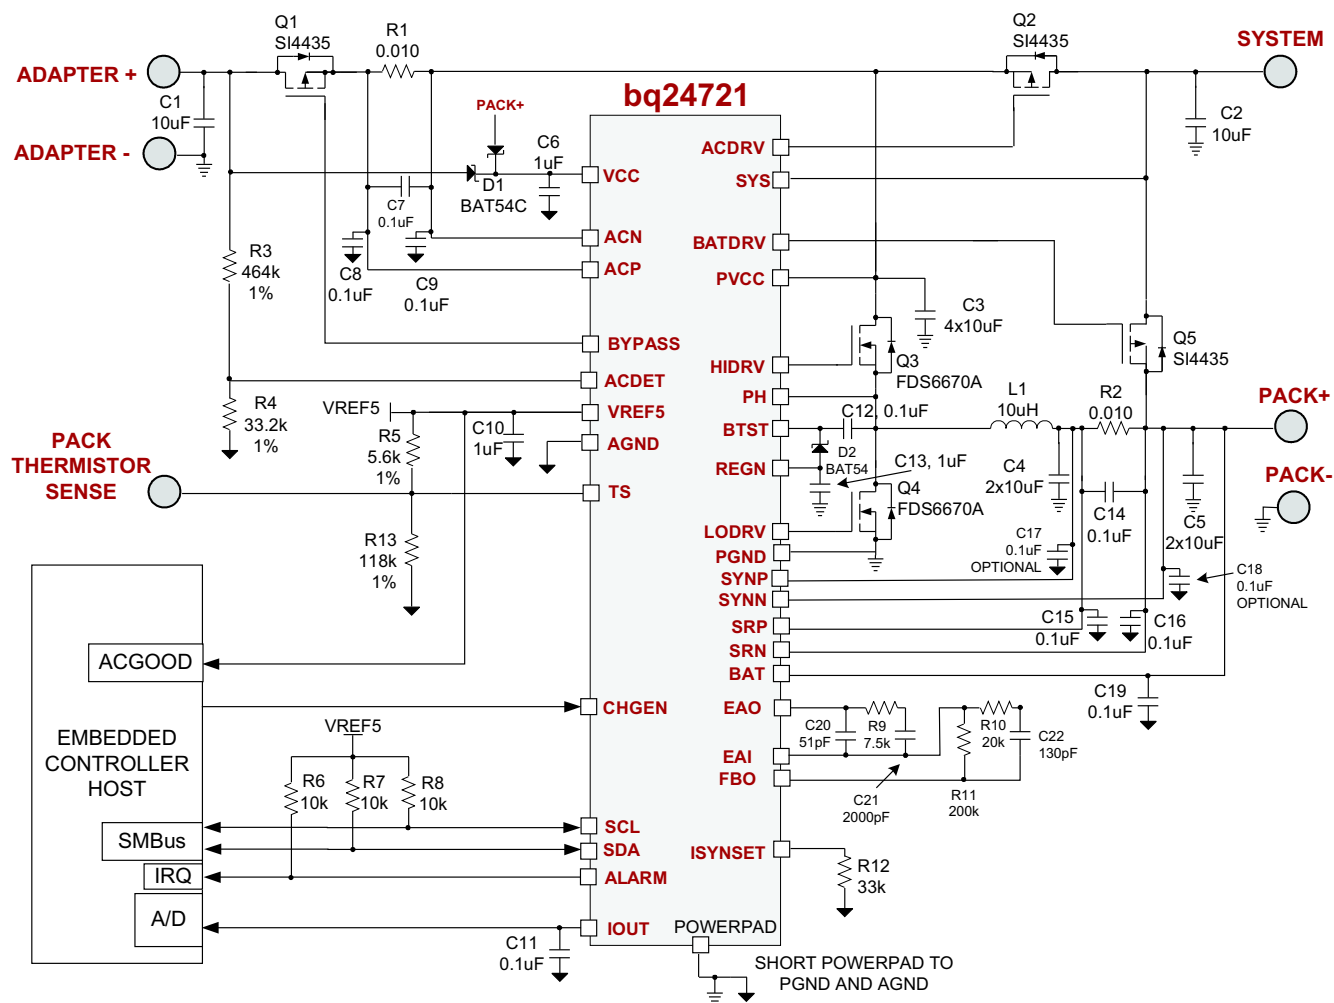**Typical bq24721 Narrow VDC (NVDC) Application (3 sense resistors)**


**Figure 55. bq24721 SBS-Like SMBus Host Control, NVDC (no system power selector)  
With 3 Sense Resistors**

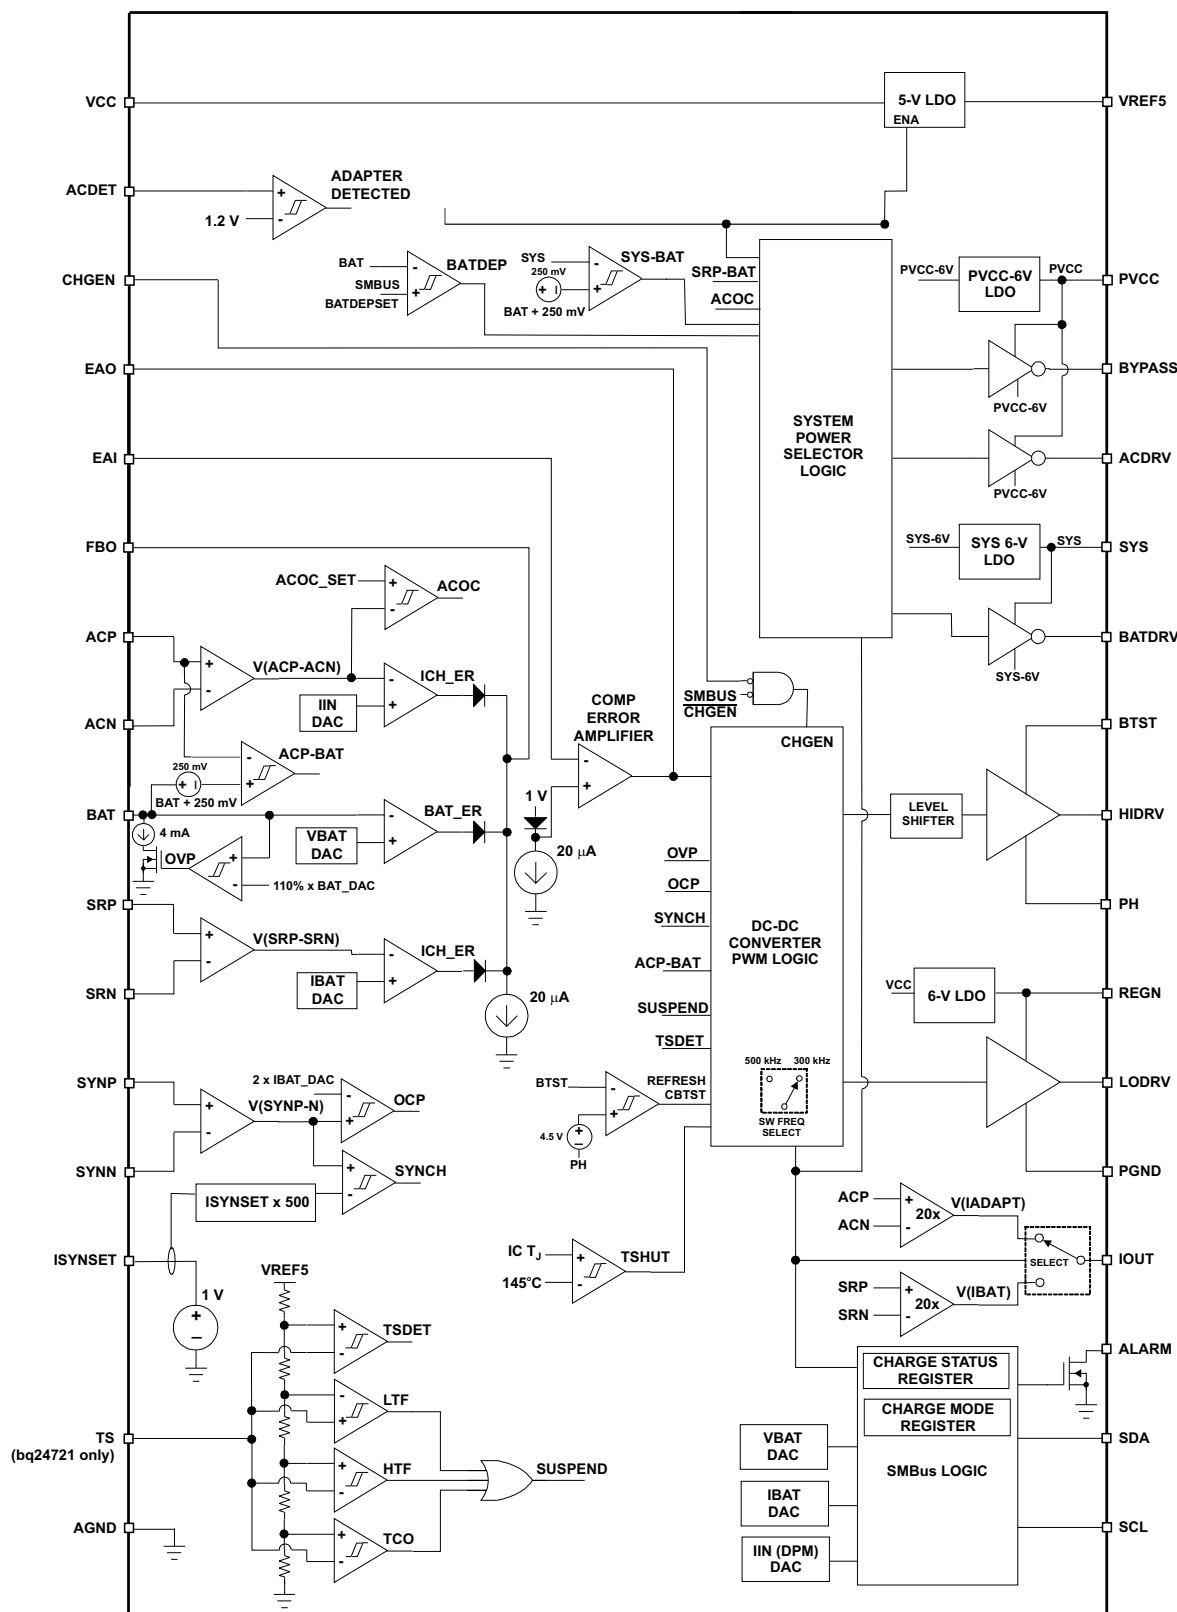

### Figure 56. bq24721 Functional Block Diagram

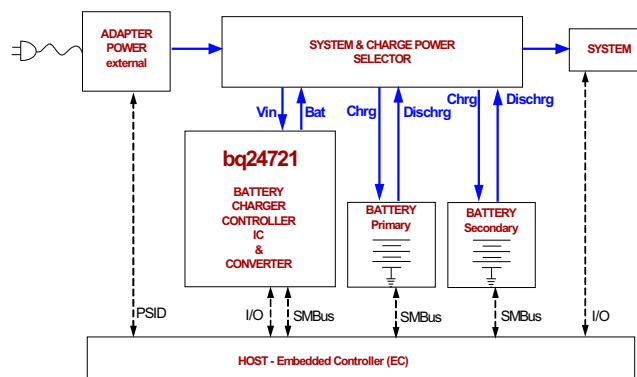


Figure 57. Host Controller

## BLOCK DESCRIPTION

### Detail Block Diagram

The bq24721 charge controller can be used to charge Li-ion, NiMH, or NiCd batteries. The high efficiency synchronous buck controller uses n-channel power MOSFETs for both the high-side control device and the low-side synchronous device. The controller offers high regulation accuracy of the charge current, battery voltage, and input current limits. The low offset of the current loops allow using sense resistors with low-value, such as 10 mΩ.

An embedded controller host programs the battery voltage, charge current, and input current regulation limit thresholds through an SMBus interface using SBS-like DAC registers. The embedded host can control the operation of the charger through a Charge Control (0x12) register, and monitor the status of the charger through a Charger Status (0x13) register.

The voltage loop regulates the battery voltage to the programmed value, and prevents the voltage from exceeding that value when the battery is connected. The charge current loop regulates the battery charge current to the programmed value, and prevents the charge current from exceeding that value. Through the use of dynamic power management (DPM), the input current loop regulates the battery charge current to the programmed value, and prevents the input current from exceeding that value. The three regulation loops operate independently, yet only require a single loop compensation network.

The system power selector function selects the appropriate power source for the system load. If the adapter is detected, then the adapter is connected to the system load. When the adapter is removed, the battery is selected to power the system load. A battery learn cycle can be performed when the adapter is present by setting the CONTROL(0x12) register into Learn Mode via SMBus by the embedded host. This disconnects the adapter from the system; and instead, connect the battery to the system. This is typically done for Ni-based batteries.

### SMBus Interface

The bq24721 uses all the SMBus communications protocol, except for packet error correction (PEC). The charger IC address is (0x12), although it is not 100% SBS compliant. In most applications the extra functionality provided by the differing SBS-Like interface enhances the control of the charger application, while simplifying the interface block, using only the pertinent functions. Five 16-bit registers are used to interface between the embedded host and the charge control IC. The Charging Voltage (0x15) register is used to set the battery regulation voltage. The Charging Current (0x14) register is used to set the battery charge regulation current. The Input Current (0x3F) register is used to set the input regulation current. The Charger Mode (0x12) control register is used to set the charger operating modes. Finally, the Charger Status (0x13) register is used to monitor the operating status of the charger.

| ADDRESS | REGISTER         | DESCRIPTION  |
|---------|------------------|--|
| 0x15    | Charging voltage | Used to set the battery regulation voltage.        |
| 0x14    | Charging current | Used to set the battery charge regulation current. |
| 0x3F    | Input current    | Used to set the input regulation current.          |



## BLOCK DESCRIPTION (continued)

| ADDRESS | REGISTER       | DESCRIPTION  |
|---------|----------------|--|
| 0x12    | Charger mode   | Used to set the charger operating modes.             |
| 0x13    | Charger status | Used to monitor the operating status of the charger. |

The SMBus communications requires only two pins besides the analog ground pin—through the SDA (data) and SCL (clock) pins. The open-drain SCL and SDA pins require pull-up resistors on the board pulling up to the host digital output voltage rail. The pins can be pulled up to any rail between 3 V to 5 V.

An alarm is sent to the host through the ALARM open drain pin. This can be used to trigger an interrupt request (IRQ). A low on the ALARM pin indicates there was a change on the Charger Status (0x13) register. The ALARM pin stays low until the host reads the Charger Status (0x13) register, then the ALARM pin clears and returns to the HI state. The open-drain ALARM pin requires a pull-up resistor that pulls up to the host digital input voltage rail. The pin can be pulled up to any rail between 3 V to 5 V. The charge controller continues to operate whether the host chooses to read or not to read the Charger Status (0x13) register. There is no communications watchdog timer, so there is no need to continuously poll the Charger Status (0x13) register or have to continuously reprogram any of the other registers.

### Setting Charge Voltage (VBAT DAC register)

The charge voltage can be programmed by setting Charging Voltage(0x15) register. The SBS specification asks for 16 bits to set the regulation voltage with a 1-mV LSB—giving a maximum possible voltage of 65.535 V. The bq24721 uses bits 1 through 14 only, and maps them into the closest value of an internal 7-bit DAC on a per cell basis using a 6.25-mV per cell LSB for three ranges: 9-V pre-charge voltage; 3 cells Li+ battery pack range; or 4 cells Li+ battery pack range. The 3 cell portion has an LSB of 18.75 mV and a range from 12 V-14.4 V; while the 4 cell portion has an LSB of 25 mV and a range from 16 V-19.2 V. Intermediate programmed voltages between the internal 7-bit DAC values are truncated to the lower value to avoid an overvoltage on the battery. Programmed voltages above 19.2 V are automatically set to the maximum 19.2-V limit. The charger is disabled for programmed voltages below 12 V (except for 9 V), and for programmed voltages between 14.4 V – 16 V. This triggers a voltage-out-of-range condition and the VOR bit of the Charger Status (0x13) register is set, and an alarm (ALARM pin pulled low) is sent to the host. The default power-up-reset voltage value is 0 V, charger disabled.

### Setting Charge Current (IBAT DAC register)

The charge current can be programmed using the Charging Current (0x14) register. The SBS specification asks for 16 bits to set the charge current with a 1-mA LSB—giving a maximum possible current of 65.535 A using a 10-mΩ sense resistor. The bq24721 uses bits 7 – 14 only to limit the range within a practical operating range. The current range is 0 mA to 16.384 A with an LSB of 128 mA using a 10-mΩ sense resistor. The charger is disabled when the programmed input current is 0 A. The default power-up-reset current value is 0 A, charger disabled. Other sense resistors could be used to set the charge current—the user would just need to transform the DAC current table values to the new current values by dividing the current by 10 mΩ, then multiplying by the new sense resistor value used.

### Setting Input (DPM) Current (IDPM DAC register)

The input current can be similarly programmed using the Input Current (0x3F) register. The SBS specification asks for 16 bits to set the input current with a 1-mA LSB—giving a maximum possible current of 65.535 A using a 10-mΩ sense resistor. The bq24721 uses bits 7 – 14 only to limit the range within a practical operating range. The current range is 0 mA to 16.384 A with an LSB of 128 mA using a 10-mΩ sense resistor. The charger is disabled when the programmed input current is 0 A. The default power-up-reset current value is 0 A, charger disabled. Other sense resistors could be used to set the input current—the user would just need to transform the DAC current table values to the new current values by dividing the current by 10 mΩ, then multiplying by the new sense resistor value used.

## Power Up

When the adapter is not detected, the REGN output voltage is 4.6 V and the VREF5 LDO regulator is off, to lower the power consumption from the battery. The VREF5 LDO is pulled-down to AGND when the adapter is not detected. The REGN LDO regulator begins to regulate at 4.6 V when the input VCC voltage is greater than 6 V. The REGN output voltage is then 6 V when the adapter is detected, and the VCC is greater than 7 V. If adapter is detected, but VCC is less than 7 V, then the REGN is in dropout, and REGN output voltage depends on the VCC voltage and REGN load current. The VREF5 LDO is allowed to turn-on and regulate to 5 V, 5 ms after REGN is 6 V and the adapter is detected. There is a 500-ms delay from the time the adapter is detected, until the ACFET from the system power selector is allowed to turn-on, and until the charger is allowed to turn-on. The battery continues to be connected to the system during this 500-ms delay.

## Adapter Detect

The adapter detect threshold is programmed by an external voltage divider resistor from the adapter to the ACDET pin. The internal ACDET comparator has a 1.2-V rising-edge threshold and a 15-mV falling-edge hysteresis. The adapter detect value should typically be programmed to a value greater than the maximum battery voltage, and lower than the minimum allowed adapter voltage. The ACDETECT divider should be placed before the BYPASS FET in order to sense the true adapter input voltage whether the BYPASS is on or off.

The VREF5 LDO output can also be used to indicate when the adapter is detected, for both the bq24721 and the bq24721, since the VREF5 LDO only comes up when the adapter is detected.

## System Power Selector

The bq24721 can automatically switch between adapter power or battery power to the system load. The battery is connected to the system when there is no adapter detected. The adapter is connected to the system when the adapter is detected. An automatic break-before-make logic prevents shoot-through currents when the selector switches.

When no adapter is detected the ACDRV pin is pulled to the PVCC pin to keep the external ACFET p-channel power MOSFET off, disconnecting the adapter from system. The break-before-make logic waits until the ACFET is off and the System to battery voltage comparator indicates the system voltage is within 250 mV of the Battery (SYS voltage falling-edge, with a 50-mV hysteresis SYS voltage rising-edge). This prevents shoot-through currents or large discharge currents from going into the battery. The BATDRV pin is then set to the SYS pin voltage minus 6 V by an internal regulator in order to turn on the external BATFET p-channel power MOSFET, connecting the battery pack to the system.

When adapter is detected there is a 500-ms delay; then, the BATDRV is set to the SYS pin voltage to turn off the external BATFET p-channel power MOSFET, in order to disconnect the battery. The break-before-make logic waits until the BATFET is off to prevent shoot-through currents. The ACDRV pin is then set to the PVCC pin voltage minus 6 V by an internal regulator in order to turn on the external ACFET p-channel power MOSFET, connecting the adapter to the system.

The host can override the adapter to system connection when adapter is present, by setting the charger into Learn Mode. The host can then induce a learn cycle in which the battery is allowed to discharge. A learn cycle is used to recalibrate the fuel gauge for Ni-based batteries, or for clearing the memory effect of a Ni-cd battery. After discharging the battery, Learn Mode can be disabled allowing the adapter to be reconnected to the system, then resuming a normal charge cycle.

Whenever the battery is connected to the system (whether in learn cycle with adapter present, or no adapter present), there is a Low Battery comparator that monitors the battery voltage, and alerts the host and charge controller that the battery has been depleted. The BAT\_DEP threshold can be programmed through the Charger Mode control (0x12) register through bits b9-b11. The three bits can program the threshold between 2.2-V per cell to 2.9-V per cell, in 100-mV increments. The number of cells is determined by the programmed battery regulation voltage (0x15) register. If the battery voltage falls below the BAT\_DEP threshold, then the battery is disconnected from the system and the adapter is connected to the system. The Battery Voltage Low bit (b11) is set in the Charger Status (0x13) register, and the ALARM pin is pulled low to alert the host. There is a 1 second deglitch time to prevent false triggering.

The Charger Status (0x13) register bits b6 and b7 also always indicate whether the battery is connected to the system (b6), or the adapter is connected to the system (b7). An alarm is triggered whenever these states change.

Asymmetrical gate drives (100  $\Omega$  turn-off; 10 k $\Omega$  turn-on) for the ACDRV and BATDRV drivers provide fast turn-off and slow turn-on of the ACFET and BATFET to help the break-before-make logic and to allow a soft-start at turn-on of either FET. The soft-start time can be further increased by putting a capacitor from gate to source of the p-channel power MOSFETs.

### Input Overcurrent Protection (ACOC)

For solutions using the selector functions, an input overcurrent protection function (ACOC) is provided which disconnects the ACFET by turning off the ACDRV pin, whenever the sensed input current exceeds the programmed ACOC threshold. The ACOC threshold is programmed through the SMBus Charge Mode (0x12) control register, bits b6, b7, b8. The ACOC function is automatically disabled upon power-on-reset. The host needs to enable it by setting the ACOC bit (b6) HI. The ACOC threshold is set by the SET\_ACOC bits (b7, b8), to thresholds of 130%, 150%, 170%, or 190% of the input current (DPM) regulation limit threshold from the Input Current (0x3F) register.

The ACFET turns off when the sensed current exceeds the threshold after a 200- $\mu$ s deglitch time. The ACFET automatically turns on after 2 ms, to limit the on-time duty cycle, and limit the power dissipation on the ACFET. Care must be taken to ensure system load power does not exceed the power-up allowable power when the ACOC function is used.

The function is not intended for system short-circuits, as usually the adapter self protects. Instead, the function is intended for long-term overcurrent protection of the selector power devices, and to limit start-up peak current.

### Bypass FET

The BYPASS pin is used to control an input FET that is off to prevent reverse discharge from the battery to the adapter, and is on during input current draw to the system or battery, to minimize the power dissipation, as compared to using a Schottky diode. If no adapter is detected, the BYPASS FET is off, by setting the BYPASS pin to the PVCC pin. When the adapter is detected there is a 500-ms delay, then an ACP-to-BAT voltage comparator is used to control the BYPASS pin. The BYPASS driver is set to the PVCC pin voltage when the adapter voltage (ACP pin) is not more than 250 mV (ACP voltage falling-edge) above the battery voltage (BAT pin), in order to turn off the external BYPASS p-channel power MOSFET. There is a 50 mV (ACP voltage rising-edge) hysteresis, to protect from noise and prevent chatter. When adapter is detected and the ACP pin voltage is greater than 300 mV above the BAT pin voltage, the BYPASS pin voltage is set to PVCC pin voltage minus 6 V, in order to turn on the external BYPASS p-channel power MOSFET.

The ACP-to-BAT comparator also prevents the battery voltage from holding-up the ACDET sensed value and falsely detecting ACDET when the adapter is removed, this prevents the system power selector from *getting stuck* in an *adapter always detected* state. When ACP gets near to BAT, the external BYPASS p-channel power MOSFET is turned off. This isolates the ACDET network from the battery, and allows the adapter input node to discharge to PGND.

The BYPASS driver has a symmetrical gate drive of 1 k $\Omega$  turn-on and turn-off and does not need to be slowed down.

### Enabling Charge

Charge can only be enabled 500 ms after adapter is detected. To initiate charge the  $\overline{\text{CHGEN}}$  pin must be low, and the Charger Mode (0x12) register END CHARGE bit (b0) must be set LO. The power-on-reset default for the END CHARGE bit is HI, disabling charge.

The Charger Status (0x13) register NOT READY TO CHARGE bit (b0) indicates whether the charger is ready to charge. A HI indicates the charger is not ready to charge, while a LO indicates the charger is ready to charge. The NOT READY TO CHARGE bit (b0) must be LO in order for the charger to be enabled. The conditions that make the charger not ready to charge are: adapter not detected, 500-ms delay after adapter detected not over, REGN voltage not up, or VREF5 voltage not up.

The Charger Status (0x13) register CHARGER NOT ON bit (b1) indicates whether the charger is not on (HI), or the charger is on (LO). For charger to be on, the  $\overline{\text{CHGEN}}$  pin must be low, the Charger Mode (0x13) register END CHARGE bit (b0) must be LO, the IC junction temperature must be below the TSHUT threshold, overcurrent detected, or Thermistor Sense (TS) indicates battery pack is out of programmed permissible charge temperature range (bq24721 only).

## Converter Operation

The synchronous buck PWM converter uses a fixed frequency voltage mode with feed-forward control scheme. A type III compensation network allows using ceramic output capacitors. The compensation input stage is connected between the feedback output (FBO) pin and the error amplifier input (EAI) pin. The feedback compensation stage is connected between the error amplifier input (EAI) pin and error amplifier output (EAO) pin.

An internal saw-tooth ramp is compared to the EAO pin error control signal to vary the duty-cycle of the converter. The ramp height is one-tenth of the input adapter voltage making it always directly proportional to the input adapter voltage. This cancels out any loop gain variation due to a change in input voltage, and simplifies the loop compensation. The ramp is offset by 300 mV in order to allow zero percent duty-cycle, when the EAO signal is below the ramp. The EAO signal is also allowed to exceed the saw-tooth ramp signal in order to get a 100% duty-cycle PWM request. Internal gate drive logic allows achieving 99.98% duty-cycle while ensuring the N-channel upper device always has enough voltage to stay fully on. If the BTST pin to PH pin voltage falls below 4.5 V for more than 3 cycles, then the high-set n-channel power MOSFET is turned off and the low-side n-channel power MOSFET is turned on to pull the PH node down and recharge the BTST capacitor. Then the high-side driver returns to 100% duty-cycle operation until the voltage is detected to fall low again due to leakage current discharging the BTST capacitor below the 4.5 V, and the reset pulse is reissued.

The fixed frequency oscillator keeps tight control of the switching frequency under all conditions of input voltage, battery voltage, charge current, and temperature, simplifying output filter design and keeping it out of the audible noise region. The switching frequency can be changed from 300 kHz to 500 kHz by the Charger Mode (0x12) register PWM FS bit (b5) – a HI is 500 kHz, a LO is 300 kHz. The switching frequency is 300 kHz by default after power-on-reset. Typical chargers use 300 kHz, but 500 kHz allows a smaller inductance value

The charge current sense resistor should be placed with at least half or more of the total output capacitance placed before the sense resistor contacting both sense resistor and the output inductor; and the other half or remaining capacitance placed after the sense resistor. The output capacitance should be divided and placed onto both sides of the charge current sense resistor. A ratio of 50:50 percent gives the best performance; but the node in which the output inductor and sense resistor connect should have a minimum of 50% of the total capacitance. This capacitance provides sufficient filtering to remove the switching noise and give better sense accuracy. The type III compensation is already providing phase boost near the cross-over frequency, giving sufficient phase margin.

## ISYNSET

The ISYNSET pin is used to program the charge current threshold at which the charger changes from non-synchronous operation into synchronous operation. This is important to prevent negative inductor current. Negative inductor current may cause a *boost* effect in which the input voltage increases as power is transferred from the battery to the input capacitors—this can lead to an overvoltage on the PVCC node and potentially cause some damage to the system.

This programmable value allows setting the current threshold for any inductor current ripple, and avoiding negative inductor current. The SYNPN and SYNPN pins are used to sense across the charge current sense resistor.

To program the threshold, a resistor is connected from the ISYNSET pin to AGND. The minimum synchronous threshold should be set from the inductor current ripple to the full ripple current, where the inductor current ripple is given by.

$$\frac{I_{(RIPPLE\_MAX)}}{2} = I_{(SYN)} + I_{(RIPPLE\_MAX)} \quad (1)$$

where

$$R_{(RIPPLE\_MAX)} = \frac{V_{(IN\_MAX)} - V_{(BAT\_MIN)} \times \frac{V_{(BAT\_MIN)}}{V_{(IN\_MAX)}} \times \frac{1}{S}}{L_{(MIN)}} \quad (2)$$

$V_{(IN\_MAX)}$  is the maximum adapter voltage,  $V_{(BAT\_MIN)}$  is the minimum battery voltage,  $f_s$  is the switching frequency, and  $L_{MIN}$  is the minimum output inductor value.

The ISYNSET pin is internally regulated to 1 V. When the  $R_{(\text{SYNSET})}$  resistor is connected to AGND, it sets an ISYNSET current equal to  $1 \text{ V}/R_{(\text{SYNSET})}$ . The ISYNSET current internally flows through a  $500 \Omega$  creating a voltage at which the voltage across  $R_{(\text{SENSE})}$  is compared. The ISYN charge current threshold is the voltage divided by the  $R_{(\text{SENSE})}$  sense resistor value. The  $R_{(\text{SYNSET})}$  resistor value is calculated by:

$$R_{(\text{SYNSET})} = \frac{1 \text{ V} \times 500}{I_{(\text{SYN})} \times R_{(\text{SENSE})}} \quad (3)$$

where ISYN is the charge current threshold at which the converter changes to synchronous operation.

### **Synchronous versus Nonsynchronous Operation**

The charger operates in non-synchronous mode when the sensed charge current is below the ISYNSET programmed value. When above the ISYNSET programmed value, the charger operates in synchronous mode.

During synchronous mode, the low-side n-channel power MOSFET is on, when the high-side n-channel power MOSFET is off. The internal gate drive logic ensures there is break-before-make switching to prevent shoot-through currents. During the dead-time where both FETs are off, the back-diode of the low-side power MOSFET conducts the inductor current. Having the low-side FET turn-on keeps the power dissipation low, and allows safely charging at high currents. During Synchronous mode the inductor current is always flowing and operates in Continuous Conduction Mode (CCM) creating a fixed two-pole system. During non-synchronous operation: after the high-side n-channel power MOSFET turns off, and after the break-before-make dead-time, the low-side n-channel power MOSFET turns on for around 80 ns, then the low-side power MOSFET turns off and stays off until the beginning of the next cycle, where the high-side power MOSFET is turned on again. The 80 ns low-side MOSFET on-time is done to ensure the bootstrap capacitor is always recharged and able to keep the high-side power MOSFET on during the next cycle. This is important for battery chargers, where unlike regular dc-dc converters, there is a battery load that maintains a voltage and can both source and sink current. The 80 ns low-side pulse pulls the PH node (connection between high and low-side MOSFET) down, allowing the bootstrap capacitor to recharge up to the REGN LDO value. After the 80 ns, the low-side MOSFET is kept off to prevent negative inductor current from occurring. The inductor current is blocked by the off low-side MOSFET, and the inductor current becomes discontinuous. This mode is called Discontinuous Conduction Mode (DCM).

During the DCM mode the loop response automatically changes and has a single pole system at which the pole is proportional to the load current, because the converter does not sink current, and only the load provides a current sink. This means at very low currents the loop response is slower, as there is less sinking current available to discharge the output voltage.

At very low currents during non-synchronous operation, there may be a small amount of negative inductor current during the 80 ns *recharge pulse*. The charge should be low enough to be absorbed by the input capacitance.

Whenever the converter goes into zero percent duty-cycle, the high-side MOSFET does not turn-on, and the low-side MOSFET does not turn-on (no 80 ns recharge pulse), so there is no discharge from the battery.

### **Battery Regulation Loop**

The BAT pin is used to sense the battery voltage and should be connected as close to the battery as possible, or directly on the output capacitor. A 0.1- $\mu\text{F}$  ceramic capacitor from BAT to AGND is recommended added as close the BAT pin as possible to decouple high frequency noise.

### **Charge Current Regulation Loop**

The SRP and SRN pins are used to sense across the sense resistor. The charge current DAC is set for a 10-m $\Omega$  sense resistor; however, resistors of other values can also be used. The larger the sense resistance, the larger the sensed voltage, and the higher the regulation accuracy, but at the expense of higher conduction losses.

### **Input Current Regulation Loop (DPM)**

The ACP and ACN pins are used to sense across the sense resistor. The input current DAC is set for a 10-m $\Omega$  sense resistor; however, resistors of other values can also be used. The larger the sense resistance, the larger the sensed voltage, and the higher the regulation accuracy, but at the expense of higher conduction losses.

### **Automatic Internal Soft-Start Charger Current**

The charger automatically soft-starts the charger regulation current every time the charger is enabled, to ensure there is no overshoot or stress on the output capacitors or the power converter. The soft-start consists of stepping-up the charge regulation current into eight evenly divided steps up to the programmed charge current of register (0x14). Each steps last around 1 ms, for a typical rise time of 8 ms. No external components are needed for this function.

### **High Accuracy IOUT Input and Charge Current Sense Amplifiers (CSA)**

Industry standard, high accuracy current sense amplifiers (CSA) can be used to monitor the input current or the charge current by the host or some discrete logic through the analog voltage output of the IOUT pin. The current sense amplifier from the input current and the current sense amplifier of the charge current (voltage across SRP-SRN pins) amplifies the input sensed voltage by 20x, through the IOUT pin. The IOUT output is selectable between the input current or the charge current, through a multiplexor that is controlled by the Charge Mode (0x12) control register, IOUT Select bit (b3). The default setting is LO selecting the input current CSA. Programming a HI selects the charger current CSA.

The IOUT output is a voltage source 20 times the input differential voltage. If the user wants to lower the voltage, they could use a sense resistor from IOUT to AGND, and still achieve accuracy overtemperature as the resistors can be matched their thermal coefficients.

A 0.1- $\mu$ F capacitor connected on the output is recommended for decoupling high-frequency noise. An additional RC filter is optional if additional filtering is desired. Note that adding filtering also adds additional response delay.

### **Charger Overcurrent Protection**

The charger has a secondary overcurrent protection function that monitors the charge current, and prevents it from exceeding 200% of the programmed charge current. The high-side gate drive turns off and automatically resume when the current falls below the overcurrent threshold

### **Current Regulation Down to Zero Battery Voltage**

The bq24721 charger regulates charge current and input current down to zero volts on the battery BAT voltage. If there is a drop below 2 V, then the converter immediately turns off both high-side and low-side FETs to stop current flow, then resumes regulating the current. This ensures there is no overcurrent surge that could cause damage to the battery, charger, or system.

### **Battery Overvoltage Protection**

As an extra level of protection, the bq24721 has an overvoltage protection function, in which the converter is turned off when the BAT voltage is detected to be above 110% of the programmed battery regulation threshold. During this overvoltage condition, a 4-mA current sink from the BAT pin to AGND pin turns on to reduce the response time to bring down the battery voltage during otherwise no-load conditions such as battery removal or battery disconnect for pulse-charge schemes. This reduces the battery node voltage overshoot and reduce the battery voltage regulation response time, with low or no load conditions.

The converter stays off and the 4-mA current sink remains on until the battery voltage falls below 102% of the programmed battery regulation threshold. Afterward, the converter reenables and continues regulating the BAT voltage as normal.

### **Thermal Shutdown Protection**

The QFN package has low thermal impedance which provides good thermal conduction from the silicon to the ambient, to keep junctions temperatures low. As added level of protection, the charger converter turns off and self-protects whenever the junction temperature exceeds the TSHUT threshold of 145°C. The charger stays off until the junction temperature falls below 130°C.

## BATTERY CHARGE CURRENT

The battery charge current,  $I_{O(CHARGE)}$ , is established by setting the external sense resistor,  $R_{(SRSNS)}$ , and the SMBus Charge current DAC ( $0 \times 14$ ). In order to set the current, first  $R_{(SRSNS)}$  should be chosen based on the regulation threshold  $V_{(IREG)}$ , across this resistor. The listed SBS current corresponds to a 10 mΩ sense resistor.

$$R_{(SRSNS)} = V_{(IREG)} / I_{O(CHARGE)}$$

## CURRENT REGULATION REFERENCE RAMP UP/DOWN REFERENCE

The bq24721 current regulation loop reference steps-up whenever charge is enabled, and when returning from fault/suspend mode into charge where the current regulator is turned on. The loop should take control within a few hundred micro-seconds with very little overshoot due to the LC output filter and the high compensation loop bandwidth with 300 kHz or 500 kHz operating frequency; therefore, the reference could ramp up from precharge to fast-charge within 50 μs to 500 ms. Going into fault/suspend mode, short circuit ( $V_{(BAT)} < V_{(UVT)}$ ), Sleepmode ( $V_{(ACP)} < V_{(BAT)}$ ), or UVLO ( $V_{CC} < 3.7$  V) initiates an immediate shut-off of the high-side PWM FET by setting its gate to  $V_{(PH)}$ . The output inductor and battery load determines the ramp-down rate as it *freewheels* through the Schottky diode.

## BATTERY VOLTAGE REGULATION

The voltage regulation feedback is through the BAT pin. This input is tied directly to the positive side of the battery pack. The bq24721 monitors the battery-pack voltage between the BAT and VSS pins. The regulation voltage is programmed through the SBS-like SMBus interface.

The voltage regulation DAC register input is decoded into an internal 7-bit DAC that programs the voltage on a per-cell basis, then is multiplied by the number of cells. There are a total of 128 voltage steps with a 6.25 mV step, giving a per cell range of [4 V – (4.8 V–6.25 mV)]. There are 128 steps in the 3-cell voltage range of [12 V – (14.4 V–18.75 mV)]. There are 128 steps in the 4-cell voltage range of [16 V – (19.2 V–25 mV)].

Valid voltage values are 9 V, 12 V–14.381 V, and 16 V–19.175 V. The internal voltage DAC allows programming to 9 V which could be used for waking-up or closing the battery pack. A 9 V programmed voltage is interpreted as a 2-cell voltage by the BATDEP and BATSHORT thresholds. Step size for 3-cell battery programming voltage is 18.75 mV. The Charger interprets a 3-cell battery for any voltage between 12 V–14.4 V. Step size for 4-cell battery programming voltage is 25 mV. The charger interprets a 4-cell battery for any voltage programmed between 16 V–19.2 V.

Invalid DAC voltages are indicated by the VOR (voltage out of range) bit of the status register. Voltages below 12 V (except for 9 V) are out of range and keep the converter disabled. Voltages between 14.4 V–16 V (including 14.4 V, but not including 16 V) are out of range and keep the converter disabled. Voltages above 19.2 V (including 19.2 V) are out of range and allow the converter to charge, but the voltage is always set to the maximum allowable voltage of 19.175 V = (19.2 V–25 mV).


## BATTERY SHORT-CIRCUIT OR LOW CONDITION

The number of cells determines the value for the BATDEP threshold and for the BATSHORT threshold, as these values are programmed on a per-cell basis. The programmed regulation voltage determines the number of cells. The battery depleted (BATDEP) threshold is programmed by the control register bits b9-b11. The three bit dac sets the voltage between 2.2 V to 2.9 V per cell at 100 mV increments. The BATSHORT threshold is 1.7 V/Cell falling entering a shorted condition, and 1.9 V/Cell rising leaving shorted condition, and entering normal condition. BATSHORT has a 1 second deglitch on both edge directions to protect from transient conditions, and to allow closing deeply discharge battery packs.

The PWM duty-cycle immediately resets to zero percent when the battery voltage is sensed to drop below 2 V, then the regulation loop allows the duty-cycle to settle in the current regulation value, C. After a 1 second deglitch, the converter regulates battery current to C/8 when the battery voltage falls below 1.7 V/cell. The converter regulates back at C after a 1 second deglitch from the time the battery voltage rises above 1.9 V/cell.

## Charge Termination for Li-Ion or Li-Polymer

The primary termination method for Li-Ion and Li-Polymer is minimum current. Secondary temperature termination methods is also provided for additional safety. The host controls the charge initiation and the termination. A battery pack gas gauge assists the hosts on setting the voltages and determining when to terminate based on the battery pack state of charge.

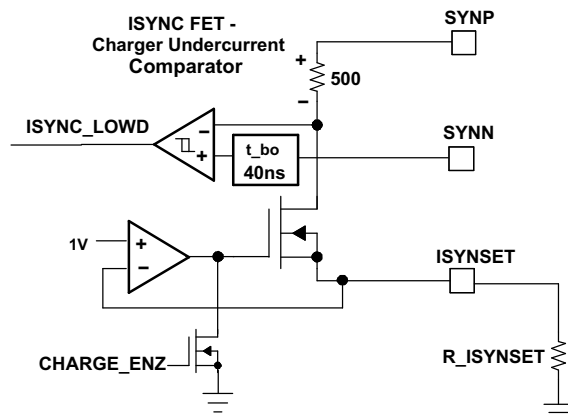


NOTE: Patent Pending

**Figure 58. SRUC Block – Charger Under Current (ISYNC Block – Cycle-by-cycle, prevents negative inductor current)**

## TEMPERATURE QUALIFICATION (TS pin)

The bq24721 continuously monitors battery temperature by measuring the voltage between the TS pin and AGND. A negative temperature coefficient thermistor (NTC) and an external voltage divider typically develop this voltage. The bq24721 compares this voltage against its internal thresholds to determine if charging is allowed. To initiate a charge cycle, the battery temperature must be within the  $V_{(LTF)}$  to  $V_{(HTF)}$  thresholds. If battery temperature is outside of this range, the bq24721 suspends charge and waits until the battery temperature is within the  $V_{(LTF)}$  to  $V_{(HTF)}$  range. During the charge cycle (both precharge and fast charge) the battery temperature must be within the  $V_{(LTF)}$  to  $V_{(TCO)}$  thresholds. If battery temperature is outside of this range, the bq24721 suspends charge and waits until the battery temperature is within the  $V_{(LTF)}$  to  $V_{(HTF)}$  range. The bq24721 suspends charge by turning off the PWM charge FETs. [Figure 59](#) summarizes this operation.

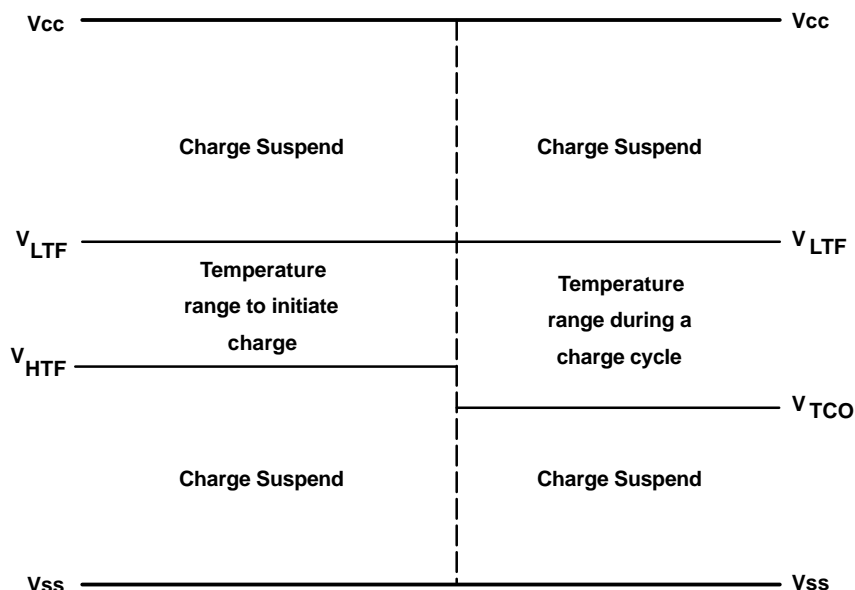

**Figure 59.**



## SBS-Like SMBus

SBS-Like interface is not 100% SBS compliant, as control and status registers were changed to simplify and enhance the charger control device. Address 0x12 is used, but the charger should not be used on systems requiring 100% SBS compliance. Effort was taken to use the same commands when possible. Comparison included on SBS-like vs SBS Spec.

- SBS-Like SMBus
  - SBS 1.1 protocol, slave operation only
  - No CRC
  - Address: 12 (Note SBS-Like is not 100% SBS compliant and has simplified enhancements and
- Smart charger commands implemented
  - ChargingCurrent (), with modifications on data byte contents, *SBS-Like* SMBus
  - ChargingVoltage (), with modifications on data byte contents, *SBS-Like* SMBus
  - ChargerStatus (), with modifications on status bits
- Smart charger commands not implemented
  - ChargerSpecInfo (),
  - AlarmWarning ()

## SBS-Like SMBus: Commands Implemented: Charge Current DAC Register

### Charging Current, (0x14), Write/Read<sup>(1)</sup>

**Table 1.**

| BIT      | SBS SPEC | bq24721 SBS-Like   | NOTES   |
|----------|----------|--------------------|---|
| 0 (LSB)  | 1 mA     | NA                 | Charge current limit setting<br>16384 mA max<br>(162.56 mV max) |
| 1        | 2 mA     | NA                 |   |
| 2        | 4 mA     | NA                 |   |
| 3        | 8 mA     | NA                 |   |
| 4        | 16 mA    | NA                 |   |
| 5        | 32 mA    | NA                 |   |
| 6        | 64 mA    | NA                 |   |
| 7        | 128 mA   | 128 mA (1.28 mV)   |   |
| 8        | 256 mA   | 256 mA (2.56 mV)   |   |
| 9        | 512 mA   | 512 mA (5.12 mV)   |   |
| 10       | 1024 mA  | 1024 mA (10.24 mV) |   |
| 11       | 2048 mA  | 2048 mA (20.48 mV) |   |
| 12       | 4096 mA  | 4096 mA (40.96 mV) |   |
| 13       | 8192 mA  | 8192 mA (81.92 mV) |   |
| 14       | 16384 mA | NA                 |   |
| 15 (MSB) | 32768 mA | NA                 |   |

- (1) Note: Shunt drop voltage shown at LO/HI bit state;  
DAC current value is based on using 10 mΩ sense resistor.  
Max charge current with 10 mΩ sense resistor is 16.256 A.

Bit 13 allows using larger sense resistors for increasing accuracy in low charge current applications.

- Valid charge currents are 0 A–16.256 A using a 10 mΩ sense resistor. Minimum step is 128 mA.
- Programmed charge currents above max 16.256 A → Charger is enabled and the current regulation value is set to the maximum 16.256 A.
- Programmed charge current = 0 A → Charger is disabled.

## SBS-Like SMBus: Commands Implemented: Input Current DAC Register

### Input Current, (0x3F), Write/Read<sup>(1)</sup>

| BIT      | SBS SPEC | bq24721 SBS-Like   | NOTES  |
|----------|----------|--------------------|--|
| 0 (LSB)  | 1 mA     | NA                 | Input DPM current limit setting<br>16384 mA max<br>(162.56 mV max) |
| 1        | 2 mA     | NA                 |  |
| 2        | 4 mA     | NA                 |  |
| 3        | 8 mA     | NA                 |  |
| 4        | 16 mA    | NA                 |  |
| 5        | 32 mA    | NA                 |  |
| 6        | 64 mA    | NA                 |  |
| 7        | 128 mA   | 128 mA (1.28 mV)   |  |
| 8        | 256 mA   | 256 mA (2.56 mV)   |  |
| 9        | 512 mA   | 512 mA (5.12 mV)   |  |
| 10       | 1024 mA  | 1024 mA (10.24 mV) |  |
| 11       | 2048 mA  | 2048 mA (20.48 mV) |  |
| 12       | 4096 mA  | 4096 mA (40.96 mV) |  |
| 13       | 8192 mA  | 8192 mA (81.92 mV) |  |
| 14       | 16384 mA | NA                 |  |
| 15 (MSB) | 32768 mA | NA                 |  |

(1) Note: Shunt drop voltage shown at LO/HI bit state;  
DAC current value is based on using 10 mΩ sense resistor.  
Max input current with 10 mΩ sense resistor is 16.256 A.

Bit 13 allows using larger sense resistors for increasing accuracy in low input current applications.

- Valid input currents are 0 A–16.256 A using a 10 mΩ sense resistor. Minimum step is 128 mA.
- Programmed input currents above max 16.256 A → Charger is enabled and the current regulation value is set to the maximum 16.256 A.
- Programmed input current = 0 A → Charger is disabled.

## SBS-Like SMBus: SBS Translator Voltage DAC Commands Implemented

### Charging Voltage, (0x15), Write/Read

| BIT      | SBS SPEC | bq24721 SBS-Like<br>CHARGE VOLTAGE LOOK-UP TABLE | NOTES  |
|----------|----------|--|--|
| 0 (LSB)  | 1 mV     | NA   | Not used   |
| 1        | 2 mV     | 0 / 2 mV   | See Notes below for valid voltage range and minimum step size (resolution <sup>(1)</sup> ) |
| 2        | 4 mV     | 0 / 4 mV   |  |
| 3        | 8 mV     | 0 / 8 mV   |  |
| 4        | 16 mV    | 0 / 16 mV  |  |
| 5        | 32 mV    | 0 / 32 mV  |  |
| 6        | 64 mV    | 0 / 64 mV  |  |
| 7        | 128 mV   | 0 / 128 mV                                       |  |
| 8        | 256 mV   | 0 / 256 mV                                       |  |
| 9        | 512 mV   | 0 / 512 mV                                       |  |
| 10       | 1024 mV  | 0 / 1024 mV                                      |  |
| 11       | 2048 mV  | 0 / 2048 mV                                      |  |
| 12       | 4096 mV  | 0 / 4096 mV                                      |  |
| 13       | 8192 mV  | 0 / 8192 mV                                      |  |
| 14       | 16384 mV | 0 / 16384 mV                                     |  |
| 15 (MSB) | 32768 mV | NA   | Not used   |

- (1) Note: Battery voltage range: 4 V–4.8 V per cell  
 3 Cell range: 12 V to (12 V–14.4 V); step size = 18.75 mV  
 4 Cell range: 16 V to (16 V–19.2 V); step size = 25 mV  
 a. Valid voltages are 9 V, 12 V–14.4 V, and 16 V–19.2 V. Intermediate programmed voltages between Internal DAC values are truncated to the lower value to avoid overvoltage on battery.  
 b. Programmed Voltages above max 19.2 V → Charger is enabled and the voltage regulation value is set to the maximum 19.2 V.  
 c. Programmed voltages below 12 V (except 9 V), and between 14.4 V–16 V → Charger is disabled, VOR bit is triggered, and an alarm is sent to the host.  
 d. Programmed 9 V (9000 mV = 2328 Hex) → Charger regulates to 9 V output for battery wakeup.

### SBS-Like SMBus: IC Internal Voltage DAC for Reference Only

Internal decoder translates the SBS voltage register value into the internal closest value. Values are truncated to the lower valid setting.

### Charging Voltage, IC Internal Only

| BIT     | bq24721 SBS-Like<br>CHARGE VOLTAGE INTERNAL<br>DECODER DAC |            | NOTES  |
|---------|--|------------|--|
| 0 (LSB) | 0/18.75 mV   | 0/25 mV    | Offset that can be added to <i>dc</i> level<br>See the following notes for valid voltage range and minimum step size (resolution) <sup>(1)</sup> |
| 1       | 0 / 37.5 mV  | 0 / 50 mV  |  |
| 2       | 0 / 75 mV  | 0 / 100 mV |  |
| 3       | 0 / 150 mV   | 0 / 200 mV |  |
| 4       | 0 / 300 mV   | 0 / 400 mV |  |
| 5       | 0 / 600 mV   | 0 / 800 mV |  |
| 6 (MSB) | 0 / 1.2 V  | 0 / 1.6 V  | 3 Cell or 4 Cell <i>dc</i> level select  |
|         | LO – 12 V  | HI – 16 V  |  |

- (1) Note: Battery voltage range: 4 V–4.8 V per cell  
 3 Cell range: 12 V to (12 V–14.4 V); step size = 18.75 mV  
 4 Cell range: 16 V to (16 V–19.2 V); step size = 25 mV  
 a. Valid voltages are 9 V, 12 V–14.4 V, and 16 V–19.2 V. Intermediate programmed voltages between Internal DAC values are truncated to the lower value to avoid over-voltage on battery.  
 b. Programmed Voltages above max 19.2 V → Charger is enabled and the voltage regulation value is set to the maximum 19.2 V.  
 c. Programmed voltages below 12 V (except 9 V), and between 14.4 V–16 V → Charger is disabled, VOR bit is triggered, and an alarm is sent to the host.  
 d. Programmed 9 V (9000 mV = 2328 Hex) → Charger regulates to 9 V output for battery wake-up.

## PROGRAMMED VOLTAGE VALUE DIFFERENCE BETWEEN Li-Ion AND NiMH BATTERY PACK CHARGING

- Li-Ion based battery packs require both current regulation and voltage regulation loops – where constant-current and constant voltage is needed to fully charge the battery pack.
- NiMH batteries require only a constant current for charging. Thereby, the voltage regulation loop is not needed. To accomplish this, set the regulation voltage at a value greater than the maximum battery pack voltage. This will not allow the voltage regulation loop to become active. The maximum value of 19.2 V could be set for most NiMH battery packs.

### SBS-Like SMBus: Commands Implemented: Control Register

#### Charger Mode, (0x12), Write-Only [Default POR and Reset Value in BOLD TYPE]

| BIT        | SBS SPEC       | bq24721 SBS-Like   |                                    |
|------------|----------------|--|------------------------------------|
| 0 (LSB)    | INHIBIT CHARGE | END CHARGE <sup>(1)</sup>  |                                    |
|            |                | 1: Disable Charger   | 0: Enable Charger                  |
|            |                | This affects STATUS register 0x13, bit 1.  |                                    |
| 1          | ENABLE POLLING | RESERVED: Not Used. Bit always resets to zero.   |                                    |
| 2          | POR_RESET      | RESET: (Return to POR values) Charger disabled, DPM active, PWM at 300 kHz, Vout = 0, CHARGE CURR = 0, IDPM = 0  |                                    |
|            |                | 1: Reset   | <b>0: No Reset</b>                 |
| 3          | RESET_TO_ZERO  | IOUT Select: Current Sense Amplifier Output select   |                                    |
|            |                | 1: Charge current is the 20x amplifier output at IOUT pin  |                                    |
|            |                | <b>0: Adapter current is the 20x amplifier output at IOUT pin</b>  |                                    |
|            |                | The IOUT pin is multiplexed to either the charge current or the input current sense amplifiers. The Input current (ac) is the default upon power up.   |                                    |
| 4          | RESERVED       | LEARN CYCLE  |                                    |
|            |                | 1: Connect Battery to system (learn cycle) even when adapter connected   |                                    |
|            |                | <b>0: Connect AC adapter to system (no learn) when adapter connected</b>   |                                    |
|            |                | This bit affects STATUS register 0x13, bits 6 and 7.   |                                    |
| 5          | RESERVED       | PWM FS: Switching Frequency Select   |                                    |
|            |                | 1: PWM at 500 kHz  | <b>0: PWM at 300 kHz</b>           |
| 6          | RESERVED       | ACOC – AC (adapter) Over-Current   |                                    |
|            |                | 1: ACOC protection enabled   | <b>0: ACOC protection disabled</b> |
| 7          | RESERVED       | SET_ACOC <1:0>   |                                    |
| 8          | RESERVED       | 00: ACOC=DPM × 1.3   | <b>01: ACOC=DPM × 1.5</b>          |
|            |                | 10: ACOC=DPM × 1.7   | <b>11: ACOC=DPM × 1.9</b>          |
|            |                | Bit 6 of this Control register 0x12 needs to be high for these bits to take effect.<br>ACOC threshold is a percentage of the DPM (input current) regulation threshold programmed by the DPM register 0x3F. |                                    |
| 9          | RESERVED       | SET_BAT_DEPL <2:0> Battery depleted threshold  |                                    |
| 10         | RESERVED       | Value set per cell   |                                    |
| 11         | RESERVED       | <b>000: [2.2V]</b> , 001:[2.3V], 010:[2.4V], 011:[2.5V]<br>100:[2.6V], 101:[2.7V], 110:[2.8V], 111:[2.9V]<br>These bits affect STATUS register 0x13, bits 11, 6 and 7.                                     |                                    |
| 12         | RESERVED       | RESERVED: Not Used. Bit always resets to zero.   |                                    |
| 13–15(MSB) | RESERVED       | RESERVED: Not Used. Bit always resets to zero.   |                                    |

- (1) END\_CHARGE bit must be LO AND the  $\overline{\text{CHRGEN}}$  pin must be LO to enable the charger. If the END\_CHARGE bit is HI or the  $\overline{\text{CHRGEN}}$  pin is HI, then the charger is disabled.

## SBS-Like SMBus: Commands Implemented: Status Register

### Charger Status, (0x13), Read-Only

All Status register bits are automatically updated by the IC whenever the system state changes, some bits have an 8 ms deglitch to prevent false alerts. Whenever a status bit changes, the **ALARM** open drain output pulls down to alert the host of a change in the status register. The **ALARM** stays low until the host performs a STATUS register (0x13) read, afterward, the **ALARM** clears and goes high impedance. An external pull-up resistor is needed at the **ALARM** pin.

| BIT     | SBS SPEC         | bq24721 SBS-Like   |
|---------|------------------|--|
| 0 (LSB) | CHARGE_INHIBITED | <p>NOT READY TO CHARGE</p> <p>1 = Charger is not ready to charge (IC comes up in this state)</p> <p>0 = Charger is ready to charge</p> <p>(Note: Same logic polarity as SBS spec, but added Feature, Not part of SBS spec.) This bit indicates all the conditions are met to allow the charger to start charging. Precursors are Power-on-Reset is completed; adapter is detected, and REGN driver rail is ready.</p>  |
| 1       | MASTER MODE      | <p>CHARGER NOT ON</p> <p>1 = Charger is Not On (IC comes up in this state)</p> <p>0 = Charger is On</p> <p>(Note: same logic polarity and different bit, from SBS spec bit 0) Hi on this bit indicates that the charger is on . If Low, the charger is off. This bit allows the user to determine if there is a fault that disable the charger. Bits in this STATUS register 0x13 can be used in conjunction with this bit to determine the source of charger turning off.</p>   |
| 2       | VOLTAGE_NOTREG   | <p>CHARGE VOLTAGE LOOP NOT ACTIVE</p> <p>1 = Charge Voltage Loop Not Active (IC comes up in this state, and in this state when charger is not enabled)</p> <p>0 = Charge Voltage Loop Active</p> <p>(Note: same logic polarity as SBS spec bit 2). A Lo on this bit indicates the battery voltage regulation loop is active and is influencing the charger regulation. There is an overlap as one loop transitions to another loop to allow for a soft transition knee. This overlap can alert that another loop is getting close to its limit and is influencing the output.</p>  |
| 3       | CURRENT_NOTREG   | <p>CHARGE CURRENT LOOP NOT ACTIVE</p> <p>1 = Charge Current Loop Not Active (IC comes up in this state, and in this state when charger is not enabled)</p> <p>0 = Charge Current Loop Active</p> <p>(Note: same logic polarity from SBS spec bit 3) A LO on this bit indicates the charge current regulation loop is active and is influencing the charger regulation. There is an overlap as one loop transitions to another loop to allow for a soft transition knee. This overlap can alert that another loop is getting close to its limit and is influencing the output.</p>  |
| 4       | LEVEL2           | <p>DPM INPUT CURRENT LOOP NOT ACTIVE</p> <p>1 = DPM Input Current Loop Not Active (IC comes up in this state, and in this state when charger is not enabled)</p> <p>0 = DPM Input Current Loop Active</p> <p>(Note: Added Feature, Not part of SBS spec. Same logic polarity from bits 2&amp;3 of SBS spec) Dynamic Power Management (DPM) dynamically reduces the charge current when the system current increases enough to cause the total input current to reach the input power limit. This gives power delivery precedence to the system current over the charge current. A Lo on this bit indicates the input current regulation loop is active and is influencing the charger regulation. There is an overlap as one loop transitions to another loop to allow for a soft transition knee. This overlap can alert that another loop is getting close to its limit and is influencing the output.</p> |
| 5       | LEVEL3           | <p>CHARGE OVERCURRENT FAULT</p> <p>(Note: Added Feature, Not part of SBS spec.)</p> <p>HI indicates the charge current was higher than the charge overcurrent limit (SROC) which is 1.7 times the charge regulation setting. This is to protect from shorts or large load transients at the output. If SROC is detected, the high-side FET is immediately turned-off, and an alarm is sent out. The charger retres again, allowing the high-side FET to turn-on the next cycle. This fault current limit continues until the fault is removed.</p>   |

| BIT | SBS SPEC        | bq24721 SBS-Like  |
|-----|-----------------|---|
| 6   | CURRENT_OR      | <p>BATTERY CONNECTED TO SYSTEM (by selector BATDRV)<br/>(Note: Added Feature, Not part of SBS spec.)</p> <p>HI indicates the battery is connected to the system output. LO indicates battery is not connected. During this HI state, the BATDRV pin is pulled 6V below the SYS pin voltage to turn on the external PMOS BAT FET. When in LO state, the BATDRV pin voltage is pulled-up to the SYS pin voltage.</p> <p>Battery is connected to system when ac is not present, or when ac is present and LEARN CYCLE is set at the control register.</p> <p>FEATURE: If in learn cycle and the battery falls below the BATDEP threshold (programmed by the control register), then the IC automatically switches from battery power to ac adapter power.</p> <p>FEATURE: Also, in all cases if system (SYS) voltage is more than 150 mV above the battery (BAT) voltage then the BAT FET is kept off until SYS discharges to within 150 mV to prevent the system capacitors from discharging into the battery. This feature protects the battery from extended high surge currents.</p> |
| 7   | VOLTAGE_OR      | <p>ADAPTER CONNECTED TO SYSTEM (by selector ACDRV)<br/>(Note: Added Feature, Not part of SBS spec.)</p> <p>HI indicates the adapter is connected to the system output. LO indicates adapter is not connected. During this HI state, the ACDRV pin is pulled 6 V below the PVCC pin voltage to turn on the external PMOS AC FET. When in LO state, the ACDRV pin voltage is pulled-up to the PVCC pin voltage.</p> <p>AC is connected to system when adapter is present (ACDET voltage is above threshold) and LEARN CYCLE is not set at the control register.</p> <p>FEATURE: If in learn cycle and the battery falls below the BATDEP threshold (programmed by the control register), then the IC automatically switches from battery power to ac adapter power.</p> <p>FEATURE: If there is an adapter overcurrent (ACOC) is detected, then the AC FET is turned off immediately to prevent a short-circuit condition or a surge current. This feature protects the battery from extended high surge currents.</p>  |
| 8   | THERMISTOR_OR   | <p>IC THERMAL SHUTDOWN FAULT<br/>(Note: Added Feature, Not part of SBS spec.)</p> <p>A HI indicates the IC temperature is too high, and had to turn-off the charger. LO indicates temperature is safe.</p> <p>FAULT DETECTION AND PROTECTION FEATURE: The IC monitors its own junction temperature. If the IC junction temperature exceeds 145°C, then the IC automatically shuts down the charger and an ALARM is triggered. SMBus communications continues to function. The charger remains off until the IC junction temperature falls below 130°C. The charger automatically restarts once the temperature falls below the hysteresis at 130°C.</p>   |
| 9   | THERMISTOR_COLD | <p>[THERMISTOR COLD</p> <p>HI indicates the thermistor temperature is too cold to allow charging. The TS pin voltage threshold would be higher than the TS cold voltage threshold when this bit is HI. A LO means the TS voltage is below the TS cold voltage threshold. Programmed by a voltage divider pulled up to the VREF5 pin.</p> <p>Note: VREF5 only comes up when ac is detected to conserve battery power, since no charging would be required.</p>   |
| 10  | THERMISTOR_HOT  | <p>THERMISTOR HOT (start) or (operating)</p> <p>HI indicates the thermistor temperature is too hot to allow charging. The TS pin voltage threshold would be lower than the TS hot voltage threshold when this bit is HI. A LO means the TS voltage is above the TS hot voltage threshold. There is a different voltage threshold before starting charge than during charging (operating). Programmed by a voltage divider pulled up to the VREF5 pin.</p> <p>Note: VREF5 only comes up when AC is detected to conserve battery power, since no charging would be required.</p>  |

| BIT         | SBS SPEC        | bq24721 SBS-Like   |
|-------------|-----------------|--|
| 11          | THERMISTOR_UR   | <p>BATTERY VOLTAGE LOW (battery depleted)</p> <p>(Note: Added Feature, Not part of SBS spec.)</p> <p>This bit goes HI when the sensed BAT voltage is below the Battery Depleted threshold programmed by the CONTROL register 0x12, bits 9,10, and 11. The programmed voltage is per cell, therefore multiply by the number of cells set by the programmed battery voltage regulation DAC, register 0x15. [3 cell for voltages between 12V-14.4V; and 4cell for voltages between 16V-19.2V].</p> <p>FEATURE: the BATDRV is turned off when the battery voltage falls below the BATDEP threshold, and the AC DRV is turned on if adapter is connected and had previously been in LEARN Cycle (bit 4 of CONTROL register, 0x12).</p>  |
| 12          | ALARM_INHIBITED | <p>VOR, VOLTAGE OUT OF RANGE (Note: moved function from bit7 of SBS spec) A HI indicates the voltage DAC value from register 0x15 is out of the valid DAC voltage range. The IC either disables the charge if below, or stays at the maximum possible programmed voltage (19.2 V) according to the following: Valid voltage DAC range and effect.</p> <ul style="list-style-type: none"> <li>Valid voltages are 9 V, 12 –14.4 V, and 16 V–19.2 V. Intermediate programmed voltages between Internal DAC values are truncated to the lower value to avoid over-voltage on battery.</li> <li>Programmed Voltages above max 19.2 V → Charger is enabled and the voltage regulation value is set to the maximum 19.2 V.</li> <li>Programmed voltages below 12 V (except 9 V), and between 14.4–16V → Charger is disabled, VOR bit is triggered, and an alarm sent to host.</li> <li>Programmed 9V (9000 mV = 2328 Hex) → Charger will regulate to 9 V output for battery wake-up.</li> </ul>   |
| 13          | POWER_FAIL      | <p>ADAPTER VOLTAGE BELOW BATTERY PACK VOLTAGE</p> <p>(Note: Added Feature, Not part of SBS spec.) A HI on this bit indicates the battery voltage is above the adapter voltage (BAT pin &gt; ACP pin).</p> <p>FEATURE: If the input falls below 150mV above the Battery voltage, the BYPASS FET immediately turns off to prevent reverse discharge of the battery into the adapter. There is an 8 ms deglitch and 100 mV to hysteresis before allowing the BYPASS FET to turn-on.</p>   |
| 14          | BATTERY PRESENT | <p>BATTERY DETECTED ( through thermistor pin)</p> <p>FEATURE: HI indicates a battery is detected through the TS pin. The TS pin voltage threshold is lower than the TS battery detect threshold when this bit is HI. A LO means the TS voltage is above the TS battery detect threshold. A resistor to ground inside the battery can be used to distinguish a good battery from a bad battery as well. Programmed by a voltage divider pulled up to the VREF5 pin.</p> <p>Note: VREF5 only comes up when ac is detected to conserve battery power, since no charging would be required.</p> <p>(Note: Added Feature. This could be used for detecting proper battery connected by selecting the proper valid resistance. This is need to be <i>ORed</i> for dual battery pack chargers to make feature optimal. This feature also is used as a safety feature to stop charge immediately when the battery pack is not detected – this allows a faster response time by autonomously terminating charge when no battery is detected, as opposed to waiting until the host detects the battery is removed and then alerting the charger.</p> |
| 15<br>(MSB) | AC_PRESENT      | <p>AC ADAPTOR DETECTED</p> <p>This bit is HI when the adapter is detected (ACDET pin voltage is above the acdetect threshold of 2.4V). The voltage can be programmed by an external resistor divider from adapter input to ground. Charge is not allowed until the ACDET threshold is exceeded. VREF5 LDO output only turns on when the ACDET threshold is exceeded (adapter detected).</p> <p>REGN POR and SMBus communication will begin soon after ACDET threshold is above 1.2 V and the VCC is above 6.5 V.</p>   |

## ELECTRICAL CHARACTERISTICS

7 Vdc  $\leq V_{(VCC)} \leq 24$  Vdc,  $-20^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$ , ref = AGND (unless otherwise noted).

| PARAMETER                                 |   | MIN | TYP | MAX | UNIT          |
|---|---|-----|-----|-----|---------------|
| <b>SMBus TIMING CHARACTERISTICS</b>       |   |     |     |     |               |
| $t_R$                                     | SCLK/SDATA rise time  |     |     | 1   | $\mu\text{s}$ |
| $t_F$                                     | SCLK/SDATA fall time  |     |     | 300 | ns            |
| $t_{W(H)}$                                | SCLK pulse width high   | 4   |     | 50  | $\mu\text{s}$ |
| $t_{W(L)}$                                | SCLK Pulse Width Low  | 4.7 |     |     | $\mu\text{s}$ |
| $t_{SU(STA)}$                             | Setup time for START condition  | 4.7 |     |     | $\mu\text{s}$ |
| $t_{H(STA)}$                              | START condition hold time after which first clock pulse is generated                  | 4   |     |     | $\mu\text{s}$ |
| $t_{SU(DAT)}$                             | Data setup time   | 250 |     |     | ns            |
| $t_{H(DAT)}$                              | Data hold time  | 300 |     |     | ns            |
| $t_{SU(STOP)}$                            | Setup time for STOP condition   | 4   |     |     | $\mu\text{s}$ |
| $t_{(BUF)}$                               | Bus free time between START and STOP condition  | 4.7 |     |     | $\mu\text{s}$ |
| $F_{S(CL)}$                               | Clock Frequency   | 10  |     | 100 | kHz           |
| <b>ALARM LOGIC TIMING CHARACTERISTICS</b> |   |     |     |     |               |
| $t_{ALM}$                                 | Time delay from status register bit toggling to ALERT: LO $\rightarrow$ HI transition | 6   |     | 10  | ms            |
| <b>HOST COMMUNICATION FAILURE</b>         |   |     |     |     |               |
| $t_{timeout}$                             | SMBus bus release timeout   | 25  |     | 35  | ms            |
| $t_{BOOT}$                                | Deglintch for watchdog reset signal   |     | 10  |     | msec          |
| $t_{WDI}$                                 | Watchdog timeout period   | 140 | 170 | 200 | s             |
| <b>OUTPUT BUFFER CHARACTERISTICS</b>      |   |     |     |     |               |
| $V_{(SDAL)}$                              | Output LO voltage at SDA, $I_{(SDA)} = 3$ mA  |     |     | 0.4 | V             |

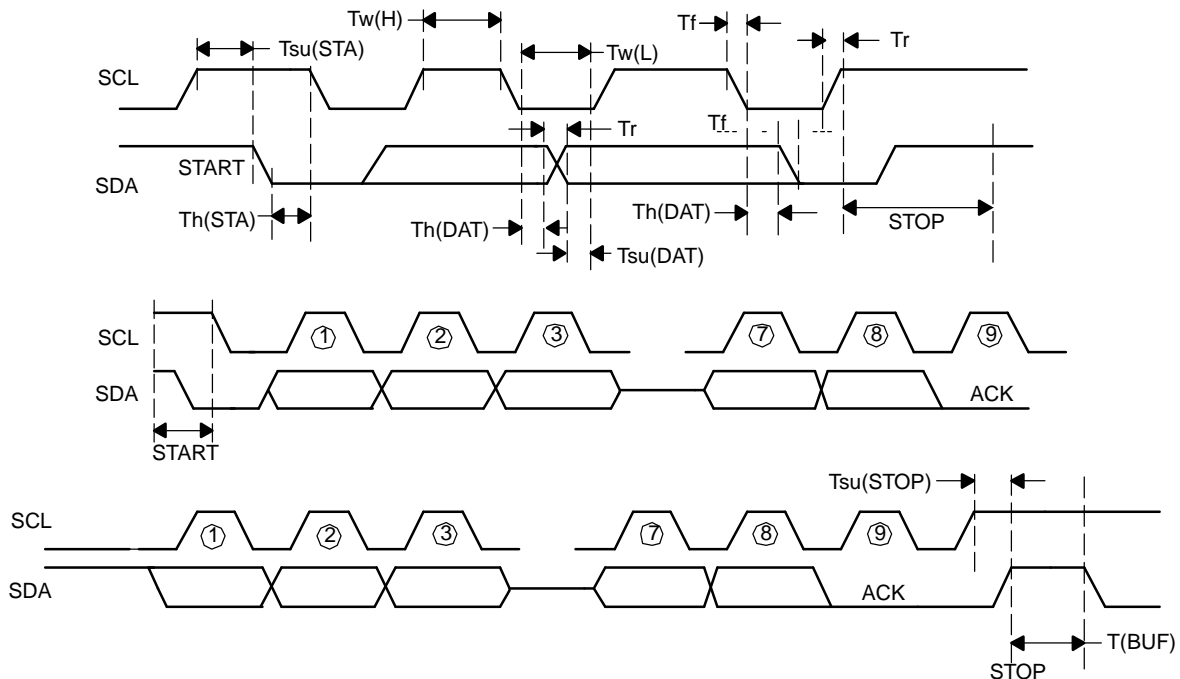


Figure 60.



## FUNCTIONAL DESCRIPTION

### SMBus OVERVIEW

An SMBus communication port provides a simple way for an SMBus compatible host to access system status information and reset fault modes. Functioning as a SLAVE port enables SMBus compatible hosts to WRITE to internal registers or READ from internal registers. The bq24721 SMBus port is a 2-wire bidirectional interface using SCL (clock) and SDA (data) pins; the SDA pin is open drain and requires an external pull-up. The SMBus is designed to operate at SCL frequencies up to 100 kHz. The standard 8 bit command is supported, the CMD part of the sequence is the 8 bit register address which is READ from or WRITE to. The bq24721 does not support packet error correction, PEC, as a mechanism to confirm proper communication between it and the host.

### SMBus ADDRESS

The SMBus specification contains several global addresses, to which the slaves on the bus are required to respond. The bq24721 responds to the SBS charger addresses of 0x12 for writes and 0x13 for reads. The bq24721 only responds (ACK) to the above listed addresses, and does (NACK) not respond to any other address.

| BYTE                                    | BIT |    |    |    |    |    |    |     |
|---|-----|----|----|----|----|----|----|-----|
|   | MSB | 6  | 5  | 4  | 3  | 2  | 1  | LSB |
| bq24721 SMBus WRITE ADDRESS SBS Charger | 0   | 0  | 0  | 1  | 0  | 0  | 1  | 0   |
| bq24721 SMBus READ ADDRESS SBS Charger  | 0   | 0  | 0  | 1  | 0  | 0  | 1  | 1   |
| COMMAND                                 | 0   | 0  | 0  | 1  | C3 | C2 | C1 | C0  |
| I/O DATA BUS                            | D7  | D6 | D5 | D4 | D3 | D2 | D1 | D0  |

### INTERNAL REGISTER MAP

The status data and control data is referenced by the following Commands.

| COMMAND | R/W | REGISTER DESCRIPTION |
|---------|-----|----------------------|
| 0x12    | R/W | Charger Mode         |
| 0x13    | R   | Charger Status       |
| 0x14    | R/W | Charging Current     |
| 0x15    | R/W | Charging Voltage     |
| 0x3F    | R/W | Input Current        |

### SMBus BUS RELEASE

The bq24721 SMBus engine does not create START or STOP states on the SMBus bus during normal operation. However, if a 2 second (typical) SDA low timeout is exceeded the bq24721 releases the bus, thus creating a stop condition.

### SMBus COMMUNICATION PROTOCOL

The following conventions is used when describing the communication protocol.

| CONDITION  | CODE   |
|--|--------|
| START sent from host   | S      |
| STOP sent from host  | P      |
| bq24721 SMBus slave address sent from host, bus direction set from host to bq24721 (WRITE) | hA0    |
| bq24721 register address sent from bq24721, bus direction is from bq24721 to host (READ)   | hA1    |
| Non-valid SMBus slave address sent from host   | hA_N   |
| Valid bq24721 register address sent from host  | HCMD   |
| Nonvalid bq24721 register address sent from host   | HCMD_N |
| I/O data byte (8 bits) sent from host to bq24721   | hDATA  |
| I/O data byte (8 bits) sent from bq24721 to host   | bqDATA |
| Acknowledge (ACK) from host  | hA     |

| CONDITION                           | CODE |
|-------------------------------------|------|
| Not acknowledge (NACK) from host    | hN   |
| Acknowledge (ACK) from bq24721      | bqA  |
| Not acknowledge (NACK) from bq24721 | bqN  |
| Repeated Start                      | R    |

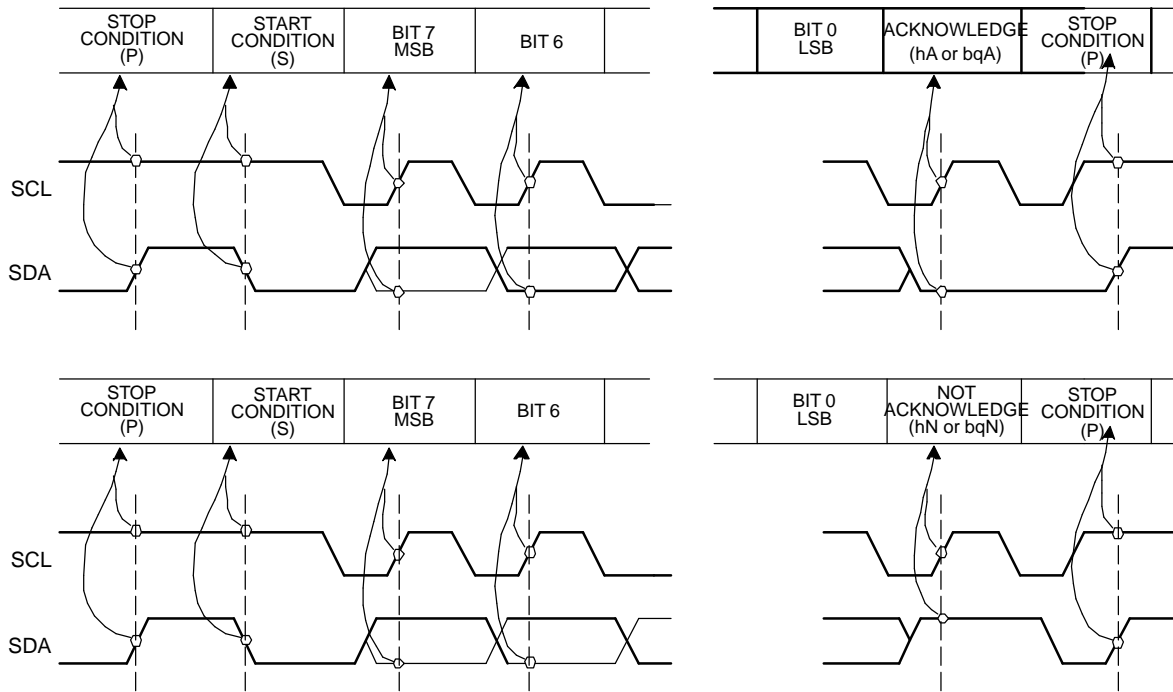


Figure 61.

**SMBus READ/WRITE SEQUENCES**

The bq24721 supports the standard SMBus Word Write, as well as the SMBus Word READ. The basic SMBus word read protocol has the following steps:

1. Host sends a start and bq24721 SMBus slave write address
2. bq24721 ACK's that this is a valid SMBus address and that the bus is configured for write
3. Host sends bq24721 command
4. bq24721 ACK's that this is a valid command and stores the command for a possible read
5. Host sends a repeated start and bq24721 SMBus slave read address, reconfiguring the bus for read
6. bq24721 ACK's that this is a valid address and that bus is reconfigured
7. Bus is in read mode, bq24721 starts sending 2 bytes of data chosen by the command.

The SMBus write protocol is similar to the read, without the need for a repeated start and bus being set in write mode. If the address sent by host is not a valid address , the command is NACKed. The host can complete a READ or a WRITE sequence with either a STOP or a START. In a WRITE it is not necessary to end each word WRITE command with a STOP, a START has the same effect (repeated start).

## VALID WRITE SEQUENCES

The bq24721 will always ACK its own address. If the CMD points to an allowable READ or WRITE data bq24721 writes the command into its command register and send an ACK. If the CMD points to a nonallowed command bq24721 does NOT write the command into its command register and sends a NACK.

|   |     |     |
|---|-----|-----|
| S | hA0 | bqA |
|---|-----|-----|

|   |     |     |        |     |
|---|-----|-----|--------|-----|
| S | hA0 | bqA | hCMD_N | bqN |
|---|-----|-----|--------|-----|

## WORD WRITE

The data is written to a control register at the end of the ACK after the second byte in the sequence. If an word write sequence is interrupted by a STOP or START, no data is written to the device. The host can cancel a WRITE by sending a STOP or START before the trailing edge of ACK clock pulse.

|   |     |     |      |     |       |     |       |     |   |
|---|-----|-----|------|-----|-------|-----|-------|-----|---|
| S | hA0 | bqA | hCMD | bqA | hDATA | bqA | hDATA | bqA | P |
|---|-----|-----|------|-----|-------|-----|-------|-----|---|

## VALID READ SEQUENCES

The bq24721 will only ACK its READ address if it occurs following a repeated start where the high SCL clock time is less then the  $t_{W(H)}$ , MAX of 50  $\mu$ s. Upon receiving hA1, bq24721 outputs 2 bytes of data as indicated by the preceding command. The command sequence is terminated by a STOP. The START and the STOP both act as priority interrupts. If the host has been interrupted and is not sure where it left off, it sends a STOP and resets the bq24721 state machine to the Idle state. Once in idle state, bq24721 ignores all activity on the SCL and SDA lines until it receives a START. If a read sequence is terminated early by a START or STOP, the entire sequence must be restarted by the host for valid data.

|   |     |     |      |     |   |     |     |        |    |        |    |   |
|---|-----|-----|------|-----|---|-----|-----|--------|----|--------|----|---|
| S | hA0 | bqA | hCMD | bqA | R | hA1 | bqA | bqDATA | hA | bqDATA | hN | P |
|---|-----|-----|------|-----|---|-----|-----|--------|----|--------|----|---|

## SMBus WORD READ

A valid Command is required to write to the bq24721, and a valid Command is required to specify the data to be read. Once a read command is received the register data for the specified command is output to the host.

## NONVALID SEQUENCES

START and non-hA0 or non-hA1 Address

A START followed by an address which is not bqA0 or bqA1 is NACKED.

### Attempt to Specify Nonallowed Command

If the CMD points to a nonallowed command (reserved registers) , bq24721 sends a NACK back to the host. Note that bq24721 NACKS whether a stop is sent or not.

|   |     |     |        |     |
|---|-----|-----|--------|-----|
| S | hA0 | bqA | hCMD_N | bqN |
|---|-----|-----|--------|-----|

|   |      |     |
|---|------|-----|
| S | hA_N | bqN |
|---|------|-----|

## STATUS AND CONTROL REGISTERS

The SMBUS-Like communication engine allows easy access to system status data contained in internal registers that contain information on current status for system power selection, charger mode and fault conditions. Any change on the state of those bits generates an interrupt request to the host ( $\overline{\text{ALARM}}$  pin = HI).

**Table 2. Status Register Latched Bits**


| ACOC/CHGOC LATCHES              |                    |   |
|---------------------------------|--------------------|---|
| SET                             | RESET              | CONTROL LOGIC ACTION AT DETECTION   |
| Charger overcurrent detected    | Host read register | Latches data going to status register, disables further updates on status register CHGOC bit until reset. |
| AC adapter overcurrent detected | Host read register | Latches data going to status register, disables further updates on ACOC bit until reset.                  |

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB), the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to a ground plane or special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, Quad Flatpack No-Lead Logic Packages, Texas Instruments Literature No. SCBA017. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

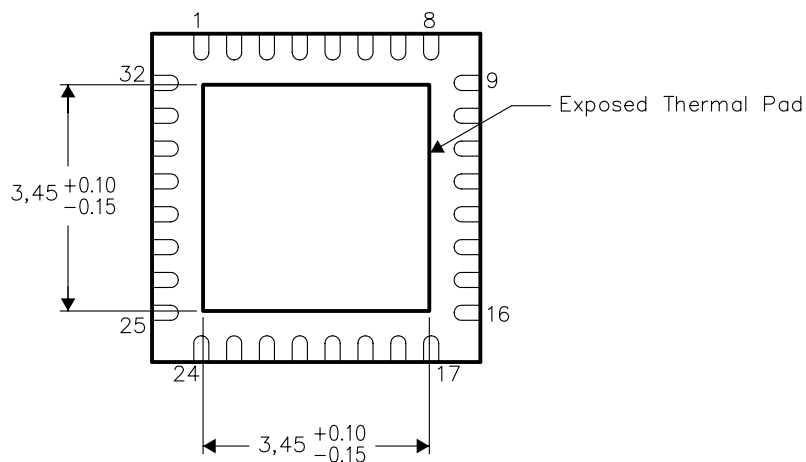

Bottom View

NOTE: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

## PACKAGING INFORMATION

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| BQ24721RHBR      | ACTIVE                | QFN          | RHB             | 32   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| BQ24721RHBT      | ACTIVE                | QFN          | RHB             | 32   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## RHB (S-PQFP-N32)

## PLASTIC QUAD FLATPACK

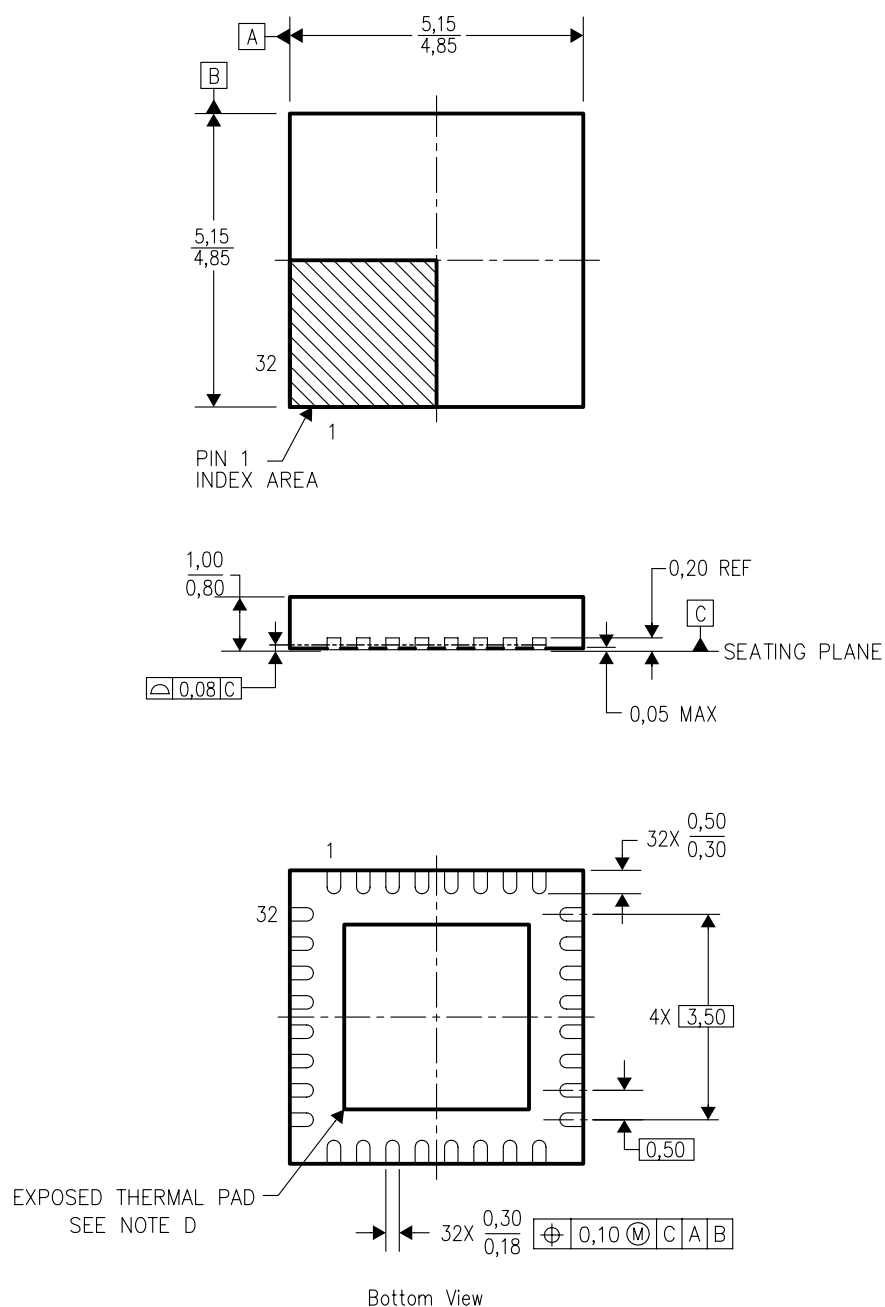

4204326/C xx/04

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) Package configuration.
  - D. The Package thermal pad must be soldered to the board for thermal and mechanical performance. See product data sheet for details regarding the exposed thermal pad dimensions.
  - E. Falls within JEDEC MO-220.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |  | <b>Applications</b> |  |
|------------------|--|---------------------|--|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |  | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |  | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |  | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)