


Model 140

Vishay Spectrol



1/2" (12.7 mm) Single - Turn Wirewound Bushing Mount Type Precision Potentiometer

**FEATURES**

- Ohmic value range: 50 Ω up to 20 k Ω
- Smallest size available: 12.7 mm
- Mechanical stops on request
- High torque and sealed versions available

RoHS
COMPLIANT**ELECTRICAL SPECIFICATIONS**

| PARAMETER | |
|-----------------------------|--|
| Total Resistance | 50 Ω to 20 k Ω |
| Tolerance | $\pm 5\%$ |
| Absolute Minimum Resistance | Linearity x total resistance or 0.5 Ω , whichever is greater |
| Linearity (Independent) | $\pm 1.0\%$ |
| Noise | 100 Ω ENR |
| Power Rating | 2 W at 40 $^{\circ}\text{C}$ ambient derating linearly to zero at 125 $^{\circ}\text{C}$ |
| Insulation Resistance | 1000 M Ω min. 500 V _{DC} |
| Dielectric Strength | 1000 V _{RMS} , 60 Hz |
| Electrical Angle | 320 $^{\circ} \pm 5^{\circ}$ |
| End Voltage | Linearity x total applied voltage for total resistance above 20 Ω ; 2.0 % of total applied voltage for 20 Ω and below |

MATERIAL SPECIFICATIONS

| | |
|---|---|
| Shaft | Stainless steel, non magnetic non-passivated |
| Housing | Aluminum, anodized |
| Rear Lid | Molded glass filled thermoset plastic |
| Terminals | Brass, gold plated |
| Mounting Hardware Lockwasher Internal Tooth: Panel Nut: | Steel, nickel plated. Brass, nickel plated |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-------------------|---|
| Vibration | 20 G thru 2000 Hz |
| Shock | 50 g |
| Salt Spray | 96 h |
| Rotational Life | 500 000 shaft revolutions |
| Load Life | 900 h |
| Temperature Range | - 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$ (operating) |

ORDERING INFORMATION/DESCRIPTION

| 140B MODEL | 0 MECHANICAL OPTIONS | 0 SPECIAL FEATURE | 20K OHMIC VALUE | BO10 PACKAGING |
|---------------|---|--|--------------------|-------------------|
| | 0. Stops, slotted shaft (std) 1. Plain shaft 2. Shaft lock 3. Continuous rotation 4. Combination 1 and 2 5. Combination 1 and 3 6. Combination 2 and 3 7. Combination 1, 2 and 3 | 0. Standard torque 1. Center tap (10K max. Rt) 2. High torque 3. Sealed construction 4. Combination 1 and 2 5. Combination 1 and 3 6. Combination 2 and 3 7. Combination 1, 2 and 3 | | Box of 10 pieces |

SAP PART NUMBERING GUIDELINES

| 140B MODEL | 7 MECHANICAL OPTION | 0 FEATURE | 103 OHMIC VALUE | B10 PACKAGING |
|---------------|------------------------|--------------|--------------------|---------------------|
| | From 0 to 7 | From 0 to 7 | 103 = 10K | Box of 10 pieces |




Model 140


1/2" (12.7 mm) Single - Turn Wirewound Bushing Mount Type Precision Potentiometer

Vishay Spectrol


DIMENSIONS in inches (millimeters)

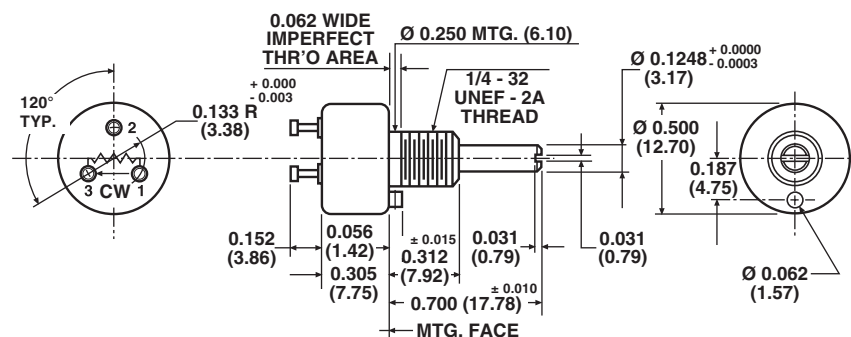

SHAFT LOCK OPTION

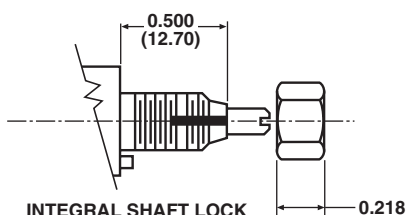


CENTER TAP OPTION

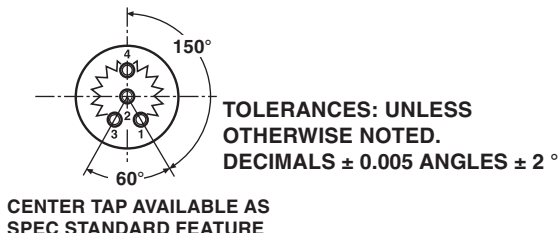

MECHANICAL SPECIFICATIONS

| PARAMETER | |
|-------------------|----------------------------------|
| Rotation | 330° ± 5° |
| Bearing Type | SLEEVE BEARING |
| Torque (Maximums) | |
| Starting | 0.2 oz. - in (14.40 g - cm) |
| Running | 0.2 oz. - in (14.40 g - cm) |
| Dead Zone | Not applicable |
| Weight | 0.1 oz. maximum (2.84 g) |
| Stop Strength | 5 in - lbs (5.76 kg - cm) static |
| Runouts (Maximum) | |
| Shaft (TIR) | 0.002" (0.05 cm) |
| Pilot Dia. (TIR) | 0.002" (0.05 cm) |
| Lateral (TIR) | 0.003" (0.08 cm) |
| Shaft End Play | 0.006" (0.15 cm) |
| Shaft Radial Play | 0.003" (0.08 cm) |

POWER RATING CHART

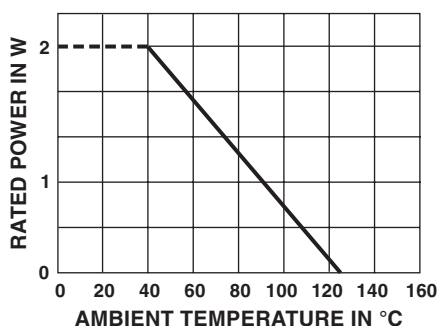

MARKING

| | |
|---------------------|--|
| Unit Identification | Units shall be marked with manufacturer's name, model number, resistance value and tolerance, circuit diagram, terminal identification, linearity and data code. |
|---------------------|--|

RESISTANCE ELEMENT DATA

| STD RESISTANCE VALUES (Ω) | RESOLUTION (%) | OHMS PER TURN | MAXIMUM CURRENT AT 40 °C AMBIENT (mA) | MAXIMUM VOLTAGE ACROSS COIL (V) | WIRE TEMP. COEF. (ppm/°C) |
|---------------------------|----------------|---------------|---------------------------------------|---------------------------------|---------------------------|
| 50 | 0.542 | 0.271 | 200.0 | 10.0 | 20 |
| 100 | 0.431 | 0.431 | 141.0 | 14.1 | 20 |
| 200 | 0.361 | 0.722 | 100.0 | 20.0 | 20 |
| 500 | 0.312 | 1.56 | 63.2 | 31.6 | 20 |
| 1K | 0.255 | 2.55 | 44.7 | 44.7 | 20 |
| 2K | 0.197 | 3.94 | 31.6 | 63.2 | 20 |
| 5K | 0.170 | 8.50 | 20.0 | 100.0 | 20 |
| 10K | 0.147 | 14.7 | 14.1 | 141.0 | 20 |
| 20K | 0.105 | 21.0 | 10.0 | 200.0 | 20 |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.