

TVP5150AM1

Ultralow-Power NTSC/PAL/SECAM Video Decoder

Data Manual



PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Literature Number: SLES209A
November 2007–Revised August 2009

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

Contents

| | | |
|----------|---|-----------|
| 1 | TVP5150AM1 Features | 7 |
| 1.1 | Features | 7 |
| 2 | Introduction | 8 |
| 2.1 | Description | 8 |
| 2.2 | Applications | 9 |
| 2.3 | Trademarks | 9 |
| 2.4 | Document Conventions | 9 |
| 2.5 | Ordering Information | 9 |
| 2.6 | Functional Block Diagram | 10 |
| 2.7 | Terminal Assignments | 11 |
| 3 | Functional Description | 14 |
| 3.1 | Analog Front End | 14 |
| 3.2 | Composite Processing Block Diagram | 14 |
| 3.3 | Adaptive Comb Filtering | 15 |
| 3.4 | Color Low-Pass Filter | 15 |
| 3.5 | Luminance Processing | 16 |
| 3.6 | Chrominance Processing | 16 |
| 3.7 | Timing Processor | 16 |
| 3.8 | VBI Data Processor (VDP) | 16 |
| 3.9 | VBI FIFO and Ancillary Data in Video Stream | 17 |
| 3.10 | Raw Video Data Output | 18 |
| 3.11 | Output Formatter | 18 |
| 3.12 | Synchronization Signals | 18 |
| 3.13 | Active Video (AVID) Cropping | 20 |
| 3.14 | Embedded Syncs | 21 |
| 3.15 | I ² C Host Interface | 22 |
| 3.15.1 | I ² C Write Operation | 23 |
| 3.15.2 | I ² C Read Operation | 23 |
| 3.15.2.1 | Read Phase 1 | 24 |
| 3.15.2.2 | Read Phase 2 | 24 |
| 3.15.2.3 | I ² C Timing Requirements | 25 |
| 3.16 | Clock Circuits | 25 |
| 3.17 | Genlock Control (GLCO) and RTC | 25 |
| 3.17.1 | GLCO Interface | 26 |
| 3.17.2 | RTC Mode | 26 |
| 3.18 | Reset and Power Down | 27 |
| 3.19 | Internal Control Registers | 27 |
| 3.20 | Register Definitions | 30 |
| 3.20.1 | Video Input Source Selection #1 Register | 30 |
| 3.20.2 | Analog Channel Controls Register | 30 |
| 3.20.3 | Operation Mode Controls Register | 31 |
| 3.20.4 | Miscellaneous Controls Register | 32 |
| 3.20.5 | Autoswitch Mask Register | 35 |
| 3.20.6 | Color Killer Threshold Control Register | 35 |
| 3.20.7 | Luminance Processing Control #1 Register | 36 |
| 3.20.8 | Luminance Processing Control #2 Register | 37 |
| 3.20.9 | Brightness Control Register | 37 |
| 3.20.10 | Color Saturation Control Register | 38 |
| 3.20.11 | Hue Control Register | 38 |
| 3.20.12 | Contrast Control Register | 38 |

| | | |
|---------|--|--------------------|
| 3.20.13 | Outputs and Data Rates Select Register | 39 |
| 3.20.14 | Luminance Processing Control #3 Register | 40 |
| 3.20.15 | Configuration Shared Pins Register | 41 |
| 3.20.16 | Active Video Cropping Start Pixel MSB Register | 41 |
| 3.20.17 | Active Video Cropping Start Pixel LSB Register | 42 |
| 3.20.18 | Active Video Cropping Stop Pixel MSB Register | 42 |
| 3.20.19 | Active Video Cropping Stop Pixel LSB Register | 42 |
| 3.20.20 | Genlock and RTC Register | 42 |
| 3.20.21 | Horizontal Sync Start Register | 43 |
| 3.20.22 | Vertical Blanking Start Register | 44 |
| 3.20.23 | Vertical Blanking Stop Register | 45 |
| 3.20.24 | Chrominance Control #1 Register | 45 |
| 3.20.25 | Chrominance Control #2 Register | 46 |
| 3.20.26 | Interrupt Reset Register B | 47 |
| 3.20.27 | Interrupt Enable Register B | 48 |
| 3.20.28 | Interrupt Configuration Register B | 49 |
| 3.20.29 | Video Standard Register | 49 |
| 3.20.30 | Cb Gain Factor Register | 50 |
| 3.20.31 | Cr Gain Factor Register | 50 |
| 3.20.32 | Macrovision On Counter Register | 50 |
| 3.20.33 | Macrovision Off Counter Register | 50 |
| 3.20.34 | 656 Revision Select Register | 50 |
| 3.20.35 | MSB of Device ID Register | 51 |
| 3.20.36 | LSB of Device ID Register | 51 |
| 3.20.37 | ROM Major Version Register | 51 |
| 3.20.38 | ROM Minor Version Register | 51 |
| 3.20.39 | Vertical Line Count MSB Register | 51 |
| 3.20.40 | Vertical Line Count LSB Register | 52 |
| 3.20.41 | Interrupt Status Register B | 52 |
| 3.20.42 | Interrupt Active Register B | 53 |
| 3.20.43 | Status Register #1 | 53 |
| 3.20.44 | Status Register #2 | 54 |
| 3.20.45 | Status Register #3 | 54 |
| 3.20.46 | Status Register #4 | 55 |
| 3.20.47 | Status Register #5 | 55 |
| 3.20.48 | Closed Caption Data Registers | 56 |
| 3.20.49 | WSS Data Registers | 56 |
| 3.20.50 | VPS Data Registers | 57 |
| 3.20.51 | VITC Data Registers | 57 |
| 3.20.52 | VBI FIFO Read Data Register | 57 |
| 3.20.53 | Teletext Filter and Mask Registers | 57 |
| 3.20.54 | Teletext Filter Control Register | 59 |
| 3.20.55 | Interrupt Status Register A | 60 |
| 3.20.56 | Interrupt Enable Register A | 61 |
| 3.20.57 | Interrupt Configuration Register A | 62 |
| 3.20.58 | VDP Configuration RAM Register | 62 |
| 3.20.59 | VDP Status Register | 64 |
| 3.20.60 | FIFO Word Count Register | 65 |
| 3.20.61 | FIFO Interrupt Threshold Register | 65 |
| 3.20.62 | FIFO Reset Register | 65 |
| 3.20.63 | Line Number Interrupt Register | 65 |
| 3.20.64 | Pixel Alignment Registers | 66 |
| 3.20.65 | FIFO Output Control Register | 66 |

Ultralow-Power NTSC/PAL/SECAM Video DecoderSLES209A–NOVEMBER 2007–REVISED AUGUST 2009

| | | |
|----------|---|--------------------|
| 3.20.66 | Full Field Enable Register | 66 |
| 3.20.67 | Line Mode Registers | 67 |
| 3.20.68 | Full Field Mode Register | 68 |
| 4 | Electrical Specifications | 69 |
| 4.1 | Absolute Maximum Ratings | 69 |
| 4.2 | Recommended Operating Conditions | 69 |
| 4.3 | Electrical Characteristics | 70 |
| 4.3.1 | DC Electrical Characteristics | 70 |
| 4.3.2 | Analog Electrical Characteristics | 70 |
| 4.3.3 | Clocks, Video Data, Sync Timing | 71 |
| 4.3.4 | I ² C Host Port Timing | 72 |
| 5 | Example Register Settings | 73 |
| 5.1 | Example 1 | 73 |
| 5.1.1 | Assumptions | 73 |
| 5.1.2 | Recommended Settings | 73 |
| 5.2 | Example 2 | 74 |
| 5.2.1 | Assumptions | 74 |
| 5.2.2 | Recommended Settings | 74 |
| 6 | Application Information | 75 |
| 6.1 | Application Example | 75 |

List of Figures

| | | |
|-----|--|--------------------|
| 2-1 | Functional Block Diagram..... | 10 |
| 2-2 | Terminal Diagrams..... | 11 |
| 3-1 | Composite Processing Block Diagram (Comb/Trap Filter Bypassed for SECAM) | 15 |
| 3-2 | 8-Bit 4:2:2, Timing With 2× Pixel Clock (SCLK) Reference | 19 |
| 3-3 | Horizontal Synchronization Signals..... | 20 |
| 3-4 | AVID Application | 21 |
| 3-5 | Reference Clock Configurations | 25 |
| 3-6 | GLCO Timing | 26 |
| 3-7 | RTC Timing | 26 |
| 3-8 | Configuration Shared Pins..... | 34 |
| 3-9 | Horizontal Sync..... | 44 |
| 4-1 | Clocks, Video Data, and Sync Timing..... | 71 |
| 4-2 | I ² C Host Port Timing..... | 72 |
| 6-1 | Application Example | 75 |

Ultralow-Power NTSC/PAL/SECAM Video DecoderSLES209A–NOVEMBER 2007–REVISED AUGUST 2009

List of Tables

| | | |
|------|---|--------------------|
| 2-1 | Terminal Functions..... | 12 |
| 3-1 | Data Types Supported by VDP | 16 |
| 3-2 | Ancillary Data Format and Sequence | 17 |
| 3-3 | Summary of Line Frequencies, Data Rates, and Pixel Counts | 18 |
| 3-4 | EAV and SAV Sequence..... | 21 |
| 3-5 | Write Address Selection..... | 22 |
| 3-6 | I ² C Terminal Description | 22 |
| 3-7 | Read Address Selection..... | 23 |
| 3-8 | Reset and Power-Down Modes | 27 |
| 3-9 | Register Summary | 27 |
| 3-10 | Analog Channel and Video Mode Selection | 30 |
| 3-11 | Digital Output Control..... | 33 |
| 3-12 | Clock Delays (SCLKs)..... | 44 |
| 3-13 | VBI Configuration RAM for Signals With Pedestal | 63 |

1 TVP5150AM1 Features

1.1 Features

- Accepts NTSC (M, 4.43), PAL (B, D, G, H, I, M, N), and SECAM (B, D, G, K, K1, L) Video Data
- Supports ITU-R BT.601 Standard Sampling
- High-Speed 9-Bit Analog-to-Digital Converter (ADC)TM
- Two Composite Inputs or One S-Video Input
- Fully Differential CMOS Analog Preprocessing Channels With Clamping and Automatic Gain Control (AGC) for Best Signal-to-Noise (S/N) Performance
- Ultralow Power Consumption
- 48-Terminal PBGA Package or 32-Terminal TQFP Package
- Power-Down Mode: <1 mW
- Brightness, Contrast, Saturation, Hue, and Sharpness Control Through I²C
- Complementary 4-Line (3-H Delay) Adaptive Comb Filters for Both Cross-Luminance and Cross-Chrominance Noise Reduction
- Patented Architecture for Locking to Weak, Noisy, or Unstable Signals
- Single 14.31818-MHz Crystal for All Standards
- Internal Phase-Locked Loop (PLL) for Line-Locked Clock and Sampling
- Subcarrier Genlock Output for Synchronizing Color Subcarrier Of External Encoder
- Standard Programmable Video Output Formats
 - ITU-R BT.656, 8-Bit 4:2:2 With Embedded Syncs
 - 8-Bit 4:2:2 With Discrete Syncs
- Macrovision Copy Protection Detection
- Advanced Programmable Video Output Formats
 - 2× Oversampled Raw Vertical Blanking Interval (VBI) Data During Active Video
 - Sliced VBI Data During Horizontal Blanking or Active Video
- VBI Modes Supported
 - Teletext (NABTS, WST)
 - Closed-Caption Decode With FIFO and Extended Data Services (EDS)
 - Wide Screen Signaling, Video Program System, CGMS, Vertical Interval Time Code
 - Gemstar 1x/2x Electronic Program Guide Compatible Mode
 - Custom Configuration Mode That Allows User to Program Slice Engine for Unique VBI Data Signals
- Power-On Reset
- Industrial Temperature Range (TVP5150AM1I): 40 °C to 85°C
- Qualified for Automotive Applications (AEC-Q100 Rev G – TVP5150AM1IPBSQ1, TVP5150AM1IPBSRQ)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this document.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

2 Introduction

2.1 Description

The TVP5150AM1 device is an ultralow-power NTSC/PAL/SECAM video decoder. Available in a space-saving 48-terminal ZQC package or a 32-terminal TQFP package, the TVP5150AM1 decoder converts NTSC, PAL, and SECAM video signals to 8-bit ITU-R BT.656 format. Discrete syncs are also available. The optimized architecture of the TVP5150AM1 decoder allows for ultralow power consumption. The decoder consumes 115 mW of power in typical operation and consumes less than 1 mW in power-down mode, considerably increasing battery life in portable applications. The decoder uses just one crystal for all supported standards. The TVP5150AM1 decoder can be programmed using an I²C serial interface. The decoder uses a 1.8-V supply for its analog and digital supplies and a 3.3-V supply for its I/O.

The TVP5150AM1 decoder converts baseband analog video into digital YCbCr 4:2:2 component video. Composite and S-video inputs are supported. The TVP5150AM1 decoder includes one 9-bit analog-to-digital converter (ADC) with 2× sampling. Sampling is ITU-R BT.601 (27.0 MHz, generated from the 14.31818-MHz crystal or oscillator input) and is line locked. The output formats can be 8-bit 4:2:2 or 8-bit ITU-R BT.656 with embedded synchronization.

The TVP5150AM1 decoder utilizes Texas Instruments patented technology for locking to weak, noisy, or unstable signals. A Genlock/real-time control (RTC) output is generated for synchronizing downstream video encoders.

Complementary four-line adaptive comb filtering is available for both the luma and chroma data paths to reduce both cross-luma and cross-chroma artifacts; a chroma trap filter is also available.

Video characteristics including hue, contrast, brightness, saturation, and sharpness may be programmed using the industry standard I²C serial interface. The TVP5150AM1 decoder generates synchronization, blanking, lock, and clock signals in addition to digital video outputs. The TVP5150AM1 decoder includes methods for advanced vertical blanking interval (VBI) data retrieval. The VBI data processor slices, parses, and performs error checking on teletext, closed caption, and other data in several formats.

The TVP5150AM1 decoder detects copy-protected input signals according to the Macrovision standard and detects Type 1, 2, 3, and colorstripe pulses.

The main blocks of the TVP5150AM1 decoder include:

- Robust sync detector
- ADC with analog processor
- Y/C separation using four-line adaptive comb filter
- Chrominance processor
- Luminance processor
- Video clock/timing processor and power-down control
- Output formatter
- I²C interface
- VBI data processor
- Macrovision detection for composite and S-video

2.2 Applications

The following is a partial list of suggested applications:

- Digital televisions
- PDAs
- Notebook PCs
- Cell phones
- Video recorder/players
- Internet appliances/web pads
- Handheld games
- Surveillance
- Portable navigation
- Automotive

2.3 Trademarks

TI and MicroStar Junior are trademarks of Texas Instruments.

Macrovision is a trademark of Macrovision Corporation.

CompactPCI is a trademark of PICMG – PCI Industrial Computer Manufacturers Group, Inc.

Intel is a trademark of Intel Corporation.

Other trademarks are the property of their respective owners.

2.4 Document Conventions

Throughout this data manual, several conventions are used to convey information. These conventions are:

- To identify a binary number or field, a lower case b follows the numbers. For example, 000b is a 3-bit binary field.
- To identify a hexadecimal number or field, a lower case h follows the numbers. For example, 8AFh is a 12-bit hexadecimal field.
- All other numbers that appear in this document that do not have either a b or h following the number are assumed to be decimal format.
- If the signal or terminal name has a bar above the name (for example, $\overline{\text{RESETB}}$) this indicates the logical NOT function. When asserted, this signal is a logic low, 0, or 0b.
- RSVD indicates that the referenced item is reserved.

2.5 Ordering Information

| T _A | PACKAGED DEVICES ⁽¹⁾⁽²⁾ | PACKAGE OPTION |
|----------------|------------------------------------|----------------|
| 0°C to 70°C | TVP5150AM1PBS | Tray |
| | TVP5150AM1PBSR | Tape and reel |
| | TVP5150AM1ZQC | Tray |
| | TVP5150AM1ZQCR | Tape and reel |
| 40 °C to 85°C | TVP5150AM1IPBS | Tray |
| | TVP5150AM1IPBSR | Tape and reel |
| | TVP5150AM1IPBSQ1 ⁽³⁾ | Tray |
| | TVP5150AM1IPBSRQ ⁽³⁾ | Tape and reel |
| | TVP5150AM1IZQC | Tray |
| | TVP5150AM1IZQCR | Tape and reel |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

(3) AEC-Q100 Rev G Certified

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

2.6 Functional Block Diagram

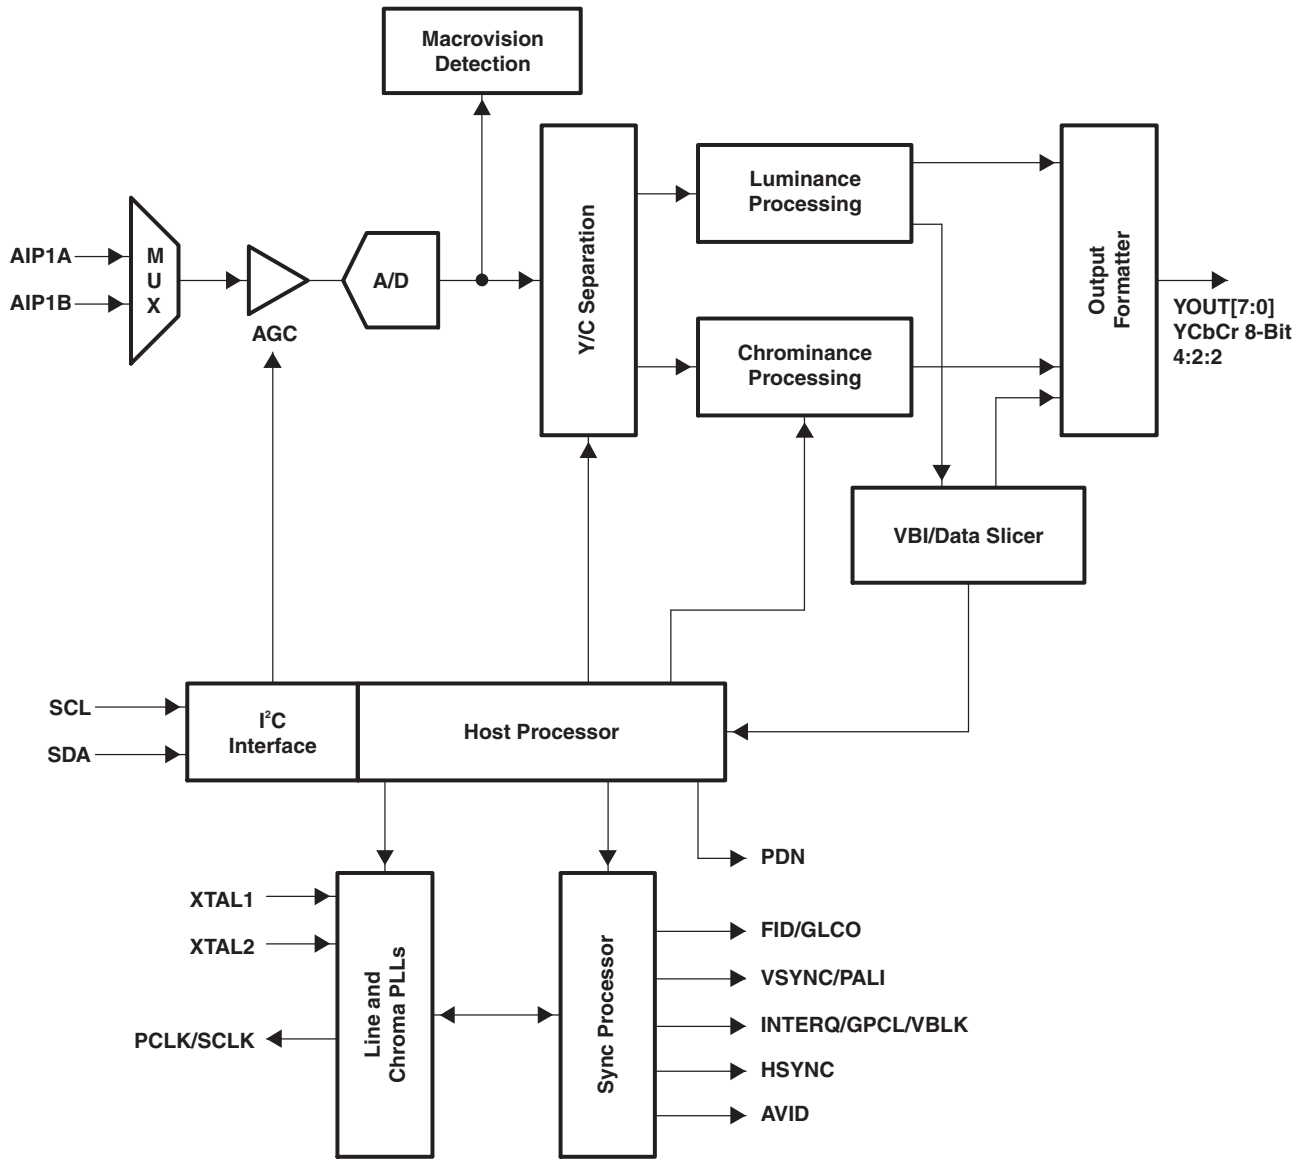


Figure 2-1. Functional Block Diagram

2.7 Terminal Assignments

The TVP5150AM1 video decoder bridge is packaged in a 48-terminal ZQC package or a 32-terminal TQFP package. Figure 2-2 shows the terminal diagrams for both packages. Table 2-1 gives a description of the terminals.

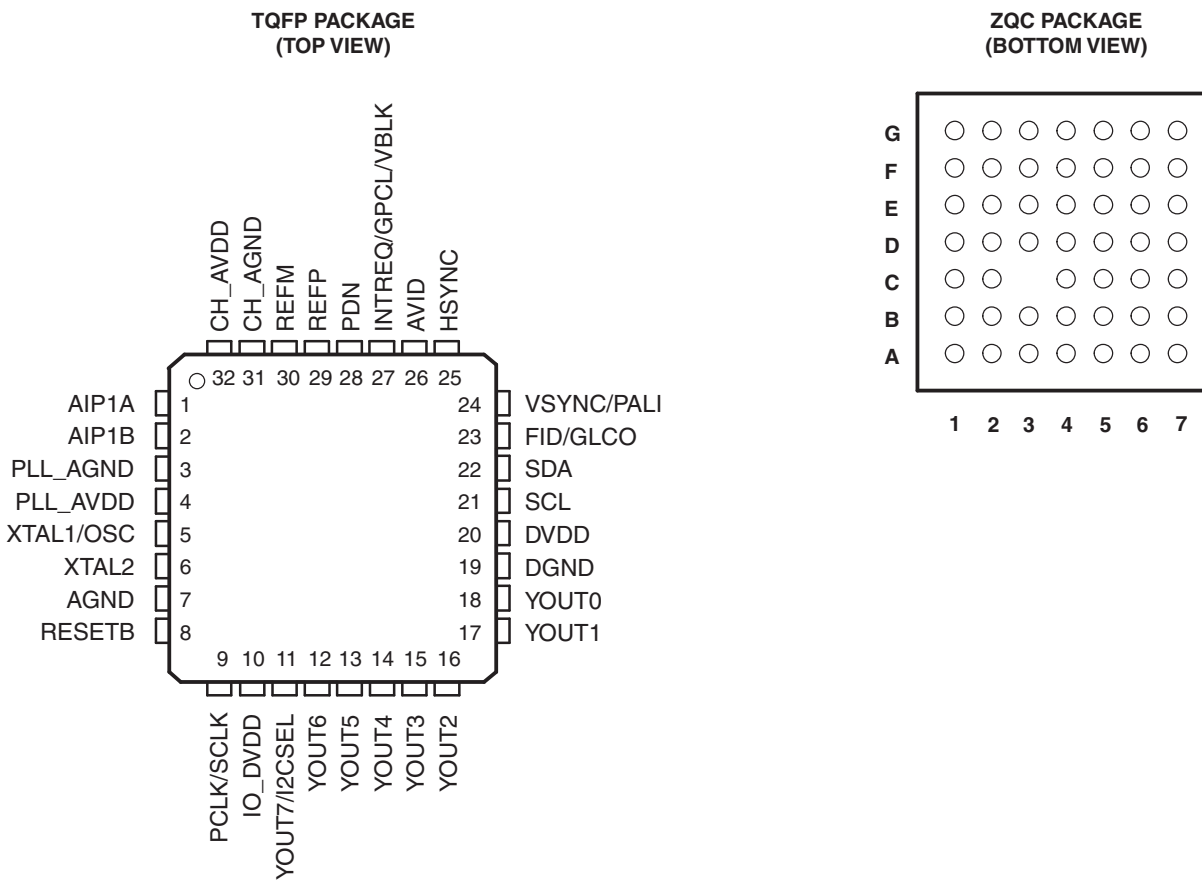


Figure 2-2. Terminal Diagrams

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

Table 2-1. Terminal Functions

| TERMINAL | | | I/O | DESCRIPTION |
|------------------------|---|-----|-----|---|
| NAME | NO. | | | |
| | ZQC | PBS | | |
| Analog Section | | | | |
| AGND | E1 | 7 | I | Substrate. Connect to analog ground. |
| AIP1A | A1 | 1 | I | Analog input. Connect to the video analog input via 0.1- μ F capacitor. The maximum input range is 0-0.75 V_{PP} , and may require an attenuator to reduce the input amplitude to the desired level. If not used, connect to AGND via a 0.1- μ F capacitor (see Figure 6-1). |
| AIP1B | B1 | 2 | I | Analog input. Connect to the video analog input via 0.1- μ F capacitor. The maximum input range is 0-0.75 V_{PP} , and may require an attenuator to reduce the input amplitude to the desired level. If not used, connect to AGND via a 0.1- μ F capacitor (see Figure 6-1). |
| CH_AGND | A3 | 31 | I | Analog ground |
| CH_AVDD | A2 | 32 | I | Analog supply. Connect to 1.8-V analog supply. |
| NC | B2, B3, B6, C4, C5, D6, D3 E5, E2 F2, F5, F6 | — | — | No connect |
| PLL_AGND | C2 | 3 | I | PLL ground. Connect to analog ground. |
| PLL_AVDD | C1 | 4 | I | PLL supply. Connect to 1.8-V analog supply. |
| REFM | A4 | 30 | I | A/D reference ground. Connect to analog ground through a 1- μ F capacitor. Also, it is recommended to connect directly to REFP through a 1- μ F capacitor (see Figure 6-1). |
| REFP | B4 | 29 | I | A/D reference supply. Connect to analog ground through a 1- μ F capacitor (see Figure 6-1). |
| Digital Section | | | | |
| AVID | A6 | 26 | O | Active video indicator. This signal is high during the horizontal active time of the video output. AVID toggling during vertical blanking intervals is controlled by bit 2 of the active video cropping start pixel LSB register at address 12h (see Section 3.20.17). |
| DGND | E6 | 19 | I | Digital ground |
| DVDD | E7 | 20 | I | Digital supply. Connect to 1.8-V digital supply. |
| FID/GLCO | C6 | 23 | O | FID: Odd/even field indicator or vertical lock indicator. For the odd/even indicator, a 1 indicates the odd field. GLCO: This serial output carries color PLL information. A slave device can decode the information to allow chroma frequency control from the TVP5150AM1 decoder. Data is transmitted at the SCLK rate in Genlock mode. In RTC mode, SCLK/4 is used. |
| HSYNC | A7 | 25 | O | Horizontal synchronization |
| INTREQ/GPCL/ VBLK | B5 | 27 | I/O | INTREQ: Interrupt request output GPCL/VBLK: General-purpose control logic. This terminal has two functions: <ul style="list-style-type: none"> GPCL: General-purpose output. In this mode the state of GPCL is directly programmed via I²C. VBLK: Vertical blank output. In this mode the GPCL terminal indicates the vertical blanking interval of the output video. The beginning and end times of this signal are programmable via I²C. |
| IO_DVDD | G2 | 10 | I | Digital supply. Connect to 3.3 V. |
| PCLK/SCLK | G1 | 9 | O | System clock at either 1 \times or 2 \times the frequency of the pixel clock. |
| PDN | A5 | 28 | I | Power-down terminal (active low). Puts the decoder in standby mode. Preserves the value of the registers. |
| RESETB | F1 | 8 | I | Active-low reset. RESETB can be used only when PDN = 1. When RESETB is pulled low, it resets all the registers and restarts the internal microprocessor. |
| SCL | D7 | 21 | I/O | I ² C serial clock (open drain) |
| SDA | C7 | 22 | I/O | I ² C serial data (open drain) |

Table 2-1. Terminal Functions (continued)

| TERMINAL | | | I/O | DESCRIPTION |
|---------------------------|--|--|-----|---|
| NAME | NO. | | | |
| | ZQC | PBS | | |
| VSYNC/PALI | B7 | 24 | O | VSYNC: Vertical synchronization signal PALI: PAL line indicator or horizontal lock indicator. For the PAL line indicator: 1 = Noninverted line 0 = Inverted line |
| XTAL1/OSC XTAL2 | D2 D1 | 5 6 | I/O | External clock reference. The user may connect XTAL1 to an oscillator or to one terminal of a crystal oscillator. The user may connect XTAL2 to the other terminal of the crystal oscillator or not connect XTAL2 at all. One single 14.31818-MHz crystal or oscillator is needed for ITU-R BT.601 sampling for all supported standards. |
| YOUT[6:0] | G3 F4 G4 G5 G6 G7 F7 | 12 13 14 15 16 17 18 | I/O | Output decoded ITU-R BT.656 output/YCbCr 4:2:2 output with discrete sync |
| YOUT7/I ² CSEL | F3 | 11 | I/O | I ² CSEL: Determines address for I ² C (sampled during reset). A pullup or pulldown register is needed (>1 k Ω) to program the terminal to the desired address. 1 = Address is 0xBA 0 = Address is 0xB8 YOUT7: Most-significant bit (MSB) of output decoded ITU-R BT.656 output/YCbCr 4:2:2 output |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3 Functional Description

3.1 Analog Front End

The TVP5150AM1 decoder has an analog input channel that accepts two video inputs that are ac-coupled. The decoder supports a maximum input voltage range of 0.75 V; therefore, an attenuation of one-half is needed for most input signals with a peak-to-peak variation of 1.5 V. The maximum parallel termination before the input to the device is 75 Ω . See the application diagram in [Figure 6-1](#) for the recommended configuration. The two analog input ports can be connected as follows:

- Two selectable composite video inputs or
- One S-video input

An internal clamping circuit restores the ac-coupled video signal to a fixed dc level.

The programmable gain amplifier (PGA) and the automatic gain control (AGC) circuit work together to make sure that the input signal is amplified sufficiently to ensure the proper input range for the ADC.

The ADC has nine bits of resolution and runs at a maximum speed of 27 MHz. The clock input for the ADC comes from the PLL.

3.2 Composite Processing Block Diagram

The composite processing block processes NTSC/PAL/SECAM signals into the YCbCr color space. [Figure 3-1](#) shows the basic architecture of this processing block.

[Figure 3-1](#) shows the luminance/chrominance (Y/C) separation process in the TVP5150AM1 decoder. The composite video is multiplied by subcarrier signals in the quadrature modulator to generate the color difference signals Cb and Cr. Cb and Cr are then low pass (LP) filtered to achieve the desired bandwidth and to reduce crosstalk.

An adaptive four-line comb filter separates CbCr from Y. Chroma is remodulated through another quadrature modulator and subtracted from the line-delayed composite video to generate luma. Contrast, brightness, hue, saturation, and sharpness (using the peaking filter) are programmable via I²C.

The Y/C separation is bypassed for S-video input. For S-video, the remodulation path is disabled.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

3.5 Luminance Processing

The luma component is derived from the composite signal by subtracting the remodulated chroma information. A line delay exists in this path to compensate for the line delay in the adaptive comb filter in the color processing chain. The luma information is then fed into the peaking circuit, which enhances the high frequency components of the signal, thus improving sharpness.

3.6 Chrominance Processing

For NTSC/PAL formats, the color processing begins with a quadrature demodulator. The Cb/Cr signals then pass through the gain control stage for chroma saturation adjustment. An adaptive comb filter is applied to the demodulated signals to separate chrominance and eliminate cross-chrominance artifacts. An automatic color killer circuit is also included in this block. The color killer suppresses the chroma processing when the color burst of the video signal is weak or not present. The SECAM standard is similar to PAL except for the modulation of color which is FM instead of QAM.

3.7 Timing Processor

The timing processor is a combination of hardware and software running in the internal microprocessor that serves to control horizontal lock to the input sync pulse edge, AGC and offset adjustment in the analog front end, vertical sync detection, and Macrovision detection.

3.8 VBI Data Processor (VDP)

The TVP5150AM1 VDP slices various data services such as teletext (WST, NABTS), closed caption (CC), wide screen signaling (WSS), etc. These services are acquired by programming the VDP to enable standards in the VBI. The results are stored in a FIFO and/or registers. The teletext results are stored only in a FIFO. [Table 3-1](#) lists a summary of the types of VBI data supported according to the video standard. It supports ITU-R BT. 601 sampling for each.

Table 3-1. Data Types Supported by VDP

| LINE MODE REGISTER FEh) (D0h | BITS [3:0] | NAME | DESCRIPTION |
|---------------------------------|------------|---------------|----------------------------------|
| | 0000b | WST SECAM | Teletext, SECAM |
| | 0001b | WST PAL B | Teletext, PAL, System B |
| | 0010b | WST PAL C | Teletext, PAL, System C |
| | 0011b | WST, NTSC B | Teletext, NTSC, System B |
| | 0100b | NABTS, NTSC C | Teletext, NTSC, System C |
| | 0101b | NABTS, NTSC D | Teletext, NTSC, System D (Japan) |
| | 0110b | CC, PAL | Closed caption PAL |
| | 0111b | CC, NTSC | Closed caption NTSC |
| | 1000b | WSS, PAL | Wide-screen signal, PAL |
| | 1001b | WSS, NTSC | Wide-screen signal, NTSC |
| | 1010b | VITC, PAL | Vertical interval timecode, PAL |
| | 1011b | VITC, NTSC | Vertical interval timecode, NTSC |
| | 1100b | VPS, PAL 6 | Video program system, PAL |
| | 1101b | Reserved | Reserved |
| | 1110b | Reserved | Reserved |
| | 1111b | Active Video | Active video/full field |

At power-up the host interface is required to program the VDP-configuration RAM (VDP-CRAM) contents with the lookup table (see [Section 3.20.58](#)). This is done through port address C3h. Each read from or write to this address auto increments an internal counter to the next RAM location. To access the VDP-CRAM, the line mode registers (D0h to FCh) must be programmed with FFh to avoid a conflict with the internal microprocessor and the VDP in both writing and reading. Full field mode must also be disabled.

Available VBI lines are from line 6 to line 27 of both field 1 and field 2. Each line can be any VBI mode.

Output data is available either through the VBI-FIFO (B0h) or through dedicated registers at 90h to AFh, both of which are available through the I²C port.

3.9 VBI FIFO and Ancillary Data in Video Stream

Sliced VBI data can be output as ancillary data in the video stream in the ITU-R BT.656 mode. VBI data is output during the horizontal blanking period following the line from which the data was retrieved. [Table 3-2](#) shows the header format and sequence of the ancillary data inserted into the video stream. This format is also used to store any VBI data into the FIFO. The size of FIFO is 512 bytes. Therefore, the FIFO can store up to 11 lines of teletext data with the NTSC NABTS standard.

Table 3-2. Ancillary Data Format and Sequence

| BYTE NO. | D7 (MSB) | D6 | D5 | D4 | D3 | D2 | D1 | D0 (LSB) | DESCRIPTION | |
|-----------|------------------|----|---------|------------|---------|---------|------------------|----------|----------------------------|----------------------|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Ancillary data preamble | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 3 | NEP | EP | 0 | 1 | 0 | DID2 | DID1 | DID0 | Data ID (DID) | |
| 4 | NEP | EP | F5 | F4 | F3 | F2 | F1 | F0 | Secondary data ID (SDID) | |
| 5 | NEP | EP | N5 | N4 | N3 | N2 | N1 | N0 | Number of 32-bit data (NN) | |
| 6 | Video line [7:0] | | | | | | | | Internal data ID0 (IDID0) | |
| 7 | 0 | 0 | 0 | Data error | Match 1 | Match 2 | Video line [9:8] | | Internal data ID1 (IDID1) | |
| 8 | 1. Data | | | | | | | | Data byte | First word |
| 9 | 2. Data | | | | | | | | Data byte | |
| 10 | 3. Data | | | | | | | | Data byte | |
| 11 | 4. Data | | | | | | | | Data byte | |
| : | : | | | | | | | | : | |
| | 1– m Data | | | | | | | | Data byte | N th word |
| | m. Data | | | | | | | | Data byte | |
| | RSVD | | CS[5:0] | | | | | | Check sum | |
| 1– 4(N+2) | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Fill byte | |

EP: Even parity for D0

NEP: Negated even parity

DID: 91h: Sliced data of VBI lines of first field

53h: Sliced data of line 24 to end of first field

55h: Sliced data of VBI lines of second field

97h: Sliced data of line 24 to end of second field

SDID: This field holds the data format taken from the line mode register of the corresponding line.

NN: Number of Dwords beginning with byte 8 through 4(N+2). This value is the number of Dwords where each Dword is 4 bytes.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

| | |
|------------|--|
| IDID0: | Transaction video line number [7:0] |
| IDID1: | Bit 0/1 = Transaction video line number [9:8] Bit 2 = Match 2 flag Bit 3 = Match 1 flag Bit 4 = 1 if an error was detected in the EDC block; 0 if not |
| CS: | Sum of D0 of DID through last data byte. |
| Fill byte: | Fill bytes make a multiple of 4 bytes from byte 0 to last fill byte. For teletext modes, byte 8 is the sync pattern byte. Byte 9 is 1. Data (the first data byte). |

3.10 Raw Video Data Output

The TVP5150AM1 decoder can output raw A/D video data at 2x sampling rate for external VBI slicing. This is transmitted as an ancillary data block during the active horizontal portion of the line and during vertical blanking.

3.11 Output Formatter

The YCbCr digital output can be programmed as 8-bit 4:2:2 or 8-bit ITU-R BT.656 parallel interface standard.

Table 3-3. Summary of Line Frequencies, Data Rates, and Pixel Counts


| STANDARDS | HORIZONTAL LINE RATE (kHz) | PIXELS PER LINE | ACTIVE PIXELS PER LINE | SCLK FREQUENCY (MHz) |
|-----------------------------------|----------------------------|-----------------|------------------------|----------------------|
| NTSC (M, 4.43), ITU-R BT.601 | 15.73426 | 858 | 720 | 27.00 |
| PAL (B, D, G, H, I), ITU-R BT.601 | 15.625 | 864 | 720 | 27.00 |
| PAL (M), ITU-R BT.601 | 15.73426 | 858 | 720 | 27.00 |
| PAL (N), ITU-R BT.601 | 15.625 | 864 | 720 | 27.00 |
| SECAM, ITU-R BT.601 | 15.625 | 864 | 720 | 27.00 |

3.12 Synchronization Signals

External (discrete) syncs are provided via the following signals (see [Figure 3-2](#) and [Figure 3-3](#)):

- VSYNC (vertical sync)
- FID/VLK (field indicator or vertical lock indicator)
- GPCL/VBLK (general-purpose I/O or vertical blanking indicator)
- PALI/HLK (PAL switch indicator or horizontal lock indicator)
- HSYNC (horizontal sync)
- AVID (active video indicator)

VSYNC, FID, PALI, and VBLK are software set and programmable to the SCLK pixel count. This allows any possible alignment to the internal pixel count and line count. The default settings for a 525-/625-line video output are given as an example.

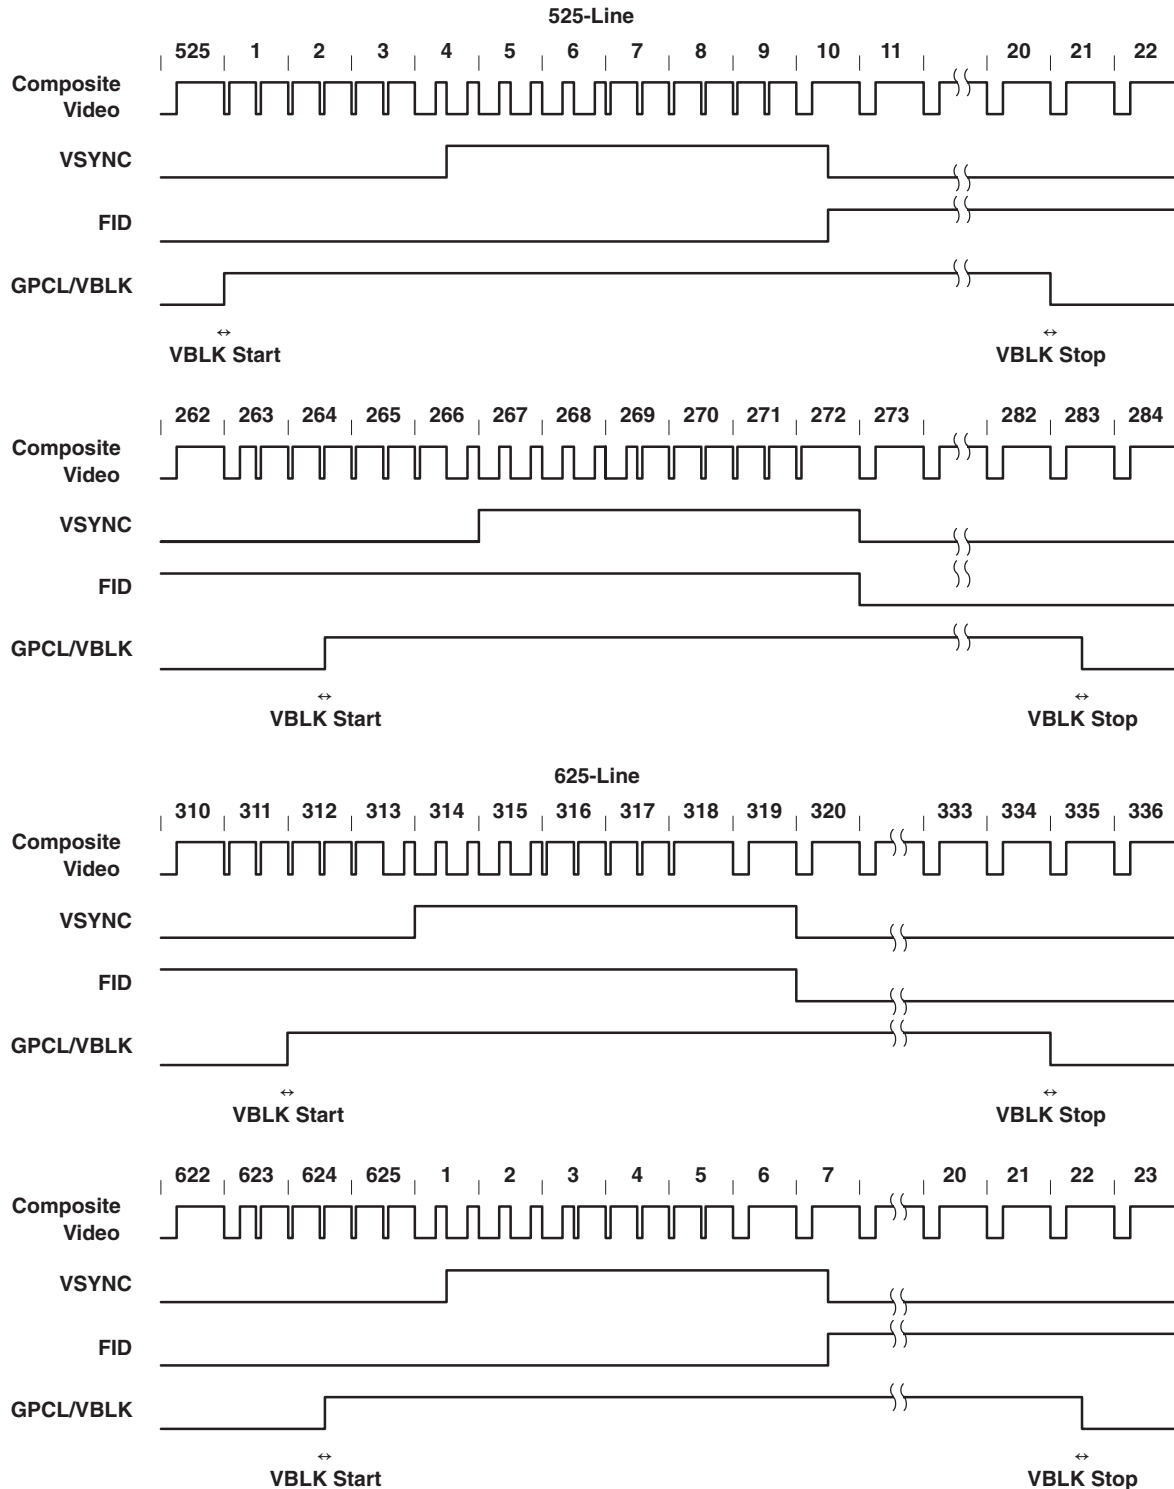

A. Line numbering conforms to ITU-R BT.470.


Figure 3-2. 8-Bit 4:2:2, Timing With 2× Pixel Clock (SCLK) Reference

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

ITU-R BT.656 Timing

| | | | | | | | | | | | | | | | | | | | | | | |
|--------------------|-----------|----------|-----------|----------|------|------|-----|------|------|-----|------|------|-----|------|------|------|------|------|---------|--------|---------|--------|
| NTSC 601 | 1436 | 1437 | 1438 | 1439 | 1440 | 1441 | ... | 1455 | 1456 | ... | 1583 | 1584 | ... | 1711 | 1712 | 1713 | 1714 | 1715 | 0 | 1 | 2 | 3 |
| PAL 601 | 1436 | 1437 | 1438 | 1439 | 1440 | 1441 | ... | 1459 | 1460 | ... | 1587 | 1588 | ... | 1723 | 1724 | 1725 | 1726 | 1727 | 0 | 1 | 2 | 3 |
| SECAM | 1436 | 1437 | 1438 | 1439 | 1440 | 1441 | ... | 1479 | 1480 | ... | 1607 | 1608 | ... | 1719 | 1720 | 1721 | 1722 | 1723 | 1724 | 1725 | 1726 | 1727 |
| ITU 656 Datastream | Cb 359 | Y 718 | Cr 359 | Y 719 | FF | 00 | ... | 10 | 80 | ... | 10 | 80 | ... | 10 | FF | 00 | 00 | XX | Cb 0 | Y 0 | Cr 0 | Y 1 |

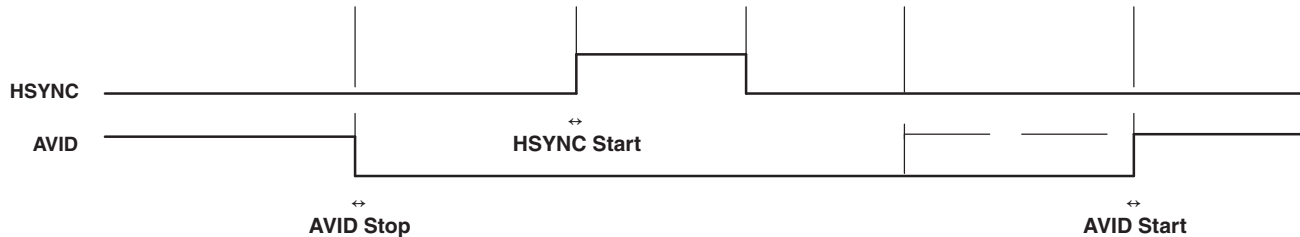

A. AVID rising edge occurs four SCLK cycles early when in the ITU-R BT.656 output mode.

Figure 3-3. Horizontal Synchronization Signals

3.13 Active Video (AVID) Cropping

AVID cropping provides a means to decrease bandwidth of the video output. This is accomplished by horizontally blanking a number of AVID pulses and by vertically blanking a number of lines per frame. The horizontal AVID cropping is controlled using registers 11h and 12h for start pixels MSB and LSB, respectively.

Registers 13h and 14h provide access to stop pixels MSB and LSB, respectively. The vertical AVID cropping is controlled using the vertical blanking (VBLK) start and stop registers at addresses 18h and 19h. [Figure 3-4](#) shows an AVID application.

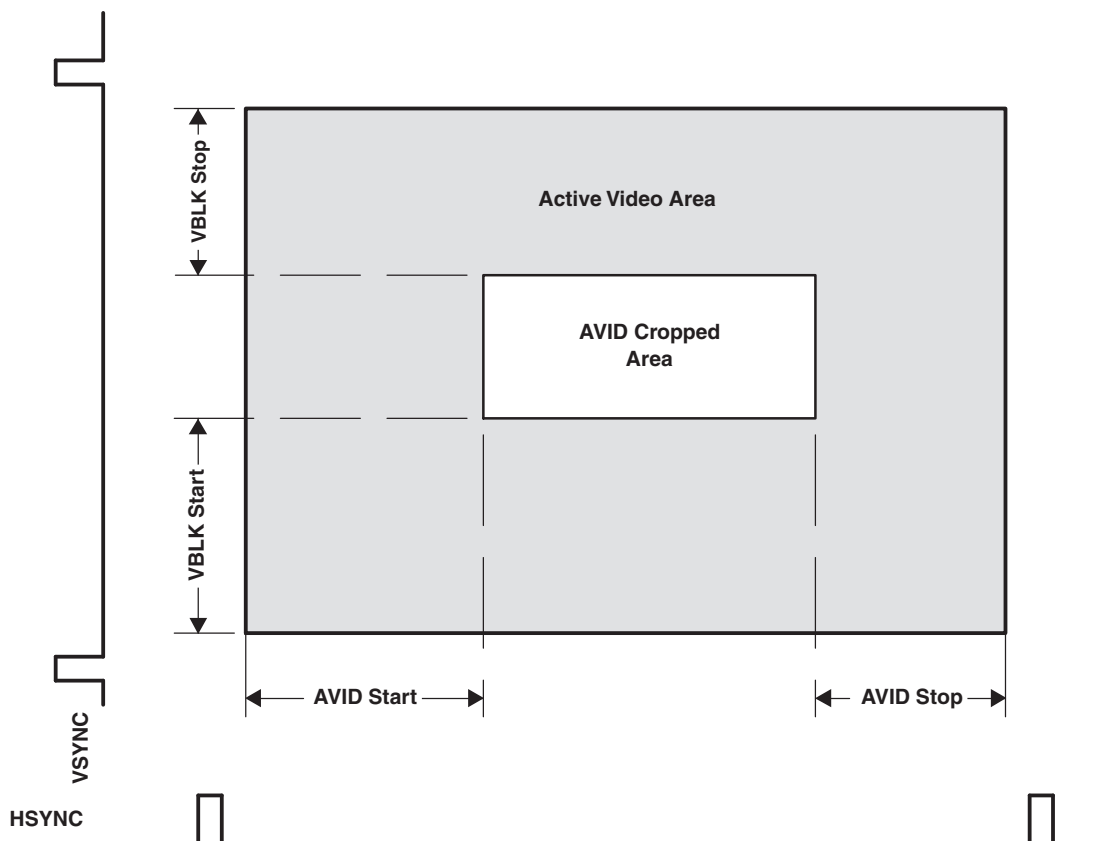


Figure 3-4. AVID Application

3.14 Embedded Syncs

Standards with embedded syncs insert SAV and EAV codes into the datastream at the beginning and end of horizontal blanking. These codes contain the V and F bits that also define vertical timing. F and V change on EAV. Table 3-4 gives the format of the SAV and EAV codes.

H equals 1 always indicates EAV. H equals 0 always indicates SAV. The alignment of V and F to the line and field counter varies depending on the standard. See ITU-R BT.656 for more information on embedded syncs.

The P bits are protection bits:

$$P3 = V \text{ xor } H$$

$$P2 = F \text{ xor } H$$

$$P1 = F \text{ xor } V$$

$$P0 = F \text{ xor } V \text{ xor } H$$

Table 3-4. EAV and SAV Sequence

| | 8-BIT DATA | | | | | | | |
|-------------|------------|----|----|----|----|----|----|----|
| | D7 (MSB) | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Preamble | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Preamble | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Preamble | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Status word | 1 | F | V | H | P3 | P2 | P1 | P0 |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

3.15 I²C Host Interface

The I²C standard consists of two signals, serial input/output data line (SDA) and input/output clock line (SCL), which carry information between the devices connected to the bus. A third signal (I2CSEL) is used for slave address selection. Although the I²C system can be multimastered, the TVP5150AM1 decoder functions only as a slave device.

Both SDA and SCL must be connected to a positive supply voltage via a pullup resistor. When the bus is free, both lines are high. The slave address select terminal (I2CSEL) enables the use of two TVP5150AM1 decoders tied to the same I²C bus. At power up, the status of the I2CSEL is polled. Depending on the write and read addresses to be used for the TVP5150AM1 decoder, it can either be pulled low or high through a resistor. This terminal is multiplexed with YOUT7 and hence must not be tied directly to ground or IO_DVDD. [Table 3-6](#) summarizes the terminal functions of the I²C-mode host interface.

Table 3-5. Write Address Selection

| I2CSEL | WRITE ADDRESS |
|--------|---------------|
| 0 | B8h |
| 1 | BAh |

Table 3-6. I²C Terminal Description

| SIGNAL | TYPE | DESCRIPTION |
|----------------|------------------|-------------------------|
| I2CSEL (YOUT7) | I | Slave address selection |
| SCL | I/O (open drain) | Input/output clock line |
| SDA | I/O (open drain) | Input/output data line |

Data transfer rate on the bus is up to 400 kbit/s. The number of interfaces connected to the bus is dependent on the bus capacitance limit of 400 pF. The data on the SDA line must be stable during the high period of the SCL except for start and stop conditions. The high or low state of the data line can only change with the clock signal on the SCL line being low. A high-to-low transition on the SDA line while the SCL is high indicates an I²C start condition. A low-to-high transition on the SDA line while the SCL is high indicates an I²C stop condition.

Every byte placed on the SDA must be eight bits long. The number of bytes which can be transferred is unrestricted. Each byte must be followed by an acknowledge bit. The acknowledge-related clock pulse is generated by the I²C master.

3.15.1 I²C Write Operation

Data transfers occur utilizing the following illustrated formats.

An I²C master initiates a write operation to the TVP5150AM1 decoder by generating a start condition (S) followed by the TVP5150AM1 I²C address (see the following illustration), in MSB first bit order, followed by a 0 to indicate a write cycle. After receiving an acknowledge from the TVP5150AM1 decoder, the master presents the subaddress of the register, or the first of a block of registers it wants to write, followed by one or more bytes of data, MSB first. The TVP5150AM1 decoder acknowledges each byte after completion of each transfer. The I²C master terminates the write operation by generating a stop condition (P).

| | | | | | | | | |
|--|----------|----------|----------|----------|----------|----------|----------|----------|
| Step 1 | 0 | | | | | | | |
| I ² C Start (master) | S | | | | | | | |
| Step 2 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| I ² C General address (master) | 1 | 0 | 1 | 1 | 1 | 0 | X | 0 |
| Step 3 | 9 | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | |
| Step 4 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| I ² C Write register address (master) | Addr | Addr | Addr | Addr | Addr | Addr | Addr | Addr |
| Step 5 | 9 | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | |
| Step 6 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| I ² C Write data (master) | Data | Data | Data | Data | Data | Data | Data | Data |
| Step 7⁽¹⁾ | 9 | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | |
| Step 8 | 0 | | | | | | | |
| I ² C Stop (master) | P | | | | | | | |

(1) Repeat steps 6 and 7 until all data have been written.

3.15.2 I²C Read Operation

The read operation consists of two phases. The first phase is the address phase. In this phase, an I²C master initiates a write operation to the TVP5150AM1 decoder by generating a start condition (S) followed by the TVP5150AM1 I²C address, in MSB first bit order, followed by a 0 to indicate a write cycle. After receiving acknowledges from the TVP5150AM1 decoder, the master presents the subaddress of the register or the first of a block of registers it wants to read. After the cycle is acknowledged, the master terminates the cycle immediately by generating a stop condition (P).

Table 3-7. Read Address Selection

| I2CSEL | READ ADDRESS |
|--------|--------------|
| 0 | B9h |
| 1 | BBh |

The second phase is the data phase. In this phase, an I²C master initiates a read operation to the TVP5150AM1 decoder by generating a start condition followed by the TVP5150AM1 I²C address (see the following illustration of a read operation), in MSB first bit order, followed by a 1 to indicate a read cycle. After an acknowledge from the TVP5150AM1 decoder, the I²C master receives one or more bytes of data from the TVP5150AM1 decoder. The I²C master acknowledges the transfer at the end of each byte. After the last data byte desired has been transferred from the TVP5150AM1 decoder to the master, the master generates a not acknowledge followed by a stop.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.15.2.1 Read Phase 1

| | | | | | | | | | |
|--|----------|----------|----------|----------|----------|----------|----------|----------|------|
| Step 1 | 0 | | | | | | | | |
| I ² C Start (master) | S | | | | | | | | |
| Step 2 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| I ² C General address (master) | 1 | 0 | 1 | 1 | 1 | 0 | X | 0 | |
| Step 3 | 9 | | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | | |
| Step 4 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| I ² C Write register address (master) | Addr | Addr | Addr | Addr | Addr | Addr | Addr | Addr | Addr |
| Step 5 | 9 | | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | | |
| Step 6 | 0 | | | | | | | | |
| I ² C Stop (master) | P | | | | | | | | |

3.15.2.2 Read Phase 2

| | | | | | | | | | |
|---|-----------|----------|----------|----------|----------|----------|----------|----------|------|
| Step 7 | 0 | | | | | | | | |
| I ² C Start (master) | S | | | | | | | | |
| Step 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| I ² C General address (master) | 1 | 0 | 1 | 1 | 1 | 0 | X | 1 | |
| Step 9 | 9 | | | | | | | | |
| I ² C Acknowledge (slave) | A | | | | | | | | |
| Step 10 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| I ² C Read data (slave) | Data | Data | Data | Data | Data | Data | Data | Data | Data |
| Step 11⁽¹⁾ | 9 | | | | | | | | |
| I ² C Not Acknowledge (master) | \bar{A} | | | | | | | | |
| Step 12 | 0 | | | | | | | | |
| I ² C Stop (master) | P | | | | | | | | |

(1) Repeat steps 10 and 11 for all bytes read. Master does not acknowledge the last read data received.

3.15.2.3 I²C Timing Requirements

The TVP5150AM1 decoder requires delays in the I²C accesses to accommodate its internal processor's timing. In accordance with I²C specifications, the TVP5150AM1 decoder holds the I²C clock line (SCL) low to indicate the wait period to the I²C master. If the I²C master is not designed to check for the I²C clock line held-low condition, then the maximum delays must always be inserted where required. These delays are of variable length; maximum delays are indicated in the following diagram:

Normal register writing addresses 00h to 8Fh (addresses 90h to FFh do not require delays).




The 64-μs delay is for all registers that do not require a reinitialization. Delays may be more for some registers.

3.16 Clock Circuits

An internal line-locked PLL generates the system and pixel clocks. A 14.31818-MHz clock is required to drive the PLL. This may be input to the TVP5150AM1 decoder on terminal 5 (XTAL1), or a crystal of 14.31818-MHz fundamental resonant frequency may be connected across terminals 5 and 6 (XTAL2). [Figure 3-5](#) shows the reference clock configurations. For the example crystal circuit shown (a parallel-resonant crystal with 14.31818-MHz fundamental frequency), the external capacitors must have the following relationship:

$$C_{L1} = C_{L2} = 2C_L - C_{STRAY}$$

where C_{STRAY} is the terminal capacitance with respect to ground. [Figure 3-5](#) shows the reference clock configurations.

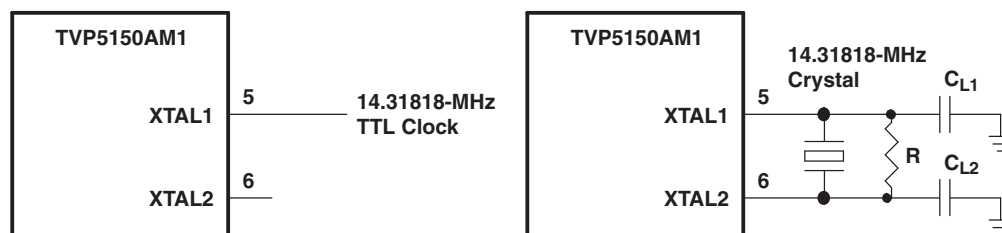

A. R depends on crystal specification and may not be required.

Figure 3-5. Reference Clock Configurations

3.17 Genlock Control (GLCO) and RTC

A Genlock control function is provided to support a standard video encoder to synchronize its internal color oscillator for properly reproduced color with unstable timebase sources such as VCRs.

The frequency control word of the internal color subcarrier digital control oscillator (DTO) and the subcarrier phase reset bit are transmitted via terminal 23 (GLCO). The frequency control word is a 23-bit binary number. The frequency of the DTO can be calculated from the following equation:

$$F_{dto} = (F_{ctrl}/2^{23}) \times F_{sclk}$$

where F_{dto} is the frequency of the DTO, F_{ctrl} is the 23-bit DTO frequency control, and F_{sclk} is the frequency of the SCLK.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

3.17.1 GLCO Interface

A write of 1 to bit 4 of the chrominance control register at I²C subaddress 1Ah causes the subcarrier DCO phase reset bit to be sent on the next scan line on GLCO. The active-low reset bit occurs seven SCLKs after the transmission of the last bit of DCO frequency control. Upon the transmission of the reset bit, the phase of the TVP5150AM1 internal subcarrier DCO is reset to zero.

A Genlock slave device can be connected to the GLCO terminal and uses the information on GLCO to synchronize its internal color phase DCO to achieve clean line and color lock.

Figure 3-6 shows the timing diagram of the GLCO mode.

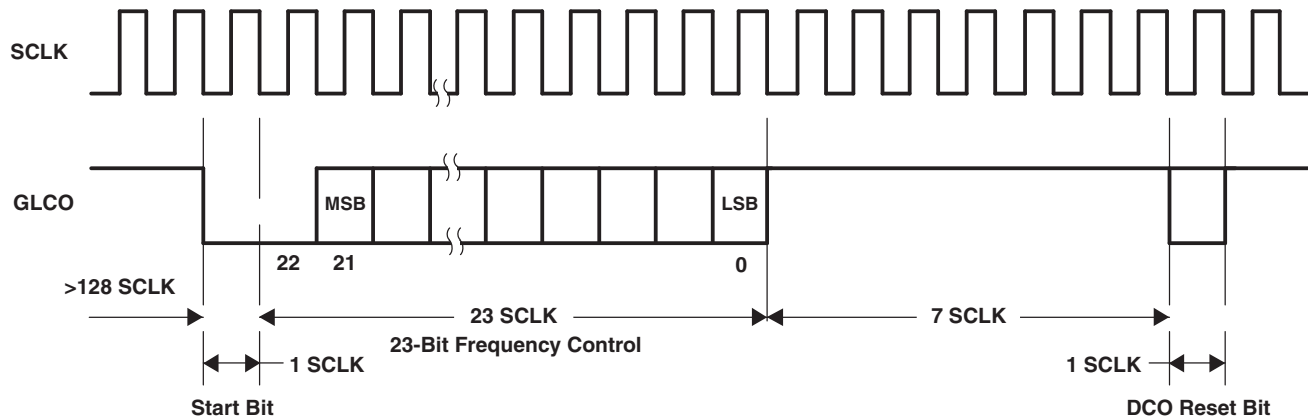


Figure 3-6. GLCO Timing

3.17.2 RTC Mode

Figure 3-7 shows the timing diagram of the RTC mode. Clock rate for the RTC mode is four times slower than the GLCO clock rate. For PLL frequency control, the upper 22 bits are used. Each frequency control bit is two clock cycles long. The active-low reset bit occurs six CLKs after the transmission of the last bit of PLL frequency control.

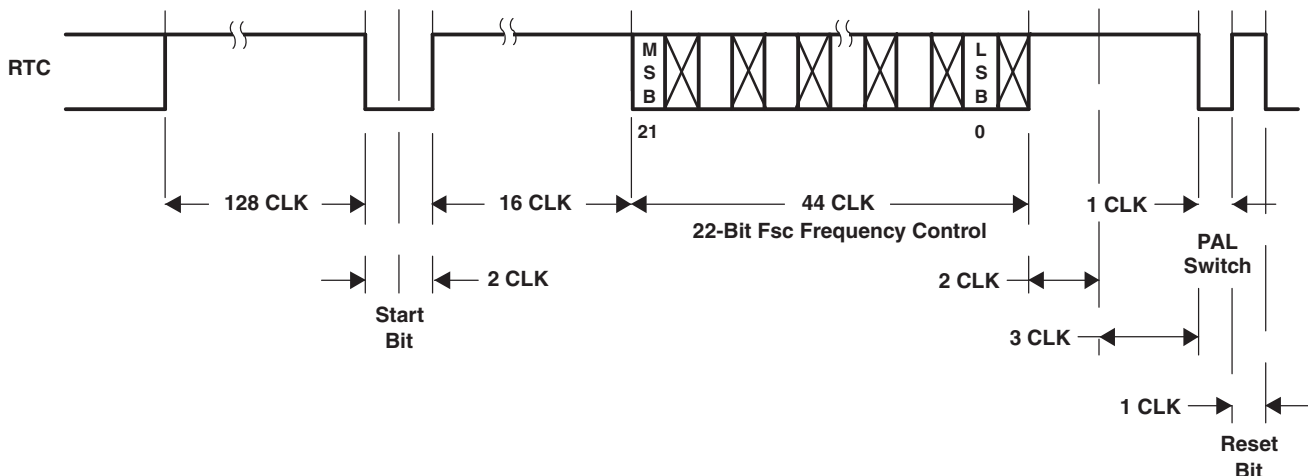


Figure 3-7. RTC Timing

3.18 Reset and Power Down

Terminals 8 (RESETB) and 28 (PDN) work together to put the TVP5150AM1 decoder into one of the two modes. [Table 3-8](#) shows the configuration.

After power-up, the device is in an unknown state with its outputs undefined, until it receives a RESETB active low for at least 500 ns. The power supplies must be active and stable for 20 ms before RESETB becomes inactive.

Table 3-8. Reset and Power-Down Modes

| PDN | RESETB | CONFIGURATION |
|-----|--------|--------------------------|
| 0 | 0 | Reserved (unknown state) |
| 0 | 1 | Powers down the decoder |
| 1 | 0 | Resets the decoder |
| 1 | 1 | Normal operation |

3.19 Internal Control Registers

The TVP5150AM1 decoder is initialized and controlled by a set of internal registers that set all device operating parameters. Communication between the external controller and the TVP5150AM1 decoder is through I²C. [Table 3-9](#) shows the summary of these registers. The reserved registers must not be written. Reserved bits in the defined registers must be written with zeros, unless otherwise noted. The detailed programming information of each register is described in the following sections.

Table 3-9. Register Summary

| REGISTER | ADDRESS | DEFAULT | R/W ⁽¹⁾ |
|---------------------------------------|---------|---------|--------------------|
| Video input source selection #1 | 00h | 00h | R/W |
| Analog channel controls | 01h | 15h | R/W |
| Operation mode controls | 02h | 00h | R/W |
| Miscellaneous controls | 03h | 01h | R/W |
| Autoswitch mask | 04h | DCh | R/W |
| Reserved | 05h | 00h | R/W |
| Color killer threshold control | 06h | 10h | R/W |
| Luminance processing control #1 | 07h | 60h | R/W |
| Luminance processing control #2 | 08h | 00h | R/W |
| Brightness control | 09h | 80h | R/W |
| Color saturation control | 0Ah | 80h | R/W |
| Hue control | 0Bh | 00h | R/W |
| Contrast control | 0Ch | 80h | R/W |
| Outputs and data rates select | 0Dh | 47h | R/W |
| Luminance processing control #3 | 0Eh | 00h | R/W |
| Configuration shared pins | 0Fh | 08h | R/W |
| Reserved | 10h | | |
| Active video cropping start pixel MSB | 11h | 00h | R/W |
| Active video cropping start pixel LSB | 12h | 00h | R/W |
| Active video cropping stop pixel MSB | 13h | 00h | R/W |
| Active video cropping stop pixel LSB | 14h | 00h | R/W |
| Genlock and RTC | 15h | 01h | R/W |
| Horizontal sync start | 16h | 80h | R/W |
| Reserved | 17h | | |

(1) R = Read only, W = Write only, R/W = Read and write

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

Table 3-9. Register Summary (continued)

| REGISTER | ADDRESS | DEFAULT | R/W ⁽¹⁾ |
|---|----------|---------|--------------------|
| Vertical blanking start | 18h | 00h | R/W |
| Vertical blanking stop | 19h | 00h | R/W |
| Chrominance control #1 | 1Ah | 0Ch | R/W |
| Chrominance control #2 | 1Bh | 14h | R/W |
| Interrupt reset register B | 1Ch | 00h | R/W |
| Interrupt enable register B | 1Dh | 00h | R/W |
| Interrupt configuration register B | 1Eh | 00h | R/W |
| Reserved | 27h 1Fh | | |
| Video standard | 28h | 00h | R/W |
| Reserved | 2Bh 29h | | |
| Cb gain factor | 2Ch | | R |
| Cr gain factor | 2Dh | | R |
| Macrovision on counter | 2Eh | 0Fh | R/W |
| Macrovision off counter | 2Fh | 01h | R/W |
| 656 revision select | 30h | 00h | R/W |
| Reserved | 7Fh 31h | | |
| MSB of device ID | 80h | 51h | R |
| LSB of device ID | 81h | 50h | R |
| ROM major version | 82h | 04h | R |
| ROM minor version | 83h | 00h | R |
| Vertical line count MSB | 84h | | R |
| Vertical line count LSB | 85h | | R |
| Interrupt status register B | 86h | | R |
| Interrupt active register B | 87h | | R |
| Status register #1 | 88h | | R |
| Status register #2 | 89h | | R |
| Status register #3 | 8Ah | | R |
| Status register #4 | 8Bh | | R |
| Status register #5 | 8Ch | | R |
| Reserved | 8Fh 8Dh | | |
| Closed caption data | 93h 90h | | R |
| WSS data | 99h 94h | | R |
| VPS data | A6h 9Ah | | R |
| VITC data | AFh A7h | | R |
| VBI FIFO read data | B0h | | R |
| Teletext filter and mask 1 | B5h B1h | 00h | R/W |
| Teletext filter and mask 2 | BAh B6h | 00h | R/W |
| Teletext filter control | BBh | 00h | R/W |
| Reserved | BFh BCCh | | |
| Interrupt status register A | C0h | 00h | R/W |
| Interrupt enable register A | C1h | 00h | R/W |
| Interrupt configuration register A | C2h | 04h | R/W |
| VDP configuration RAM data | C3h | DCh | R/W |
| VDP configuration RAM address low byte | C4h | 0Fh | R/W |
| VDP configuration RAM address high byte | C5h | 00h | R/W |
| VDP status | C6h | | R |
| FIFO word count | C7h | | R |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

Table 3-9. Register Summary (continued)

| REGISTER | ADDRESS | DEFAULT | R/W ⁽¹⁾ |
|---------------------------|----------------|------------|--------------------|
| FIFO interrupt threshold | C8h | 80h | R/W |
| FIFO reset | C9h | 00h | W |
| Line number interrupt | CAh | 00h | R/W |
| Pixel alignment low byte | CBh | 4Eh | R/W |
| Pixel alignment high byte | CCh | 00h | R/W |
| FIFO output control | CDh | 01h | R/W |
| Reserved | CEh | | |
| Full field enable | CFh | 00h | R/W |
| Line mode | D0h FBh D1h | 00h FFh | R/W |
| Full field mode | FCh | 7Fh | R/W |
| Reserved | FFh FDh | | |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20 Register Definitions

3.20.1 Video Input Source Selection #1 Register

Address 00h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|--------------|----------|----------------------------|-------------------|
| Reserved | | | | Black output | Reserved | Channel 1 source selection | S-video selection |

Channel 1 source selection

- 0 = AIP1A selected (default)
- 1 = AIP1B selected

Table 3-10. Analog Channel and Video Mode Selection

| | INPUT(S) SELECTED | ADDRESS 00 | |
|-----------|------------------------------|------------|-------|
| | | BIT 1 | BIT 0 |
| Composite | AIP1A (default) | 0 | 0 |
| | AIP1B | 1 | 0 |
| S-Video | AIP1A (luma), AIP1B (chroma) | x | 1 |

Black output

- 0 = Normal operation (default)
- 1 = Force black screen output (outputs synchronized)
 - a. Forced to 10h in normal mode
 - b. Forced to 01h in extended mode

3.20.2 Analog Channel Controls Register

Address 01h
Default 15h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|--------------------------|---|------------------------|---|
| Reserved | | | 1 | Automatic offset control | | Automatic gain control | |

Automatic offset control

- 00 = Disabled
- 01 = Automatic offset enabled (default)
- 10 = Reserved
- 11 = Offset level frozen to the previously set value

Automatic gain control (AGC)

- 00 = Disabled (fixed gain value)
- 01 = AGC enabled (default)
- 10 = Reserved
- 11 = AGC frozen to the previously set value

3.20.3 Operation Mode Controls Register

Address 02h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|------------------------------|-------------|---|--------------------|-----------------------------|-------------------|-----------------|
| Reserved | Color burst reference enable | TV/VCR mode | | White peak disable | Color subcarrier PLL frozen | Luma peak disable | Power-down mode |

Color burst reference enable

- 0 = Color burst reference for AGC disabled (default)
- 1 = Color burst reference for AGC enabled

TV/VCR mode

- 00 = Automatic mode determined by the internal detection circuit (default)
- 01 = Reserved
- 10 = VCR (nonstandard video) mode
- 11 = TV (standard video) mode

With automatic detection enabled, unstable or nonstandard syncs on the input video forces the detector into the VCR mode. This turns off the comb filters and turns on the chroma trap filter.

White peak disable

- 0 = White peak protection enabled (default)
- 1 = White peak protection disabled

Color subcarrier PLL frozen

- 0 = Color subcarrier PLL increments by the internally generated phase increment (default). GLCO pin outputs the frequency increment.
- 1 = Color subcarrier PLL stops operating. GLCO pin outputs the frozen frequency increment.

Luma peak disable

- 0 = Luma peak processing enabled (default)
- 1 = Luma peak processing disabled

Power-down mode

- 0 = Normal operation (default)
- 1 = Power-down mode. A/Ds are turned off and internal clocks are reduced to minimum.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.4 Miscellaneous Controls Register

Address 03h

Default 01h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|----------|--------------------|--------------------|-----------------------------|---|--------------------------|---------------------|
| VBKO | GPCL pin | GPCL output enable | Lock status (HVLK) | YCbCr output enable (TVPOE) | HSYNC, VSYNC/PALI, AVID, FID/GLCO output enable | Vertical blanking on/off | Clock output enable |

VBKO (pin 27) function select

0 = GPCL (default)

1 = VBLK

NOTE

If this pin is not configured as an output, it must not be left floating. A 10-k Ω pull-down resistor is recommended, if not driven externally.

GPCL (data is output based on state of bit 5)

0 = GPCL outputs 0 (default)

1 = GPCL outputs 1

GPCL output enable

0 = GPCL is inactive (default)

1 = GPCL is output

NOTE

GPCL must not be programmed to be 0 when register 0Fh bit 1 is 1 (GPCL/VBLK). If this pin is not configured as an output, it must not be left floating. A 10-k Ω pull-down resistor is recommended, if not driven externally.

Lock status (HVLK) (configured along with register 0Fh, see [Figure 3-8](#) for the relationship between the configuration shared pins)

0 = Terminal VSYNC/PALI outputs the PAL indicator (PALI) signal and terminal FID/GLCO outputs the field ID (FID) signal (default) (if terminals are configured to output PALI and FID in register 0Fh).

1 = Terminal VSYNC/PALI outputs the horizontal lock indicator (HLK) and terminal FID outputs the vertical lock indicator (VLK) (if terminals are configured to output PALI and FID in register 0Fh).

These are additional functions that are provided for ease of use.

YCbCr output enable

0 = YOUT[7:0] high impedance (default)

1 = YOUT[7:0] active

NOTE

The YOUT[6:0] pins must be driven externally or pulled down with a 10-k Ω resistor. YOUT7 must be already pulled high or low for the I²C address select.

HSYNC, VSYNC/PALI, active video indicator (AVID), and FID/GLCO output enables

0 = HSYNC, VSYNC/PALI, AVID, and FID/GLCO are high-impedance (default).

1 = HSYNC, VSYNC/PALI, AVID, and FID/GLCO are active.

NOTE

If these pins are not configured as outputs, then they must not be left floating. 10-k Ω pulldown resistors are recommended, if not driven externally. If the FID/GLCO pin is configured as a GLCO output (default), it is always an output, regardless of the status of this register, and it must not be pulled down or driven externally.

Vertical blanking on/off

0 = Vertical blanking (VBLK) off (default)

1 = Vertical blanking (VBLK) on

Clock output enable

0 = SCLK output is high impedance.

1 = SCLK output is enabled (default).

NOTE

When enabling the outputs, ensure the clock output is not accidentally disabled.

Table 3-11. Digital Output Control⁽¹⁾

| REGISTER 03h, BIT 3 (TVPOE) | REGISTER C2h, BIT 2 (VDPOE) | YCbCr OUTPUT | NOTES |
|--------------------------------|--------------------------------|----------------|--|
| 0 | X | High impedance | After both YCbCr output enable bits are programmed |
| X | 0 | High impedance | After both YCbCr output enable bits are programmed |
| 1 | 1 | Active | After both YCbCr output enable bits are programmed |

(1) VDPOE default is 1, and TVPOE default is 0.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

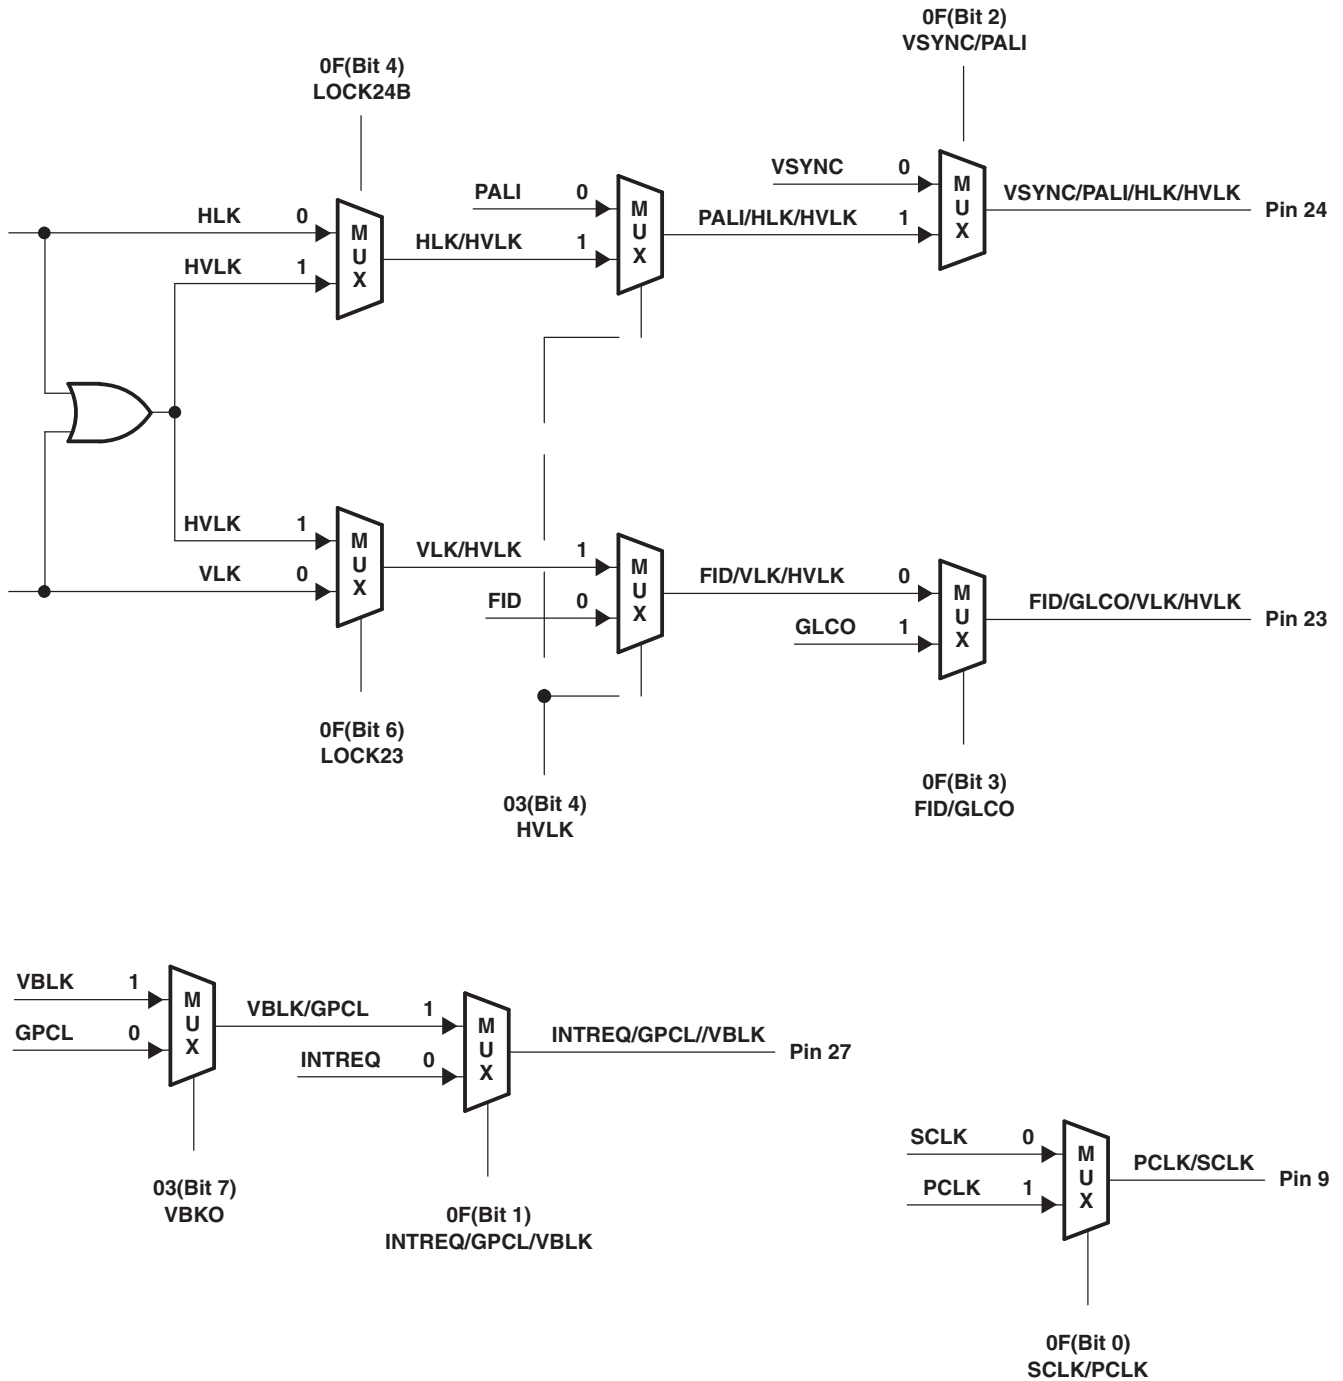


Figure 3-8. Configuration Shared Pins

NOTE

Also see the configuration shared pins register at subaddress 0Fh.

3.20.5 Autoswitch Mask Register

Address 04h
Default DCh

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---------|----------|----------|----------|----------|---|
| Reserved | | SEC_OFF | N443_OFF | PALN_OFF | PALM_OFF | Reserved | |

N443_OFF

0 = NTSC443 is unmasked from the autoswitch process. Autoswitch does switch to NTSC443.

1 = NTSC443 is masked from the autoswitch process. Autoswitch does not switch to NTSC443 (default).

PALN_OFF

0 = PAL-N is unmasked from the autoswitch process. Autoswitch does switch to PAL-N.

1 = PAL-N is masked from the autoswitch process. Autoswitch does not switch to PAL-N (default).

PALM_OFF

0 = PAL-M is unmasked from the autoswitch process. Autoswitch does switch to PAL-M.

1 = PAL-M is masked from the autoswitch process. Autoswitch does not switch to PAL-M (default).

SEC_OFF

0 = SECAM is unmasked from the autoswitch process. Autoswitch does switch to SECAM (default).

1 = SECAM is masked from the autoswitch process. Autoswitch does not switch to SECAM.

3.20.6 Color Killer Threshold Control Register

Address 06h
Default 10h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|------------------------|---|------------------------|---|---|---|---|
| Reserved | Automatic color killer | | Color killer threshold | | | | |

Automatic color killer

00 = Automatic mode (default)

01 = Reserved

10 = Color killer enabled, CbCr terminals forced to a zero color state

11 = Color killer disabled

Color killer threshold

11111 \approx 30 dB (minimum)

10000 \approx 24 dB (default)

00000 \approx 18 dB (maximum)

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.7 Luminance Processing Control #1 Register

Address 07h
 Default 60h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------------------|--------------------|--|---|---|---|---|
| 2× luma output enable | Pedestal not present | Disable raw header | Luma bypass enabled during vertical blanking | Luminance signal delay with respect to chrominance signal | | | |

2× luma output enable

- 0 = Output depends on bit 4, luminance bypass enabled during vertical blanking (default).
- 1 = Outputs 2x luma samples during the entire frame. This bit takes precedence over bit 4.

Pedestal not present

- 0 = 7.5 IRE pedestal is present on the analog video input signal.
- 1 = Pedestal is not present on the analog video input signal (default).

Disable raw header

- 0 = Insert 656 ancillary headers for raw data
- 1 = Disable 656 ancillary headers and instead force dummy ones (0x40) (default)

Luminance bypass enabled during vertical blanking

- 0 = Disabled. If bit 7, 2× luma output enable, is 0, normal luminance processing occurs and YCbCr samples are output during the entire frame (default).
- 1 = Enabled. If bit 7, 2× luma output enable, is 0, normal luminance processing occurs and YCbCr samples are output during VACTIVE and 2× luma samples are output during VBLK. Luminance bypass occurs for the duration of the vertical blanking as defined by registers 18h and 19h.

Luminance bypass occurs for the duration of the vertical blanking as defined by registers 18h and 19h.

Luma signal delay with respect to chroma signal in pixel clock increments (range -8 to +7 pixel clocks)

- 1111 = -8 pixel clocks delay
- 1011 = -4 pixel clocks delay
- 1000 = -1 pixel clocks delay
- 0000 = 0 pixel clocks delay (default)
- 0011 = +3 pixel clocks delay
- 0111 = +7 pixel clocks delay

3.20.8 Luminance Processing Control #2 Register

Address 08h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-------------------------|----------|---|--------------|---|-----------------|---|
| Reserved | Luminance filter select | Reserved | | Peaking gain | | Mac AGC control | |

Luminance filter select

- 0 = Luminance comb filter enabled (default)
- 1 = Luminance chroma trap filter enabled

Peaking gain (sharpness)

- 00 = 0 (default)
- 01 = 0.5
- 10 = 1
- 11 = 2

Information on peaking frequency:

- ITU-R BT.601 sampling rate: all standards
- Peaking center frequency is 2.6 MHz.

Mac AGC control

- 00 = Auto mode
- 01 = Auto mode
- 10 = Force Macrovision AGC pulse detection off
- 11 = Force Macrovision AGC pulse detection on

3.20.9 Brightness Control Register

Address 09h
Default 80h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------------|---|---|---|---|---|---|---|
| Brightness control | | | | | | | |

Brightness control

- 1111 1111 = 255 (bright)
- 1000 0000 = 128 (default)
- 0000 0000 = 0 (dark)

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.10 Color Saturation Control Register

Address 0Ah

Default 80h

| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Saturation control | | | | | | | |

Saturation control

1111 1111 = 255 (maximum)

1000 0000 = 128 (default)

0000 0000 = 0 (no color)

3.20.11 Hue Control Register

Address 0Bh

Default 00h

| | | | | | | | |
|-------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Hue control | | | | | | | |

Hue control (does not apply to SECAM)

0111 1111 = +180 degrees

0000 0000 = 0 degrees (default)

1000 0000 = -180 degrees

3.20.12 Contrast Control Register

Address 0Ch

Default 80h

| | | | | | | | |
|------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Contrast control | | | | | | | |

Contrast control

1111 1111 = 255 (maximum contrast)

1000 0000 = 128 (default)

0000 0000 = 0 (minimum contrast)

3.20.13 Outputs and Data Rates Select Register

Address 0Dh
Default 47h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-------------------------|------------------|------------------------|---|---------------------|---|---|
| Reserved | YCbCr output code range | CbCr code format | YCbCr data path bypass | | YCbCr output format | | |

YCbCr output code range

- 0 = ITU-R BT.601 coding range (Y ranges from 16 to 235. U and V range from 16 to 240)
- 1 = Extended coding range (Y, U, and V range from 1 to 254) (default)

CbCr code format

- 0 = Offset binary code (2s complement + 128) (default)
- 1 = Straight binary code (2s complement)

YCbCr data path bypass

- 00 = Normal operation (default)
- 01 = Decimation filter output connects directly to the YCbCr output pins. This data is similar to the digitized composite data, but the HBLANK area is replaced with ITU-R BT.656 digital blanking.
- 10 = Digitized composite (or digitized S-video luma). A/D output connects directly to YCbCr output pins.
- 11 = Reserved

YCbCr output format

- 000 = 8-bit 4:2:2 YCbCr with discrete sync output
- 001 = Reserved
- 010 = Reserved
- 011 = Reserved
- 100 = Reserved
- 101 = Reserved
- 110 = Reserved
- 111 = 8-bit ITU-R BT.656 interface with embedded sync output (default)

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.14 Luminance Processing Control #3 Register

Address 0Eh
 Default 00h

| | | | | | | | |
|----------|---|---|---|---|---|------------------------------|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | | | | | | Luminance trap filter select | |

Luminance filter stop band bandwidth (MHz)

- 00 = No notch (default)
- 01 = Notch 1
- 10 = Notch 2
- 11 = Notch 3

Luminance filter select [1:0] selects one of the four chroma trap (notch) filters to produce luminance signal by removing the chrominance signal from the composite video signal. The stopband of the chroma trap filter is centered at the chroma subcarrier frequency with stopband bandwidth controlled by the two control bits. See the following table for the stopband bandwidths. The WCF bit is controlled in the chrominance control #2 register, see [Section 3.20.25](#).

| WCF | FILTER SELECT | NTSC/PAL/SECAM ITU-R BT.601 |
|-----|---------------|--------------------------------|
| 0 | 00 | 1.2244 |
| | 01 | 0.8782 |
| | 10 | 0.7297 |
| | 11 | 0.4986 |
| 1 | 00 | 1.4170 |
| | 01 | 1.0303 |
| | 10 | 0.8438 |
| | 11 | 0.5537 |

3.20.15 Configuration Shared Pins Register

Address 0Fh
Default 08h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|--------|----------|---------|----------|------------|----------------------|-----------|
| Reserved | LOCK23 | Reserved | LOCK24B | FID/GLCO | VSYNC/PALI | INTREQ/GPCL/ VBLK | SCLK/PCLK |

LOCK23 (pin 23) function select

- 0 = FID (default, if bit 3 is selected to output FID)
- 1 = Lock indicator (indicates whether the device is locked vertically)

LOCK24B (pin 24) function select

- 0 = PALI (default, if bit 2 is selected to output PALI)
- 1 = Lock indicator (indicates whether the device is locked horizontally)

FID/GLCO (pin 23) function select (also see register 03h for enhanced functionality)

- 0 = FID
- 1 = GLCO (default)

VSYNC/PALI (pin 24) function select (also see register 03h for enhanced functionality)

- 0 = VSYNC (default)
- 1 = PALI

INTREQ/GPCL/VBLK (pin 27) function select

- 0 = INTREQ (default)
- 1 = GPCL or VBLK depending on bit 7 of register 03h

SCLK/PCLK (pin 9) function select

- 0 = SCLK (default)
- 1 = PCLK (1x pixel clock frequency)

See [Figure 3-8](#) for the relationship between the configuration shared pins.

3.20.16 Active Video Cropping Start Pixel MSB Register

Address 11h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------------------|---|---|---|---|---|---|---|
| AVID start pixel MSB [9:2] | | | | | | | |

Active video cropping start pixel MSB [9:2], set this register first before setting register 12h. The TVP5150AM1 decoder updates the AVID start values only when register 12h is written to. This start pixel value is relative to the default values of the AVID start pixel.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.17 Active Video Cropping Start Pixel LSB Register

Address 12h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|-------------|----------------------------|---|
| Reserved | | | | | AVID active | AVID start pixel LSB [1:0] | |

AVID active

0 = AVID out active in VBLK (default)

1 = AVID out inactive in VBLK

Active video cropping start pixel LSB [1:0]: The TVP5150AM1 decoder updates the AVID start values only when this register is written to.

AVID start [9:0] (combined registers 11h and 12h)

01 1111 1111 = 511

00 0000 0001 = 1

00 0000 0000 = 0 (default)

11 1111 1111 = 1023

10 0000 0000 = 512

3.20.18 Active Video Cropping Stop Pixel MSB Register

Address 13h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|---|---|---|---|---|---|---|
| AVID stop pixel MSB | | | | | | | |

Active video cropping stop pixel MSB [9:2], set this register first before setting the register 14h. The TVP5150AM1 decoder updates the AVID stop values only when register 14h is written to. This stop pixel value is relative to the default values of the AVID stop pixel.

3.20.19 Active Video Cropping Stop Pixel LSB Register

Address 14h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|---|---------------------|---|
| Reserved | | | | | | AVID stop pixel LSB | |

Active video cropping stop pixel LSB [1:0]: The number of pixels of active video must be an even number. The TVP5150AM1 decoder updates the AVID stop values only when this register is written to.

AVID stop [9:0] (combined registers 13h and 14h)

01 1111 1111 = 511

00 0000 0001 = 13

00 0000 0000 = 0 (default) (see [Figure 3-3](#) and [Figure 3-4](#))

11 1111 1111 = 1023

10 0000 0000 = 512

3.20.20 Genlock and RTC Register

Address 15h
Default 01h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|-----------------|---|----------|----------|---|---|
| Reserved | | F/V bit control | | Reserved | GLCO/RTC | | |

F/V bit control

| BIT 5 | BIT 4 | NUMBER OF LINES | F BIT | V BIT |
|-------|-------|------------------|--------------|--------------------------|
| 0 | 0 | Standard | ITU-R BT.656 | ITU-R BT.656 |
| | | Nonstandard even | Force to 1 | Switch at field boundary |
| | | Nonstandard odd | Toggles | Switch at field boundary |
| 0 | 1 | Standard | ITU-R BT.656 | ITU-R BT.656 |
| | | Nonstandard | Toggles | Switch at field boundary |
| 1 | 0 | Standard | ITU-R BT.656 | ITU-R BT.656 |
| | | Nonstandard | Pulse mode | Switch at field boundary |
| 1 | 1 | Illegal | | |

GLCO/RTC. The following table shows the different modes.

| BIT 2 | BIT 1 | BIT 0 | GENLOCK/RTC MODE |
|-------|-------|-------|-----------------------------|
| 0 | X | 0 | GLCO |
| 0 | X | 1 | RTC output mode 0 (default) |
| 1 | X | 0 | GLCO |
| 1 | X | 1 | RTC output mode 1 |

All other values are reserved.

Figure 3-6 shows the timing of GLCO, and Figure 3-7 shows the timing of RTC.

3.20.21 Horizontal Sync Start Register

Address 16h
Default 80h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|
| HSYNC start | | | | | | | |

Horizontal sync (HSYNC) start

- 1111 1111 = 27 × 4 pixel clocks
- 1111 1110 = 26 × 4 pixel clocks
- 1000 0001 = 1 × 4 pixel clocks
- 1000 0000 = 0 pixel clocks (default)
- 0111 1111 = 1 × 4 pixel clocks
- 0111 1110 = 2 × 4 pixel clocks
- 0000 0000 = 128 × 4 pixel clocks

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A—NOVEMBER 2007—REVISED AUGUST 2009

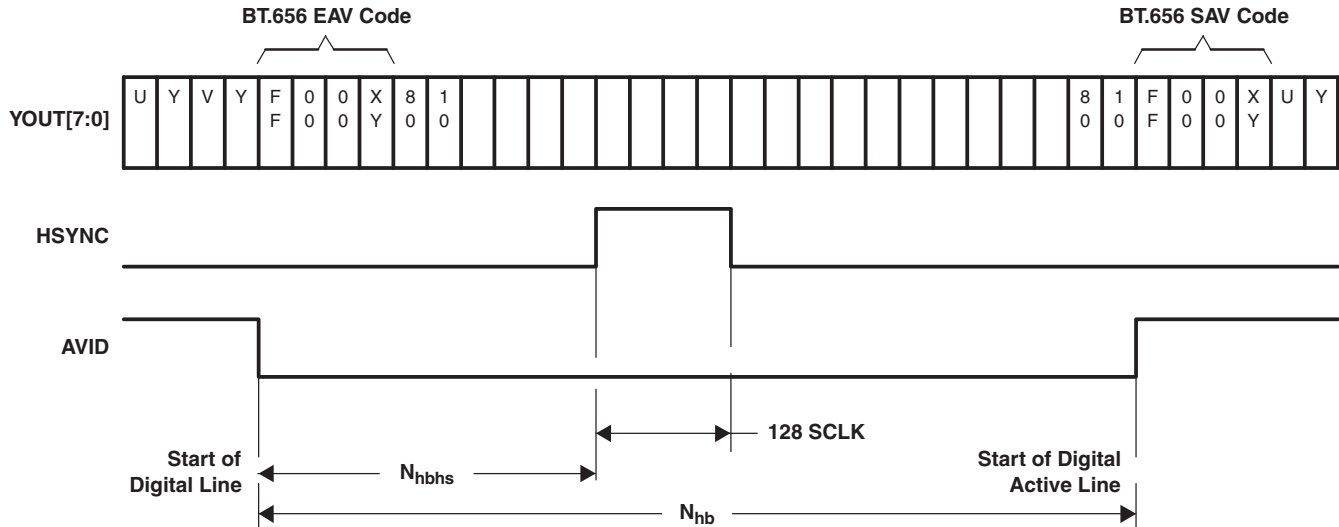


Figure 3-9. Horizontal Sync

Table 3-12. Clock Delays (SCLKs)

| STANDARD | N_{hbhs} | N_{hb} |
|----------|------------|----------|
| NTSC | 16 | 272 |
| PAL | 20 | 284 |
| SECAM | 40 | 280 |

Detailed timing information is also available in [Section 3.12](#).

3.20.22 Vertical Blanking Start Register

Address 18h
 Default 00h

| | | | | | | | |
|-------------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Vertical blanking start | | | | | | | |

Vertical blanking (VBLK) start

- 0111 1111 = 127 lines after start of vertical blanking interval
- 0000 0001 = 1 line after start of vertical blanking interval
- 0000 0000 = Same time as start of vertical blanking interval (default) (see [Figure 3-2](#))
- 1111 1111 = 1 line before start of vertical blanking interval
- 1000 0000 = 128 lines before start of vertical blanking interval

Vertical blanking is adjustable with respect to the standard vertical blanking intervals. The setting in this register determines the timing of the GPCL/VBLK signal when it is configured to output vertical blank (see register 03h). The setting in this register also determines the duration of the luma bypass function (see register 07h).

3.20.23 Vertical Blanking Stop Register

Address 19h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------------------|---|---|---|---|---|---|---|
| Vertical blanking stop | | | | | | | |

Vertical blanking (VBLK) stop

0111 1111 = 127 lines after stop of vertical blanking interval

0000 0001 = 1 line after stop of vertical blanking interval

0000 0000 = Same time as stop of vertical blanking interval (default) (see [Figure 3-2](#))

1111 1111 = 1 line before stop of vertical blanking interval

1000 0000 = 128 lines before stop of vertical blanking interval

Vertical blanking is adjustable with respect to the standard vertical blanking intervals. The setting in this register determines the timing of the GPCL/VBLK signal when it is configured to output vertical blank (see register 03h). The setting in this register also determines the duration of the luma bypass function (see register 07h).

3.20.24 Chrominance Control #1 Register

Address 1Ah
Default 0Ch

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|-----------------|---|-------------------------------------|------------------------------|---|
| Reserved | | | Color PLL reset | Chrominance adaptive comb filter enable (ACE) | Chrominance comb filter enable (CE) | Automatic color gain control | |

Color PLL reset

0 = Color PLL not reset (default)

1 = Color PLL reset

When a 1 is written to this bit, the color PLL phase is reset to zero and the subcarrier PLL phase reset bit is transmitted on terminal 23 (GLCO) on the next line (NTSC or PAL).

Chrominance adaptive comb filter enable (ACE)

0 = Disable

1 = Enable (default)

Chrominance comb filter enable (CE)

0 = Disable

1 = Enable (default)

Automatic color gain control (ACGC)

00 = ACGC enabled (default)

01 = Reserved

10 = ACGC disabled

11 = ACGC frozen to the previously set value

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.25 Chrominance Control #2 Register

Address 1Bh

Default 14h

| | | | | | | | |
|----------|---|---|---|----------|-----|---------------------------|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | | | | Reserved | WCF | Chrominance filter select | |

Wideband chroma filter (WCF)

0 = Disable

1 = Enable (default)

Chrominance low pass filter select

00 = No notch (default)

01 = Notch 1

10 = Notch 2

11 = Notch 3

Chrominance output bandwidth (MHz)

| WCF | FILTER SELECT | NTSC/PAL/SECAM ITU-R BT.601 |
|-----|---------------|--------------------------------|
| 0 | 00 | 1.2214 |
| | 01 | 0.8782 |
| | 10 | 0.7297 |
| | 11 | 0.4986 |
| 1 | 00 | 1.4170 |
| | 01 | 1.0303 |
| | 10 | 0.8438 |
| | 11 | 0.5537 |

3.20.26 Interrupt Reset Register B

Address 1Ch
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------------|----------------------------------|----------|--------------------------|--------------------------------|--------------------------|------------------------|----------------------|
| Software initialization reset | Macrovision detect changed reset | Reserved | Field rate changed reset | Line alternation changed reset | Color lock changed reset | H/V lock changed reset | TV/VCR changed reset |

Interrupt reset register B is used by the external processor to reset the interrupt status bits in interrupt status register B. Bits loaded with a 1 allow the corresponding interrupt status bit to reset to 0. Bits loaded with a 0 have no effect on the interrupt status bits.

Software initialization reset

- 0 = No effect (default)
- 1 = Reset software initialization bit

Macrovision detect changed reset

- 0 = No effect (default)
- 1 = Reset Macrovision detect changed bit

Field rate changed reset

- 0 = No effect (default)
- 1 = Reset field rate changed bit

Line alternation changed reset

- 0 = No effect (default)
- 1 = Reset line alternation changed bit

Color lock changed reset

- 0 = No effect (default)
- 1 = Reset color lock changed bit

H/V lock changed reset

- 0 = No effect (default)
- 1 = Reset H/V lock changed bit

TV/VCR changed reset [TV/VCR mode is determined by counting the total number of lines/frame. The mode switches to VCR for nonstandard number of lines]

- 0 = No effect (default)
- 1 = Reset TV/VCR changed bit

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.27 Interrupt Enable Register B

Address 1Dh
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|----------------------------|----------|--------------------|--------------------------|--------------------|------------------|----------------|
| Software initialization occurred enable | Macrovision detect changed | Reserved | Field rate changed | Line alternation changed | Color lock changed | H/V lock changed | TV/VCR changed |

Interrupt enable register B is used by the external processor to mask unnecessary interrupt sources for interrupt B. Bits loaded with a 1 allow the corresponding interrupt condition to generate an interrupt on the external pin. Conversely, bits loaded with zeros mask the corresponding interrupt condition from generating an interrupt on the external pin. This register only affects the external pin, it does not affect the bits in the interrupt status register. A given condition can set the appropriate bit in the status register and not cause an interrupt on the external pin. To determine if this device is driving the interrupt pin either AND interrupt status register B with interrupt enable register B or check the state of interrupt B in the interrupt B active register.

Software initialization occurred enable

- 0 = Disabled (default)
- 1 = Enabled

Macrovision detect changed

- 0 = Disabled (default)
- 1 = Enabled

Field rate changed

- 0 = Disabled (default)
- 1 = Enabled

Line alternation changed

- 0 = Disabled (default)
- 1 = Enabled

Color lock changed

- 0 = Disabled (default)
- 1 = Enabled

H/V lock changed

- 0 = Disabled (default)
- 1 = Enabled

TV/VCR changed

- 0 = Disabled (default)
- 1 = Enabled

3.20.28 Interrupt Configuration Register B

Address 1Eh
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|---|---|----------------------|
| Reserved | | | | | | | Interrupt polarity B |

Interrupt polarity B

0 = Interrupt B is active low (default).

1 = Interrupt B is active high.

Interrupt polarity B must be same as interrupt polarity A bit at bit 0 of the Interrupt Configuration Register A at address C2h.

Interrupt Configuration Register B is used to configure the polarity of interrupt B on the external interrupt pin. When the interrupt B is configured for active low, the pin is driven low when active and high impedance when inactive (open-drain). Conversely, when the interrupt B is configured for active high, it is driven high for active and driven low for inactive.

3.20.29 Video Standard Register

Address 28h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|----------------|---|---|---|
| Reserved | | | | Video standard | | | |

Video standard

0000 = Autoswitch mode (default)

0001 = Reserved

0010 = (M) NTSC ITU-R BT.601

0011 = Reserved

0100 = (B, G, H, I, N) PAL ITU-R BT.601

0101 = Reserved

0110 = (M) PAL ITU-R BT.601

0111 = Reserved

1000 = (Combination-N) PAL ITU-R BT.601

1001 = Reserved

1010 = NTSC 4.43 ITU-R BT.601

1011 = Reserved

1100 = SECAM ITU-R BT.601

With the autoswitch code running, the application can force the device to operate in a particular video standard mode and sample rate by writing the appropriate value into this register.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.30 Cb Gain Factor Register

Address 2Ch

| | | | | | | | |
|----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Cb gain factor | | | | | | | |

This is a read-only register that provides the gain applied to the Cb in the YCbCr data stream.

3.20.31 Cr Gain Factor Register

Address 2Dh

| | | | | | | | |
|----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Cr gain factor | | | | | | | |

This is a read-only register that provides the gain applied to the Cr in the YCbCr data stream.

3.20.32 Macrovision On Counter Register

Address 2Eh

Default 0Fh

| | | | | | | | |
|-------------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Macrovision off counter | | | | | | | |

This register allows the user to determine how many consecutive frames in which the Macrovision AGC pulses are not detected before the decoder decides that the Macrovision AGC pulses are not present.

3.20.33 Macrovision Off Counter Register

Address 2Fh

Default 01h

| | | | | | | | |
|-------------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Macrovision off counter | | | | | | | |

This register allows the user to determine how many consecutive frames in which the Macrovision AGC pulses are not detected before the decoder decides that the Macrovision AGC pulses are not present.

3.20.34 656 Revision Select Register

Address 30h

Default 00h

| | | | | | | | |
|----------|---|---|---|---|---|---|------------------------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | | | | | | | 656 revision select |

656 revision select

0 = Adheres to ITU-R BT.656.4 timing (default)

1 = Adheres to ITU-R BT.656.3 timing

3.20.35 MSB of Device ID Register

Address 80h
Default 51h

| | | | | | | | |
|------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| MSB of device ID | | | | | | | |

This register identifies the MSB of the device ID. Value = 0x51.

3.20.36 LSB of Device ID Register

Address 81h
Default 50h

| | | | | | | | |
|------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| LSB of device ID | | | | | | | |

This register identifies the LSB of the device ID. Value = 0x50.

3.20.37 ROM Major Version Register

Address 82h
Default 04h

| | | | | | | | |
|-------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ROM major version | | | | | | | |

This register can contain a number from 0x01 to 0xFF.

3.20.38 ROM Minor Version Register

Address 83h
Default 00h

| | | | | | | | |
|-------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ROM minor version | | | | | | | |

This register can contain a number from 0x01 to 0xFF.

3.20.39 Vertical Line Count MSB Register

Address 84h

| | | | | | | | |
|----------|---|---|---|---|---|-------------------------|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | | | | | | Vertical line count MSB | |

Vertical line count bits [9:8]

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.40 Vertical Line Count LSB Register

Address 85h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|---|---|---|---|---|---|---|
| Vertical line count LSB | | | | | | | |

Vertical line count bits [7:0]

Registers 84h and 85h can be read and combined to extract the detected number of lines per frame. This can be used with nonstandard video signals such as a VCR in fast-forward or rewind modes to synchronize the downstream video circuitry.

3.20.41 Interrupt Status Register B

Address 86h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------------------------|----------|--------------------|--------------------------|--------------------|------------------|----------------|
| Software initialization | Macrovision detect changed | Reserved | Field rate changed | Line alternation changed | Color lock changed | H/V lock changed | TV/VCR changed |

Software initialization

- 0 = Software initialization is not ready (default).
- 1 = Software initialization is ready.

Macrovision detect changed

- 0 = Macrovision detect status has not changed (default).
- 1 = Macrovision detect status has changed.

Field rate changed

- 0 = Field rate has not changed (default).
- 1 = Field rate has changed.

Line alternation changed

- 0 = Line alteration has not changed (default).
- 1 = Line alternation has changed.

Color lock changed

- 0 = Color lock status has not changed (default).
- 1 = Color lock status has changed.

H/V lock changed

- 0 = H/V lock status has not changed (default).
- 1 = H/V lock status has changed.

TV/VCR changed

- 0 = TV/VCR status has not changed (default).
- 1 = TV/VCR status has changed.

Interrupt status register B is polled by the external processor to determine the interrupt source for interrupt B. After an interrupt condition is set, it can be reset by writing to the interrupt reset register B at subaddress 1Ch with a 1 in the appropriate bit.

3.20.42 Interrupt Active Register B

Address 87h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|---|---|-------------|
| Reserved | | | | | | | Interrupt B |

Interrupt B

0 = Interrupt B is not active on the external terminal (default).

1 = Interrupt B is active on the external terminal.

The interrupt active register B is polled by the external processor to determine if interrupt B is active.

3.20.43 Status Register #1

Address 88h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------------------|-------------------------|-------------------|------------------|------------------------------|---------------------------|-----------------------------|---------------|
| Peak white detect status | Line-alternating status | Field rate status | Lost lock detect | Color subcarrier lock status | Vertical sync lock status | Horizontal sync lock status | TV/VCR status |

Peak white detect status

0 = Peak white is not detected.

1 = Peak white is detected.

Line-alternating status

0 = Nonline alternating

1 = Line alternating

Field rate status

0 = 60 Hz

1 = 50 Hz

Lost lock detect

0 = No lost lock since status register #1 was last read.

1 = Lost lock since status register #1 was last read.

Color subcarrier lock status

0 = Color subcarrier is not locked.

1 = Color subcarrier is locked.

Vertical sync lock status

0 = Vertical sync is not locked.

1 = Vertical sync is locked.

Horizontal sync lock status

0 = Horizontal sync is not locked.

1 = Horizontal sync is locked.

TV/VCR status. TV mode is determined by detecting standard line-to-line variations and specific chroma SCH phases based on the standard input video format. VCR mode is determined by detecting variations in the chroma SCH phases compared to the chroma SCH phases of the standard input video format.

0 = TV

1 = VCR

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.44 Status Register #2

Address 89h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-----------------------|---------------------|-----------------------|------------------------------|-----------------------|---|---|
| Reserved | Weak signal detection | PAL switch polarity | Field sequence status | AGC and offset frozen status | Macrovision detection | | |

Weak signal detection

0 = No weak signal

1 = Weak signal mode

PAL switch polarity of first line of odd field

0 = PAL switch is 0.

1 = PAL switch is 1.

Field sequence status

0 = Even field

1 = Odd field

AGC and offset frozen status

0 = AGC and offset are not frozen.

1 = AGC and offset are frozen.

Macrovision detection

000 = No copy protection

001 = AGC process present (Macrovision Type 1 present)

010 = Colorstripe process Type 2 present

011 = AGC process and colorstripe process Type 2 present

100 = Reserved

101 = Reserved

110 = Colorstripe process Type 3 present

111 = AGC process and color stripe process Type 3 present

3.20.45 Status Register #3

Address 8Ah

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--|---|---|---|---|---|---|---|
| Front-end AGC gain value (analog and digital) ⁽¹⁾ | | | | | | | |

(1) Represents 8 bits (MSB) of a 10-bit value

This register provides the front-end AGC gain value of both analog and digital gains.

3.20.46 Status Register #4

Address 8Bh

| | | | | | | | |
|--------------------------------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Subcarrier to horizontal (SCH) phase | | | | | | | |

SCH (color PLL subcarrier phase at 50% of the falling edge of horizontal sync of line one of odd field; step size 360°/256)

0000 0000 = 0.00°

0000 0001 = 1.41°

0000 0010 = 2.81°

1111 1110 = 357.2°

1111 1111 = 358.6°

3.20.47 Status Register #5

Address 8Ch

| | | | | | | | |
|-----------------|----------|---|---|----------------|---|---|---------------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Autoswitch mode | Reserved | | | Video standard | | | Sampling rate |

This register contains information about the detected video standard and the sampling rate at which the device is currently operating. When autoswitch code is running, this register must be tested to determine which video standard has been detected.

Autoswitch mode

0 = Stand-alone (forced video standard) mode

1 = Autoswitch mode

Video standard

| VIDEO STANDARD [3:1] | | | SR | VIDEO STANDARD |
|----------------------|-------|-------|-------|----------------------------------|
| BIT 3 | BIT 2 | BIT 1 | BIT 0 | |
| 0 | 0 | 0 | 0 | Reserved |
| 0 | 0 | 0 | 1 | (M) NTSC ITU-R BT.601 |
| 0 | 0 | 1 | 0 | Reserved |
| 0 | 0 | 1 | 1 | (B, G, H, I, N) PAL ITU-R BT.601 |
| 0 | 1 | 0 | 0 | Reserved |
| 0 | 1 | 0 | 1 | (M) PAL ITU-R BT.601 |
| 0 | 1 | 1 | 0 | Reserved |
| 0 | 1 | 1 | 1 | PAL-N ITU-R BT.601 |
| 1 | 0 | 0 | 0 | Reserved |
| 1 | 0 | 0 | 1 | NTSC 4.43 ITU-R BT.601 |
| 1 | 0 | 1 | 0 | Reserved |
| 1 | 0 | 1 | 1 | SECAM ITU-R BT.601 |

Sampling rate (SR)

0 = Reserved

1 = ITU-R BT.601

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.48 Closed Caption Data Registers

Address 93h 90h

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-------------------------------|---|---|---|---|---|---|---|
| 90h | Closed caption field 1 byte 1 | | | | | | | |
| 91h | Closed caption field 1 byte 2 | | | | | | | |
| 92h | Closed caption field 2 byte 1 | | | | | | | |
| 93h | Closed caption field 2 byte 2 | | | | | | | |

These registers contain the closed caption data arranged in bytes per field.

3.20.49 WSS Data Registers

Address 99h 94h

NTSC

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | BYTE |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|--------------------|
| 94h | | | b5 | b4 | b3 | b2 | b1 | b0 | WSS field 1 byte 1 |
| 95h | b13 | b12 | b11 | b10 | b9 | b8 | b7 | b6 | WSS field 1 byte 2 |
| 96h | | | b19 | b18 | b17 | b16 | b15 | b14 | WSS field 1 byte 3 |
| 97h | | | b5 | b4 | b3 | b2 | b1 | b0 | WSS field 2 byte 1 |
| 98h | b13 | b12 | b11 | b10 | b9 | b8 | b7 | b6 | WSS field 2 byte 2 |
| 99h | | | b19 | b18 | b17 | b16 | b15 | b14 | WSS field 2 byte 3 |

These registers contain the wide screen signaling (WSS) data for NTSC.

For NTSC, the bits are:

- ~~Bits~~ 0 represent word 0, aspect ratio.
- ~~Bits~~ 2 represent word 1, header code for word 2.
- ~~Bits~~ 6 represent word 2, copy control.
- ~~Bits~~ 14 represent word 3, CRC.

PAL/SECAM

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | BYTE |
|---------|----------|----|-----|-----|-----|-----|----|----|--------------------|
| 94h | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 | WSS field 1 byte 1 |
| 95h | | | b13 | b12 | b11 | b10 | b9 | b8 | WSS field 1 byte 2 |
| 96h | Reserved | | | | | | | | |
| 97h | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 | WSS field 2 byte 1 |
| 98h | | | b13 | b12 | b11 | b10 | b9 | b8 | WSS field 2 byte 2 |
| 99h | Reserved | | | | | | | | |

For PAL/SECAM, the bits are:

- ~~Bits~~ 0 represent group 1, aspect ratio.
- ~~Bits~~ 4 represent group 2, enhanced services.
- ~~Bits~~ 8 represent group 3, subtitles.
- ~~Bits~~ 11 represent group 4, others.

3.20.50 VPS Data Registers

Address A6h 9Ah

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-------------|---|---|---|---|---|---|---|
| 9Ah | VPS byte 1 | | | | | | | |
| 9Bh | VPS byte 2 | | | | | | | |
| 9Ch | VPS byte 3 | | | | | | | |
| 9Dh | VPS byte 4 | | | | | | | |
| 9Eh | VPS byte 5 | | | | | | | |
| 9Fh | VPS byte 6 | | | | | | | |
| A0h | VPS byte 7 | | | | | | | |
| A1h | VPS byte 8 | | | | | | | |
| A2h | VPS byte 9 | | | | | | | |
| A3h | VPS byte 10 | | | | | | | |
| A4h | VPS byte 11 | | | | | | | |
| A5h | VPS byte 12 | | | | | | | |
| A6h | VPS byte 13 | | | | | | | |

These registers contain the entire VPS data line except the clock run-in code or the start code.

3.20.51 VITC Data Registers

Address AFh A7h

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-----------------------------|---|---|---|---|---|---|---|
| A7h | VITC byte 1, frame byte 1 | | | | | | | |
| A8h | VITC byte 2, frame byte 2 | | | | | | | |
| A9h | VITC byte 3, seconds byte 1 | | | | | | | |
| AAh | VITC byte 4, seconds byte 2 | | | | | | | |
| ABh | VITC byte 5, minutes byte 1 | | | | | | | |
| ACh | VITC byte 6, minutes byte 2 | | | | | | | |
| ADh | VITC byte 7, hour byte 1 | | | | | | | |
| A Eh | VITC byte 8, hour byte 2 | | | | | | | |
| AFh | VITC byte 9, CRC | | | | | | | |

These registers contain the VITC data.

3.20.52 VBI FIFO Read Data Register

Address B0h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------|---|---|---|---|---|---|---|
| FIFO read data | | | | | | | |

This address is provided to access VBI data in the FIFO through the host port. All forms of teletext data come directly from the FIFO, while all other forms of VBI data can be programmed to come from the registers or from the FIFO. Current status of the FIFO can be found at address C6h and the number of bytes in the FIFO is located at address C7h. If the host port is to be used to read data from the FIFO, then the output formatter must be disabled at address CDh bit 0. The format used for the VBI FIFO is shown in [Section 3.9](#).

3.20.53 Teletext Filter and Mask Registers

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

Address BAh B1h
 Default 00h

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|-----------------|---|---|---|--------------------|---|---|
| B1h | | Filter 1 mask 1 | | | | Filter 1 pattern 1 | | |
| B2h | | Filter 1 mask 2 | | | | Filter 1 pattern 2 | | |
| B3h | | Filter 1 mask 3 | | | | Filter 1 pattern 3 | | |
| B4h | | Filter 1 mask 4 | | | | Filter 1 pattern 4 | | |
| B5h | | Filter 1 mask 5 | | | | Filter 1 pattern 5 | | |
| B6h | | Filter 2 mask 1 | | | | Filter 2 pattern 1 | | |
| B7h | | Filter 2 mask 2 | | | | Filter 2 pattern 2 | | |
| B8h | | Filter 2 mask 3 | | | | Filter 2 pattern 3 | | |
| B9h | | Filter 2 mask 4 | | | | Filter 2 pattern 4 | | |
| BAh | | Filter 2 mask 5 | | | | Filter 2 pattern 5 | | |

For an NABTS system, the packet prefix consists of five bytes. Each byte contains four data bits (D[3:0]) interlaced with four Hamming protection bits (H[3:0]):

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| D[3] | H[3] | D[2] | H[2] | D[1] | H[1] | D[0] | H[0] |

Only the data portion D[3:0] from each byte is applied to a teletext filter function with the corresponding pattern bits P[3:0] and mask bits M[3:0]. Hamming protection bits are ignored by the filter.

For a WST system (PAL or NTSC), the packet prefix consists of two bytes so that two patterns are used. Patterns 3, 4, and 5 are ignored.

The mask bits enable filtering using the corresponding bit in the pattern register. For example, a 1 in the LSB of mask 1 means that the filter module must compare the LSB of nibble 1 in the pattern register to the first data bit on the transaction. If these match, a true result is returned. A 0 in a bit of mask 1 means that the filter module must ignore that data bit of the transaction. If all zeros are programmed in the mask bits, the filter matches all patterns returning a true result (default 00h).

Pattern and mask for each byte and filter are referred as <1,2>P,M <1,2,3,4,5> where:

- > <1,2> identifies the filter 1 or 2
- > <P,M> identifies the pattern or mask
- > <1,2,3,4,5> identifies the byte number

3.20.54 Teletext Filter Control Register

Address BBh
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|--------------|---|------|---------------------|---------------------|
| Reserved | | | Filter logic | | Mode | TTX filter 2 enable | TTX filter 1 enable |

Filter logic allows different logic to be applied when combining the decision of filter 1 and filter 2 as follows:

00 = NOR (Default)

01 = NAND

10 = OR

11 = AND

Mode

0 = Teletext WST PAL mode B (2 header bytes) (default)

1 = Teletext NABTS NTSC mode C (5 header bytes)

TTX filter 2 enable

0 = Disabled (default)

1 = Enabled

TTX filter 1 enable

0 = Disabled (default)

1 = Enabled

If the filter matches or if the filter mask is all zeros, a true result is returned.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.55 Interrupt Status Register A

Address C0h

Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------------|----------------|----------|---|---|--------------------------|----------------|----------------|
| Lock state interrupt | Lock interrupt | Reserved | | | FIFO threshold interrupt | Line interrupt | Data interrupt |

The interrupt status register A can be polled by the host processor to determine the source of an interrupt. After an interrupt condition is set it can be reset by writing to this register with a 1 in the appropriate bit(s).

Lock state interrupt

0 = TVP5150AM1 is not locked to the video signal (default).

1 = TVP5150AM1 is locked to the video signal.

Lock interrupt

0 = A transition has not occurred on the lock signal (default).

1 = A transition has occurred on the lock signal.

FIFO threshold interrupt

0 = The amount of data in the FIFO has not yet crossed the threshold programmed at address C8h (default).

1 = The amount of data in the FIFO has crossed the threshold programmed at address C8h.

Line interrupt

0 = The video line number has not yet been reached (default).

1 = The video line number programmed in address CAh has occurred.

Data interrupt

0 = No data is available (default).

1 = VBI data is available either in the FIFO or in the VBI data registers.

3.20.56 Interrupt Enable Register A

Address C1h
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-----------------------|---------------------------------|----------------------------|----------|---------------------------------|-----------------------|-----------------------|
| Reserved | Lock interrupt enable | Cycle complete interrupt enable | Bus error interrupt enable | Reserved | FIFO threshold interrupt enable | Line interrupt enable | Data interrupt enable |

The interrupt enable register A is used by the host processor to mask unnecessary interrupt sources. Bits loaded with a 1 allow the corresponding interrupt condition to generate an interrupt on the external pin. Conversely, bits loaded with a 0 mask the corresponding interrupt condition from generating an interrupt on the external pin. This register only affects the interrupt on the external terminal, it does not affect the bits in interrupt status register A. A given condition can set the appropriate bit in the status register and not cause an interrupt on the external terminal. To determine if this device is driving the interrupt terminal, either perform a logical AND of interrupt status register A with interrupt enable register A, or check the state of the interrupt A bit in the interrupt configuration register at address C2h.

Lock interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

Cycle complete interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

Bus error interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

FIFO threshold interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

Line interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

Data interrupt enable

- 0 = Disabled (default)
- 1 = Enabled

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.57 Interrupt Configuration Register A

Address C2h
Default 04h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|----------------------|-------------|----------------------|
| Reserved | | | | | YCbCr enable (VDPOE) | Interrupt A | Interrupt polarity A |

YCbCr enable (VDPOE)

0 = YCbCr pins are high impedance.

1 = YCbCr pins are active if other conditions are met (default).

Interrupt A (read only)

0 = Interrupt A is not active on the external pin (default).

1 = Interrupt A is active on the external pin.

Interrupt polarity A

0 = Interrupt A is active low (default).

1 = Interrupt A is active high.

Interrupt configuration register A is used to configure the polarity of the external interrupt terminal. When interrupt A is configured as active low, the terminal is driven low when active and high impedance when inactive (open collector). Conversely, when the terminal is configured as active high, it is driven high when active and driven low when inactive.

3.20.58 VDP Configuration RAM Register

Address C3h C4h C5h
Default DCh 0Fh 00h

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|---------|--------------------|---|---|---|---|---|---|---------------|--|
| C3h | Configuration data | | | | | | | | |
| C4h | RAM address (7:0) | | | | | | | | |
| C5h | Reserved | | | | | | | RAM address 8 | |

The configuration RAM data is provided to initialize the VDP with initial constants. The configuration RAM is 512 bytes organized as 32 different configurations of 16 bytes each. The first 12 configurations are defined for the current VBI standards. An additional two configurations can be used as a custom programmed mode for unique standards such as Gemstar.

Address C3h is used to read or write to the RAM. The RAM internal address counter is automatically incremented with each transaction. Addresses C5h and C4h make up a 9-bit address to load the internal address counter with a specific start address. This can be used to write a subset of the RAM for only those standards of interest. Registers D0h must all be programmed with FFh, before writing or reading the configuration RAM. Full field mode (CFh) must be disabled as well.

The suggested RAM contents are shown in [Table 3-13](#). All values are hexadecimal.

Table 3-13. VBI Configuration RAM for Signals With Pedestal

| INDEX | ADDRESS | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
|-----------------|---------|--------------|----|----|----|----|----|----|----|----|----|----|---|---|---|----|---|
| WST SECAM | 000 | AA | AA | FF | FF | E7 | 2E | 20 | 26 | E6 | B4 | 0E | 0 | 0 | 0 | 10 | 0 |
| WST SECAM | 010 | AA | AA | FF | FF | E7 | 2E | 20 | 26 | E6 | B4 | 0E | 0 | 0 | 0 | 10 | 0 |
| WST PAL B | 020 | AA | AA | FF | FF | 27 | 2E | 20 | 2B | A6 | 72 | 10 | 0 | 0 | 0 | 10 | 0 |
| WST PAL B | 030 | AA | AA | FF | FF | 27 | 2E | 20 | 2B | A6 | 72 | 10 | 0 | 0 | 0 | 10 | 0 |
| WST PAL C | 040 | AA | AA | FF | FF | E7 | 2E | 20 | 22 | A6 | 98 | 0D | 0 | 0 | 0 | 10 | 0 |
| WST PAL C | 050 | AA | AA | FF | FF | E7 | 2E | 20 | 22 | A6 | 98 | 0D | 0 | 0 | 0 | 10 | 0 |
| WST NTSC | 060 | AA | AA | FF | FF | 27 | 2E | 20 | 23 | 69 | 93 | 0D | 0 | 0 | 0 | 10 | 0 |
| WST NTSC | 070 | AA | AA | FF | FF | 27 | 2E | 20 | 23 | 69 | 93 | 0D | 0 | 0 | 0 | 10 | 0 |
| NABTS, NTSC | 080 | AA | AA | FF | FF | E7 | 2E | 20 | 22 | 69 | 93 | 0D | 0 | 0 | 0 | 15 | 0 |
| NABTS, NTSC | 090 | AA | AA | FF | FF | E7 | 2E | 20 | 22 | 69 | 93 | 0D | 0 | 0 | 0 | 15 | 0 |
| NABTS, NTSC-J | 0A0 | AA | AA | FF | FF | A7 | 2E | 20 | 23 | 69 | 93 | 0D | 0 | 0 | 0 | 10 | 0 |
| NABTS, NTSC-J | 0B0 | AA | AA | FF | FF | A7 | 2E | 20 | 23 | 69 | 93 | 0D | 0 | 0 | 0 | 10 | 0 |
| CC, PAL/SECAM | 0C0 | AA | 2A | FF | 3F | 04 | 51 | 6E | 02 | A6 | 7B | 09 | 0 | 0 | 0 | 27 | 0 |
| CC, PAL/SECAM | 0D0 | AA | 2A | FF | 3F | 04 | 51 | 6E | 02 | A6 | 7B | 09 | 0 | 0 | 0 | 27 | 0 |
| CC, NTSC | 0E0 | AA | 2A | FF | 3F | 04 | 51 | 6E | 02 | 69 | 8C | 09 | 0 | 0 | 0 | 27 | 0 |
| CC, NTSC | 0F0 | AA | 2A | FF | 3F | 04 | 51 | 6E | 02 | 69 | 8C | 09 | 0 | 0 | 0 | 27 | 0 |
| WSS, PAL/SECAM | 100 | 5B | 55 | C5 | FF | 0 | 71 | 6E | 42 | A6 | CD | 0F | 0 | 0 | 0 | 3A | 0 |
| WSS, PAL/SECAM | 110 | 5B | 55 | C5 | FF | 0 | 71 | 6E | 42 | A6 | CD | 0F | 0 | 0 | 0 | 3A | 0 |
| WSS, NTSC C | 120 | 38 | 00 | 3F | 00 | 0 | 71 | 6E | 43 | 69 | 7C | 08 | 0 | 0 | 0 | 39 | 0 |
| WSS, NTSC C | 130 | 38 | 00 | 3F | 00 | 0 | 71 | 6E | 43 | 69 | 7C | 08 | 0 | 0 | 0 | 39 | 0 |
| VITC, PAL/SECAM | 140 | 0 | 0 | 0 | 0 | 0 | 8F | 6D | 49 | A6 | 85 | 08 | 0 | 0 | 0 | 4C | 0 |
| VITC, PAL/SECAM | 150 | 0 | 0 | 0 | 0 | 0 | 8F | 6D | 49 | A6 | 85 | 08 | 0 | 0 | 0 | 4C | 0 |
| VITC, NTSC | 160 | 0 | 0 | 0 | 0 | 0 | 8F | 6D | 49 | 69 | 94 | 08 | 0 | 0 | 0 | 4C | 0 |
| VITC, NTSC | 170 | 0 | 0 | 0 | 0 | 0 | 8F | 6D | 49 | 69 | 94 | 08 | 0 | 0 | 0 | 4C | 0 |
| VPS, PAL | 180 | AA | AA | FF | FF | BA | CE | 2B | 0D | A6 | DA | 0B | 0 | 0 | 0 | 60 | 0 |
| VPS, PAL | 190 | AA | AA | FF | FF | BA | CE | 2B | 0D | A6 | DA | 0B | 0 | 0 | 0 | 60 | 0 |
| Custom 1 | 1A0 | Programmable | | | | | | | | | | | | | | | |
| Custom 1 | 1B0 | Programmable | | | | | | | | | | | | | | | |
| Custom 2 | 1C0 | Programmable | | | | | | | | | | | | | | | |
| Custom 2 | 1D0 | Programmable | | | | | | | | | | | | | | | |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.59 VDP Status Register

Address C6h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------|------------|---------------|----------------------|----------------------|---------------|---------------|----------------|
| FIFO full error | FIFO empty | TTX available | CC field 1 available | CC field 2 available | WSS available | VPS available | VITC available |

The VDP status register indicates whether data is available in either the FIFO or data registers, and status information about the FIFO. Reading data from the corresponding register does not clear the status flags automatically. These flags are only reset by writing a 1 to the respective bit. However, bit 6 is updated automatically.

FIFO full error

- 0 = No FIFO full error
- 1 = FIFO was full during a write to FIFO.

The FIFO full error flag is set when the current line of VBI data can not enter the FIFO. For example, if the FIFO has only ten bytes left and teletext is the current VBI line, the FIFO full error flag is set, but no data is written because the entire teletext line does not fit. However, if the next VBI line is closed caption requiring only two bytes of data plus the header, this goes into the FIFO, even if the full error flag is set.

FIFO empty

- 0 = FIFO is not empty.
- 1 = FIFO is empty.

TTX available

- 0 = Teletext data is not available.
- 1 = Teletext data is available.

CC field 1 available

- 0 = Closed caption data from field 1 is not available.
- 1 = Closed caption data from field 1 is available.

CC field 2 available

- 0 = Closed caption data from field 2 is not available.
- 1 = Closed caption data from field 2 is available.

WSS available

- 0 = WSS data is not available.
- 1 = WSS data is available.

VPS available

- 0 = VPS data is not available.
- 1 = VPS data is available.

VITC available

- 0 = VITC data is not available.
- 1 = VITC data is available.

3.20.60 FIFO Word Count Register

Address C7h

| | | | | | | | |
|-----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Number of words | | | | | | | |

This register provides the number of words in the FIFO. One word equals two bytes.

3.20.61 FIFO Interrupt Threshold Register

Address C8h

Default 80h

| | | | | | | | |
|-----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Number of words | | | | | | | |

This register is programmed to trigger an interrupt when the number of words in the FIFO exceeds this value (default 80h). This interrupt must be enabled at address C1h. One word equals two bytes.

3.20.62 FIFO Reset Register

Address C9h

Default 00h

| | | | | | | | |
|----------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Any data | | | | | | | |

Writing any data to this register resets the FIFO and clears any data present in all VBI read registers.

3.20.63 Line Number Interrupt Register

Address CAh

Default 00h

| | | | | | | | |
|----------------|----------------|-------------|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Field 1 enable | Field 2 enable | Line number | | | | | |

This register is programmed to trigger an interrupt when the video line number matches this value in bits 5:0. This interrupt must be enabled at address C1h. The value of 0 or 1 does not generate an interrupt.

Field 1 enable

0 = Disabled (default)

1 = Enabled

Field 2 enable

0 = Disabled (default)

1 = Enabled

Line number default is 00h.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

3.20.64 Pixel Alignment Registers

Address CBh CCh
Default 4Eh 00h

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|---------|--------------------|---|---|---|---|---|--------------------|---|--|
| CBh | Switch pixel [7:0] | | | | | | | | |
| CCh | Reserved | | | | | | Switch pixel [9:8] | | |

These registers form a 10-bit horizontal pixel position from the falling edge of sync, where the VDP controller initiates the program from one line standard to the next line standard; for example, the previous line of teletext to the next line of closed caption. This value must be set so that the switch occurs after the previous transaction has cleared the delay in the VDP, but early enough to allow the new values to be programmed before the current settings are required.

3.20.65 FIFO Output Control Register

Address CDh
Default 01h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|---|---|--------------------|
| Reserved | | | | | | | Host access enable |

This register is programmed to allow I²C access to the FIFO or allowing all VDP data to go out the video port.

Host access enable

0 = Output FIFO data to the video output Y[7:0]

1 = Allow I²C access to the FIFO data (default)

3.20.66 Full Field Enable Register

Address CFh
Default 00h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|---|---|---|---|---|---|-------------------|
| Reserved | | | | | | | Full field enable |

This register enables the full field mode. In this mode, all lines outside the vertical blank area and all lines in the line mode registers programmed with FFh are sliced with the definition of register FCh. Values other than FFh in the line mode registers allow a different slice mode for that particular line.

Full field enable

0 = Disable full field mode (default)

1 = Enable full field mode

3.20.67 Line Mode Registers

Address D0h FBh D1h
 Default 00h FFh

| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|---|---|-----------------|
| D0 | | | | | | | | Line 6 Field 1 |
| D1 | | | | | | | | Line 6 Field 2 |
| D2 | | | | | | | | Line 7 Field 1 |
| D3 | | | | | | | | Line 7 Field 2 |
| D4 | | | | | | | | Line 8 Field 1 |
| D5 | | | | | | | | Line 8 Field 2 |
| D6 | | | | | | | | Line 9 Field 1 |
| D7 | | | | | | | | Line 9 Field 2 |
| D8 | | | | | | | | Line 10 Field 1 |
| D9 | | | | | | | | Line 10 Field 2 |
| DA | | | | | | | | Line 11 Field 1 |
| DB | | | | | | | | Line 11 Field 2 |
| DC | | | | | | | | Line 12 Field 1 |
| DD | | | | | | | | Line 12 Field 2 |
| DE | | | | | | | | Line 13 Field 1 |
| DF | | | | | | | | Line 13 Field 2 |
| E0 | | | | | | | | Line 14 Field 1 |
| E1 | | | | | | | | Line 14 Field 2 |
| E2 | | | | | | | | Line 15 Field 1 |
| E3 | | | | | | | | Line 15 Field 2 |
| E4 | | | | | | | | Line 16 Field 1 |
| E5 | | | | | | | | Line 16 Field 2 |
| E6 | | | | | | | | Line 17 Field 1 |
| E7 | | | | | | | | Line 17 Field 2 |
| E8 | | | | | | | | Line 18 Field 1 |
| E9 | | | | | | | | Line 18 Field 2 |
| EA | | | | | | | | Line 19 Field 1 |
| EB | | | | | | | | Line 19 Field 2 |
| EC | | | | | | | | Line 20 Field 1 |
| ED | | | | | | | | Line 20 Field 2 |
| EE | | | | | | | | Line 21 Field 1 |
| EF | | | | | | | | Line 21 Field 2 |
| F0 | | | | | | | | Line 22 Field 1 |
| F1 | | | | | | | | Line 22 Field 2 |
| F2 | | | | | | | | Line 23 Field 1 |
| F3 | | | | | | | | Line 23 Field 2 |
| F4 | | | | | | | | Line 24 Field 1 |
| F5 | | | | | | | | Line 24 Field 2 |
| F6 | | | | | | | | Line 25 Field 1 |
| F7 | | | | | | | | Line 25 Field 2 |
| F8 | | | | | | | | Line 26 Field 1 |
| F9 | | | | | | | | Line 26 Field 2 |
| FA | | | | | | | | Line 27 Field 1 |
| FB | | | | | | | | Line 27 Field 2 |

These registers program the specific VBI standard at a specific line in the video field.

Bit 7

- 0 = Disable filtering of null bytes in closed caption modes
- 1 = Enable filtering of null bytes in closed caption modes (default)

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

In teletext modes, bit 7 enables the data filter function for that particular line. If it is set to 0, the data filter passes all data on that line.

Bit 6

- 0 = Send VBI data to registers only
- 1 = Send VBI data to FIFO and the registers. Teletext data only goes to FIFO (default).

Bit 5

- 0 = Allow VBI data with errors in the FIFO
- 1 = Do not allow VBI data with errors in the FIFO (default)

Bit 4

- 0 = Do not enable error detection and correction
- 1 = Enable error detection and correction (when bits [3:0] = 1 2, 3, and 4 only) (default)

Bits [3:0]

- 0000 = WST SECAM
- 0001 = WST PAL B
- 0010 = WST PAL C
- 0011 = WST NTSC
- 0100 = NABTS NTSC
- 0101 = TTX NTSC
- 0110 = CC PAL
- 0111 = CC NTSC
- 1000 = WSS PAL
- 1001 = WSS NTSC
- 1010 = VITC PAL
- 1011 = VITC NTSC
- 1100 = VPS PAL
- 1101 = Custom 1
- 1110 = Custom 2
- 1111 = Active video (VDP off) (default)

A value of FFh in the line mode registers is required for any line to be sliced as part of the full field mode.

3.20.68 Full Field Mode Register

Address FCh
 Default 7Fh

| | | | | | | | |
|-----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Full field mode | | | | | | | |

This register programs the specific VBI standard for full field mode. It can be any VBI standard. Individual line settings take priority over the full field register. This allows each VBI line to be programmed independently but have the remaining lines in full field mode. The full field mode register has the same definitions as the line mode registers (default 7Fh).

4 Electrical Specifications

4.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

| | | |
|---|----------------------|----------------|
| Supply voltage range | IO_DVDD to DGND | 0-5 V to 4.5 V |
| | DVDD to DGND | 0-5 V to 2.3 V |
| | PLL_AVDD to PLL_AGND | 0-5 V to 2.3 V |
| | CH_AVDD to CH_AGND | 0-5 V to 2.3 V |
| Digital input voltage range, V_I to DGND | | 0-5 V to 4.5 V |
| Input voltage range, XTAL1 to PLL_GND | | 0-5 V to 2.3 V |
| Analog input voltage range A_I to CH_AGND | | 0-2 V to 2.0 V |
| Digital output voltage range, V_O to DGND | | 0-5 V to 4.5 V |
| Operating free-air temperature, T_A | Commercial | 0°C to 70°C |
| | Industrial | 40 °C to 85°C |
| Storage temperature range, T_{stg} | | 65 °C to 150°C |

4.2 Recommended Operating Conditions

| | | MIN | NOM | MAX | UNIT |
|----------------|--|--------------|--------------|------|------|
| IO_DVDD | Digital I/O supply voltage | 3.0 | 3.3 | 3.6 | V |
| DVDD | Digital supply voltage | 1.65 | 1.8 | 1.95 | V |
| PLL_AVDD | Analog PLL supply voltage | 1.65 | 1.8 | 1.95 | V |
| CH_AVDD | Analog core supply voltage | 1.65 | 1.8 | 1.95 | V |
| $V_{I(P-P)}$ | Analog input voltage (ac-coupling necessary) | 0 | | 0.75 | V |
| V_{IH} | Digital input voltage high | 0.7 IO_DVDD | | | V |
| V_{IL} | Digital input voltage low | | 0.3 IO_DVDD | | V |
| V_{IH_XTAL} | XTAL input voltage high | 0.7 PLL_AVDD | | | V |
| V_{IL_XTAL} | XTAL input voltage low | | 0.3 PLL_AVDD | | V |
| I_{OH} | High-level output current | | | 2 | mA |
| I_{OL} | Low-level output current | | | 2– | mA |
| I_{OH_SCLK} | SCLK high-level output current | | | 4 | mA |
| I_{OL_SCLK} | SCLK low-level output current | | | 4– | mA |
| T_A | Operating free-air temperature | Commercial | 0 | 70 | °C |
| | | Industrial | 40 | 85 | |

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

4.3 Electrical Characteristics

DVDD = 1.8 V, PLL_AVDD = 1.8 V, CH_AVDD = 1.8 V, IO_DVDD = 3.3 V

For minimum/maximum values $T_A = 0^\circ\text{C}$ to 70°C for commercial or $T_A = -40^\circ\text{C}$ to 85°C for industrial, for typical values $T_A = 25^\circ\text{C}$ (unless otherwise noted)

4.3.1 DC Electrical Characteristics

| PARAMETER | | TEST CONDITIONS ⁽¹⁾ | MIN | TYP | MAX | UNIT |
|------------------|---|--------------------------------|-------------|--------------|----------|---------------|
| $I_{DD(I/O_D)}$ | 3.3-V I/O digital supply current | Color bar input ⁽²⁾ | | 4.8 | 6.2 | mA |
| $I_{DD(D)}$ | 1.8-V digital supply current | Color bar input ⁽²⁾ | | 25.3 | 32.9 | mA |
| $I_{DD(PLL_A)}$ | 1.8-V analog PLL supply current | Color bar input ⁽²⁾ | | 5.4 | 7.1 | mA |
| $I_{DD(CH_A)}$ | 1.8-V analog core supply current | Color bar input ⁽²⁾ | | 24.4 | 31.7 | mA |
| P_{TOT} | Total power dissipation, normal mode | Color bar input ⁽²⁾ | | 115 | 150 | mW |
| P_{DOWN} | Total power dissipation, power-down mode ⁽³⁾ | Color bar input | | | 1 | mW |
| C_i | Input capacitance | By design | | 8 | | pF |
| V_{OH} | Output voltage high | $I_{OH} = 2\text{ mA}$ | 0.8 IO_DVDD | | | V |
| V_{OL} | Output voltage low | $I_{OL} = 2\text{ mA}$ | | 0.22 IO_DVDD | | V |
| V_{OH_SCLK} | SCLK output voltage high | $I_{OH} = 4\text{ mA}$ | 0.8 IO_DVDD | | | V |
| V_{OL_SCLK} | SCLK output voltage low | $I_{OL} = 4\text{ mA}$ | | 0.22 IO_DVDD | | V |
| I_{IH} | High-level input current ⁽⁴⁾ | $V_I = V_{IH}$ | | | ± 20 | μA |
| I_{IL} | Low-level input current ⁽⁴⁾ | $V_I = V_{IL}$ | | | ± 20 | μA |

(1) Measured with a load of 15 pF

(2) For typical measurements only

(3) Assured by device characterization

(4) YOUT7 is a bidirectional terminal with an internal pulldown resistor. This terminal may sink more than the specified current when in RESET mode.

4.3.2 Analog Electrical Characteristics

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------|--|-----------------------------------|-----|-----------|-----------|------------|
| Z_i | Input impedance, analog video inputs | By design | | 500 | | k Ω |
| C_i | Input capacitance, analog video inputs | By design | | 10 | | pF |
| $V_{i(pp)}$ | Input voltage range ⁽¹⁾ | $C_{coupling} = 0.1\ \mu\text{F}$ | 0 | | 0.75 | V |
| ΔG | Gain control maximum | | | 12 | | dB |
| ΔG | Gain control minimum | | | 0 | | dB |
| DNL | DC differential nonlinearity | A/D only | | ± 0.5 | ± 1 | LSB |
| INL | DC integral nonlinearity | A/D only | | ± 1 | ± 2.5 | LSB |
| F_r | Frequency response | 6 MHz, Specified by design | | 0-9 | 3- | dB |
| SNR | Signal-to-noise ratio | 6 MHz, 1.0 $V_{p,p}$ | | 50 | | dB |
| NS | Noise spectrum | 50% flat field | | 50 | | dB |
| DP | Differential phase | | | 1.5 | | $^\circ$ |
| DG | Differential gain | | | 0.5 | | % |

(1) The 0.75-V maximum applies to the sync-chroma amplitude, not sync-white. The recommended termination resistors are 37.4 Ω , as seen in Section 6.

4.3.3 Clocks, Video Data, Sync Timing

| PARAMETER | | TEST CONDITIONS ⁽¹⁾ | MIN | TYP | MAX | UNIT |
|------------------|-------------------|--------------------------------|------|------|------|------|
| Duty cycle, PCLK | | | | 50 | | % |
| t1 | PCLK high time | $\geq 90\%$ | 13.4 | 14.5 | 16.4 | ns |
| t2 | PCLK low time | $\leq 10\%$ | 13.4 | 14.5 | 16.4 | ns |
| t3 | PCLK fall time | 90% to 10% | 2 | 4 | 5 | ns |
| t4 | PCLK rise time | 10% to 90% | 2 | 4 | 5 | ns |
| t5 | Output hold time | | 2 | | | ns |
| t6 | Output delay time | | | 3 | 8 | ns |

(1) Measured with a load of 15 pF. Specified by design.

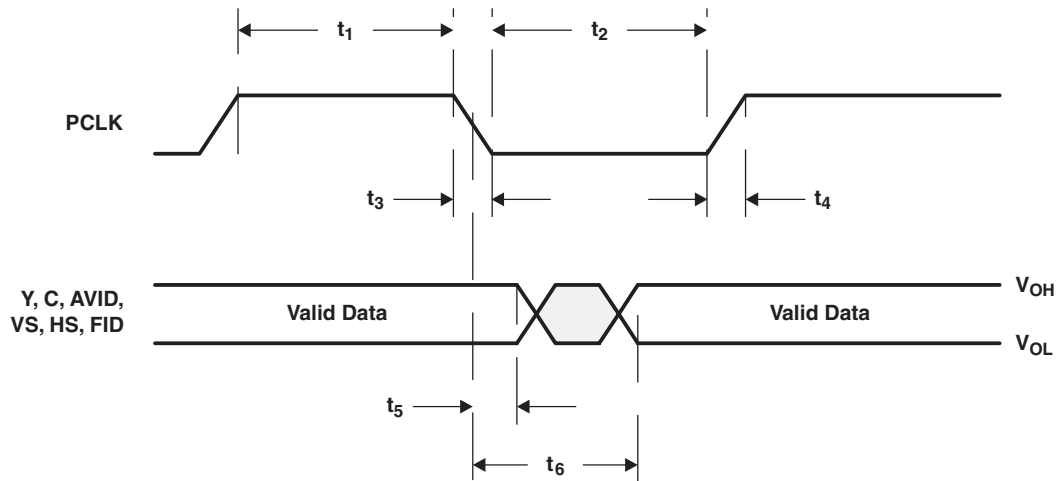


Figure 4-1. Clocks, Video Data, and Sync Timing

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

4.3.4 I²C Host Port Timing⁽¹⁾

| PARAMETER | | MIN | TYP | MAX | UNIT |
|------------------|---|-----|-----|-----|------|
| t1 | Bus free time between Stop and Start | 1.3 | | | μs |
| t2 | Setup time for a (repeated) Start condition | 0.6 | | | μs |
| t3 | Hold time (repeated) Start condition | 0.6 | | | μs |
| t4 | Setup time for a Stop condition | 0.6 | | | ns |
| t5 | Data setup time | 100 | | | ns |
| t6 | Data hold time | 0 | | 0.9 | μs |
| t7 | Rise time, VC1(SDA) and VC0(SCL) signal | 250 | | | ns |
| t8 | Fall time, VC1(SDA) and VC0(SCL) signal | | 250 | | ns |
| C _b | Capacitive load for each bus line | | | 400 | pF |
| f _{I2C} | I ² C clock frequency | | | 400 | kHz |

(1) Specified by design

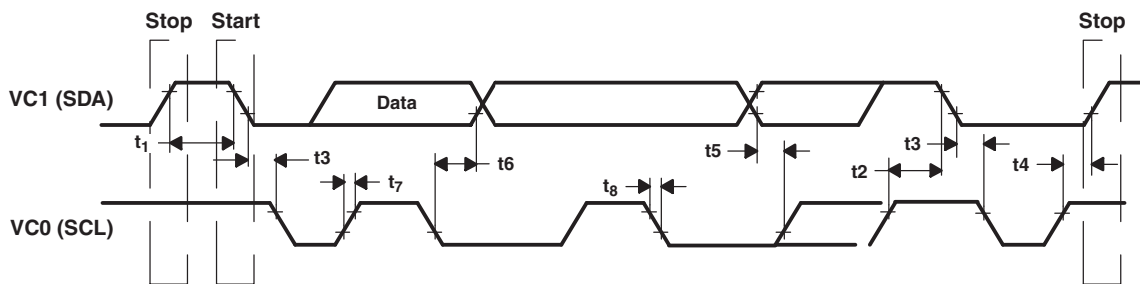


Figure 4-2. I²C Host Port Timing

5 Example Register Settings

The following example register settings are provided only as a reference. These settings, given the assumed input connector, video format, and output format, set up the TVP5150AM1 decoder and provide video output. Example register settings for other features and the VBI data processor are not provided here.

5.1 Example 1

5.1.1 Assumptions

Device: TVP5150AM1

Input connector: Composite (AIP1A)

Video format: NTSC-M, PAL (B, G, H, I), or SECAM

NOTE

NTSC-443, PAL-N, and PAL-M are masked from the autoswitch process by default. See the autoswitch mask register at address 04h.

Output format: 8-bit ITU-R BT.656 with embedded syncs

5.1.2 Recommended Settings

Recommended I²C writes: For this setup, only one write is required. All other registers are set up by default.

I²C register address 03h = Miscellaneous controls register address

I²C data 09h = Enables YCbCr output and the clock output

NOTE

HSYNC, VSYNC/PALI, AVID, and FID/GLCO are high impedance by default. See the miscellaneous control register at address 03h.

Ultralow-Power NTSC/PAL/SECAM Video Decoder

SLES209A–NOVEMBER 2007–REVISED AUGUST 2009

5.2 Example 2

5.2.1 Assumptions

Device: TVP5150AM1

Input connector: S-video (AIP1A (luma), AIP1B (chroma))

Video format: NTSC-M, 443, PAL (B, G, H, I, M, N) or SECAM (B, D, G, K, KI, L)

Output format: 8-bit 4:2:2 YCbCr with discrete sync outputs

5.2.2 Recommended Settings

Recommended I²C writes: This setup requires additional writes to output the discrete sync 4:2:2 data outputs, the HSYNC, and the VSYNC, and to autoswitch between all video formats mentioned above.

I²C register address 00h = Video input source selection #1 register

I²C data 01h = Selects the S-Video input, AIP1A (luma), and AIP1B (chroma)

I²C register address 03h = Miscellaneous controls register address

I²C data 0Dh = Enables the YCbCr output data, HSYNC, VSYNC/PALI, AVID, and FID/GLCO

I²C register address 04h = Autoswitch mask register


I²C data C0h = Unmask NTSC-443, PAL-N, and PAL-M from the autoswitch process

I²C register address 0Dh = Outputs and data rates select register

I²C data 40h = Enables 8-bit 4:2:2 YCbCr with discrete sync output

6 Application Information

6.1 Application Example

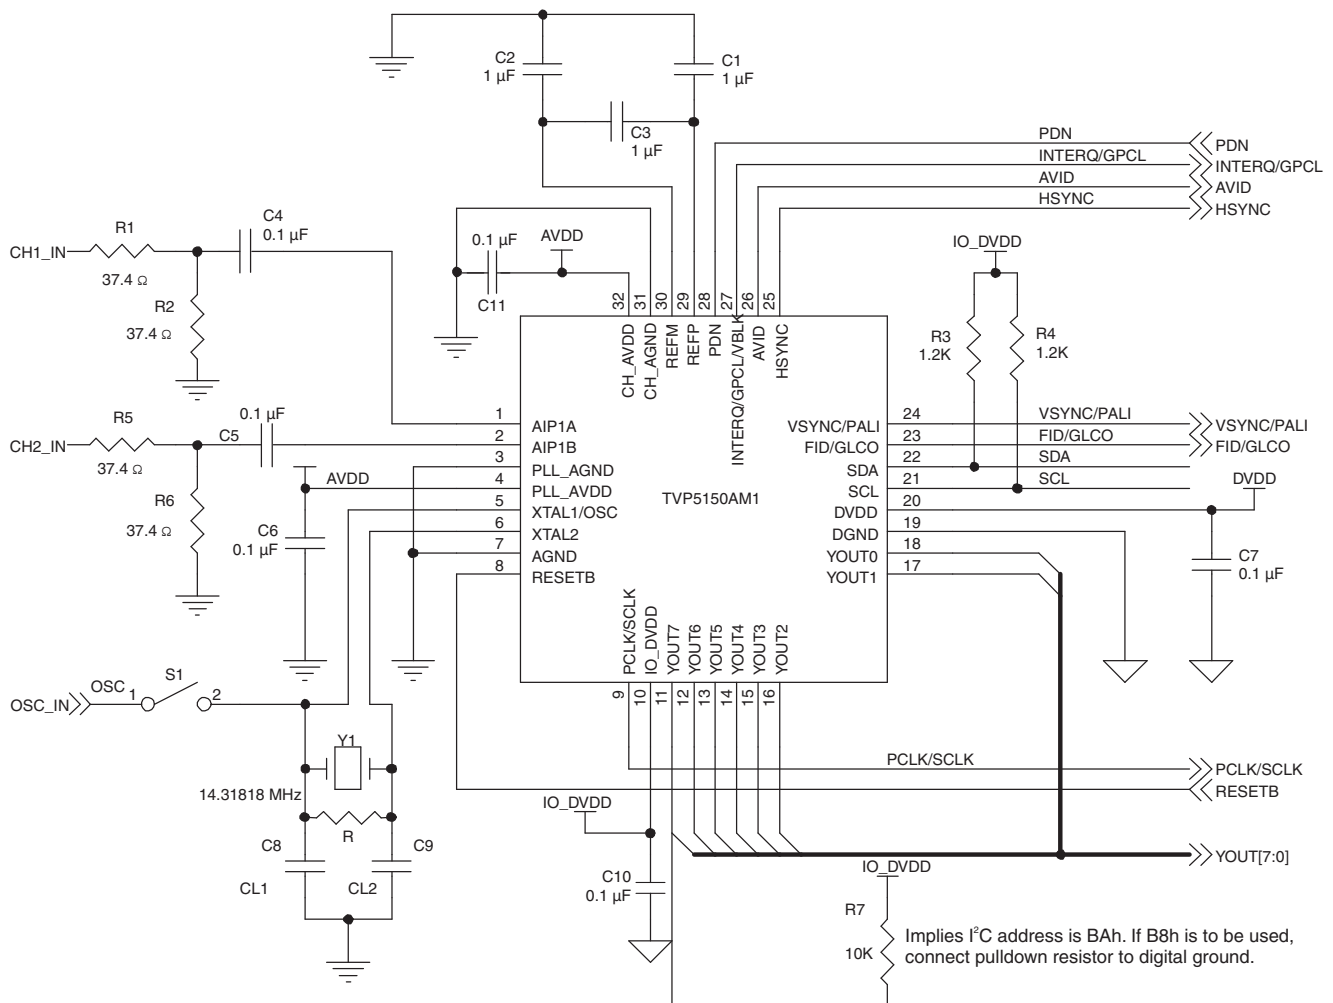

- The use of INTERQ/GPCL/AVID/HSYNC and VSYNC is optional. These are outputs and can be left floating.
- When OSC is connected through S1, remove the capacitors for the crystal.
- PDN needs to be high, if device has to be always operational.
- RESETB is operational only when PDN is high. This allows an active low reset to the device.
- Resistor in parallel with the crystal may or may not be required depending on the crystal used.

Figure 6-1. Application Example

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|----------------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TVP5150AM1IPBS | ACTIVE | TQFP | PBS | 32 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| TVP5150AM1IPBSQ1 | ACTIVE | TQFP | PBS | 32 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| TVP5150AM1IPBSR | ACTIVE | TQFP | PBS | 32 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| TVP5150AM1IPBSRQ | ACTIVE | TQFP | PBS | 32 | 1000 | TBD | Call TI | Call TI |
| TVP5150AM1IZQC | ACTIVE | BGA MICROSTAR JUNIOR | ZQC | 48 | 360 | Green (RoHS & no Sb/Br) | SNAGCU | Level-3-260C-168 HR |
| TVP5150AM1IZQCR | ACTIVE | BGA MICROSTAR JUNIOR | ZQC | 48 | 2500 | Green (RoHS & no Sb/Br) | SNAGCU | Level-3-260C-168 HR |
| TVP5150AM1PBS | ACTIVE | TQFP | PBS | 32 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| TVP5150AM1PBSR | ACTIVE | TQFP | PBS | 32 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| TVP5150AM1ZQC | ACTIVE | BGA MICROSTAR JUNIOR | ZQC | 48 | 360 | Pb-Free (RoHS) | SNAGCU | Level-3-260C-168 HR |
| TVP5150AM1ZQCR | ACTIVE | BGA MICROSTAR JUNIOR | ZQC | 48 | 2500 | Pb-Free (RoHS) | SNAGCU | Level-3-260C-168 HR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on

incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TVP5150AM1 :


- Enhanced Product: [TVP5150AM1-EP](#)

NOTE: Qualified Version Definitions:

- Enhanced Product - Supports Defense, Aerospace and Medical Applications

ZQC (S-PBGA-N48)

PLASTIC BALL GRID ARRAY

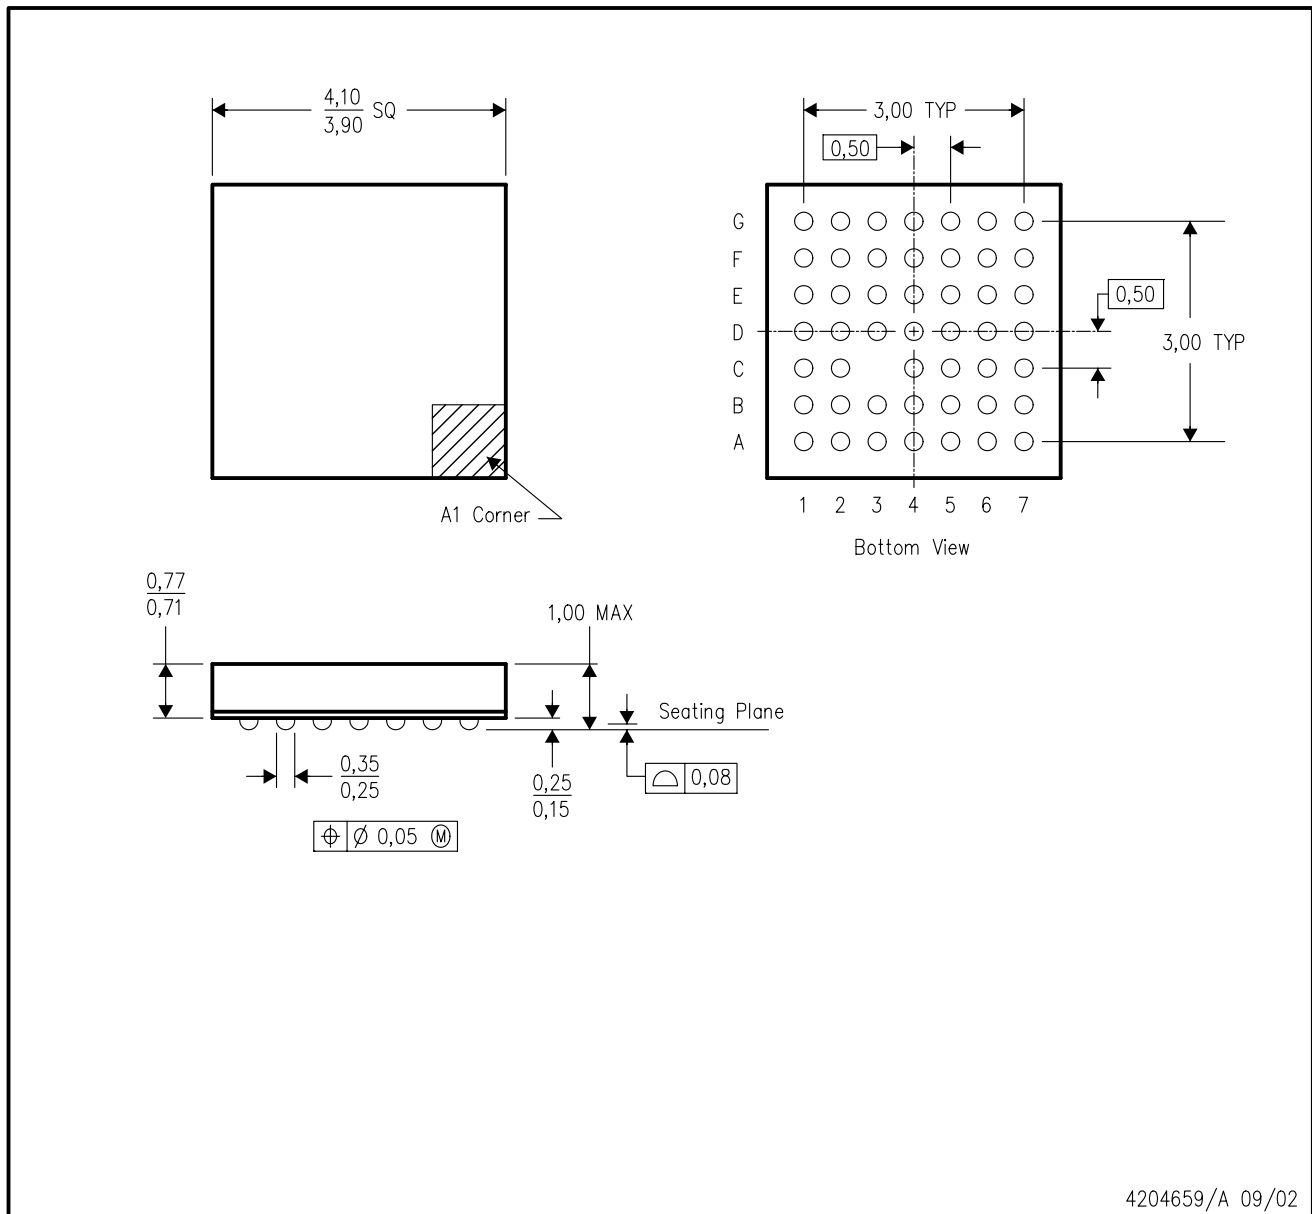


- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. MicroStar Junior™ BGA configuration
 - D. Falls within JEDEC MO-225
 - E. This package is lead-free.

MicroStar Junior is a trademark of Texas Instruments.

PBS (S-PQFP-G32)

PLASTIC QUAD FLATPACK

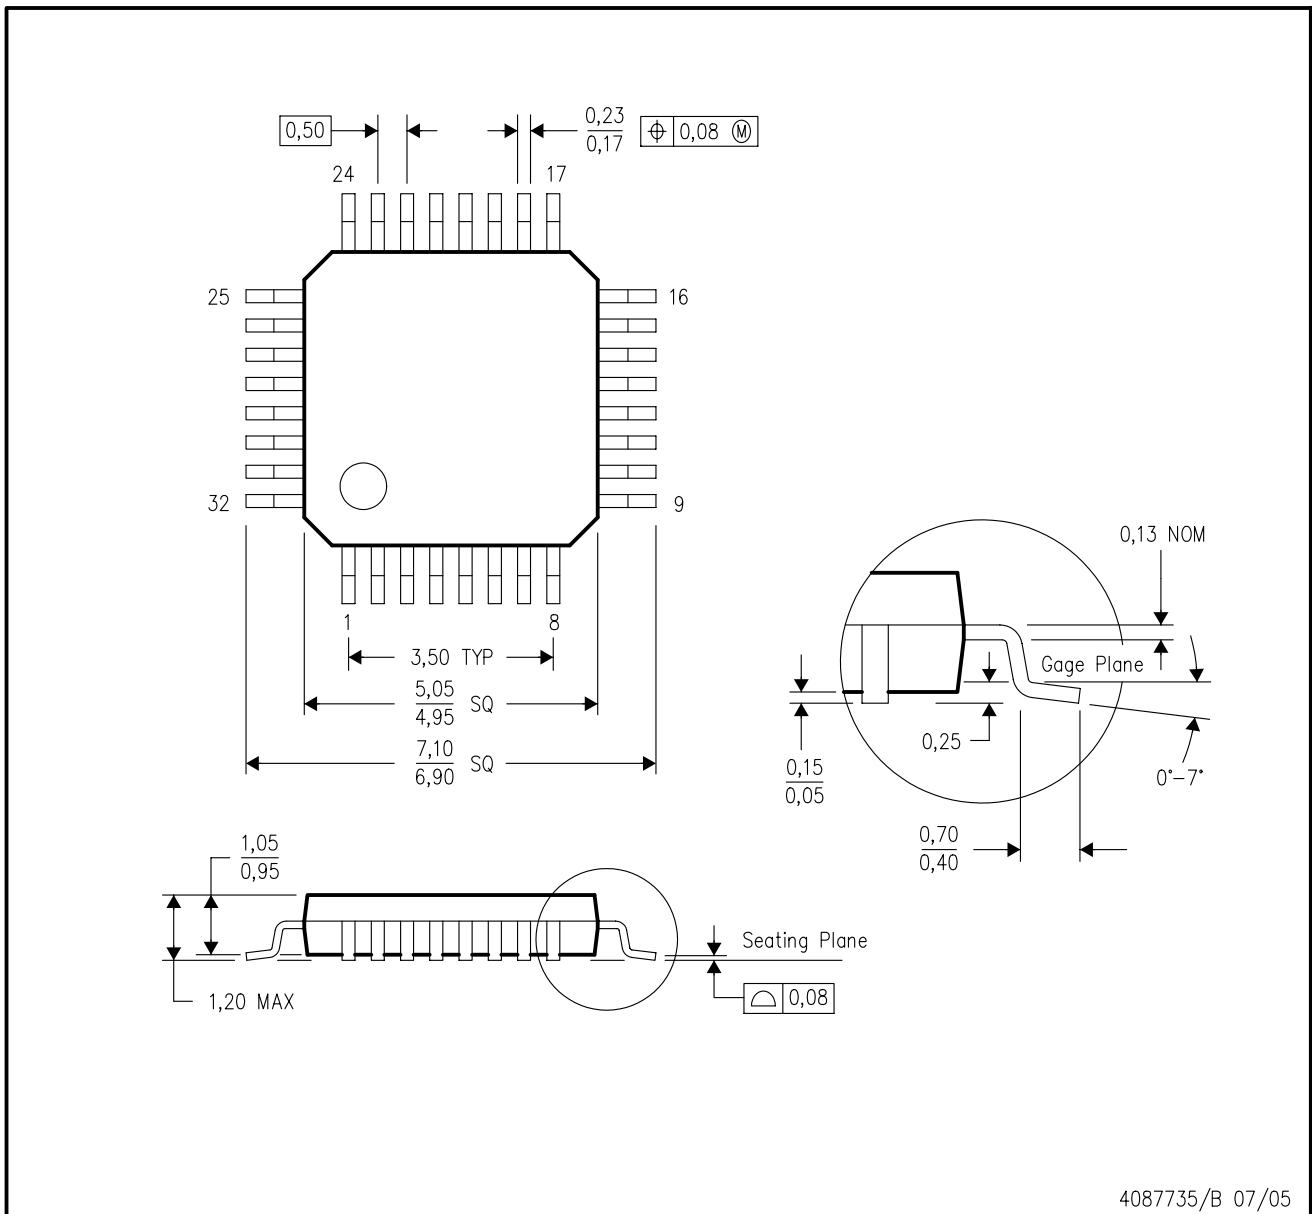

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.