

查询DG424供应商

INTERSIL

捷多邦，专业PCB打样工厂，24小

时加急出货

DG426/A, DG429/A, DG433/A, DG434/A, DG440/A, DG441/A, DG451/A, DG452/A, DG453/A, DG454/A 2-Channel Drivers with SPST and DPST FET Switches

FEATURES

- Each channel complete—interfaces with most integrated logic
- Low OFF power dissipation, -1mW
- Switches analog signals up to 16 volts peak-to-peak
- Low $r_{DS(ON)}$, 15 ohms max on DG440/A and DG441/A
- Switching times improved 100%—"A" versions



GENERAL DESCRIPTION

These switching circuits contain two channels in one package, each channel consisting of a driver circuit controlling a SPST or DPST junction FET switch. The driver interfaces DTL, TTL or RTL logic signals for multiplexing, commutating, and D/A converter applications, which permits logic design directly with the switch function. Logic "1" at the input turns the FET switch ON, and logic "0" turns it OFF.

SCHEMATIC & LOGIC DIAGRAMS (Outline Dwgs JD, FD-2)


DUAL SPST

DG433/A($r_{DS(ON)} = 35\Omega$)
DG434/A($r_{DS(ON)} = 80\Omega$)
DG441/A($r_{DS(ON)} = 15\Omega$)
DG451/A($r_{DS(ON)} = 20\Omega$)
DG452/A($r_{DS(ON)} = 100\Omega$)

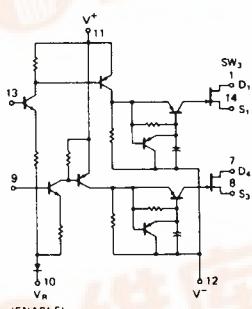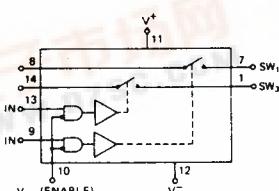

DUAL DPST

DG426/A($r_{DS(ON)} = 80\Omega$)
DG429/A($r_{DS(ON)} = 35\Omega$)
DG440/A($r_{DS(ON)} = 15\Omega$)
DG453/A($r_{DS(ON)} = 20\Omega$)
DG454/A($r_{DS(ON)} = 100\Omega$)

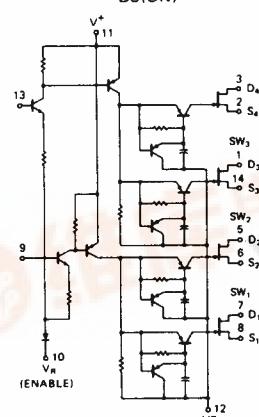

ORDERING INFORMATION

DG426 A C L

Package

L - 14-Pin Flatpak

P - 14-Pin Ceramic DIP (Special Order Only)

K - 14-Pin Cerdip

Commercial Temperature Range
(0°C to +70°C)

Option

Device Type Number

DG426/A Family

INTERS

ABSOLUTE MAXIMUM RATINGS

Analog Signal Voltage ($V_A - V^-$ or $V^+ - V_A$)	28V
Total Supply Voltage ($V^+ - V^-$)	32V
Pos. Supply Voltage to Ref. Voltage ($V^+ - V_R$)	18V
Ref. Voltage to Neg. Supply Voltage ($V_R - V^-$)	21V
Power Dissipation (Note)	750 mW
Current (any terminal)	30 mA

Storage Temperature -65 to +150°C

Operating Temperature -65 to +150°C

Lead Temperature (soldering, 10 sec.) 300°C

NOTE: Dissipation rating assumes device is mounted with all leads welded or soldered to printed circuit board in ambient temperature below 70°C.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

3

ELECTRICAL CHARACTERISTICS PER CHANNEL

Applied voltages for all tests: DG426, DG429, DG433, DG434, DG440, DG441, ($V^+ = +12V$, $V^- = -18V$, $V_R = 0$) and DG452, DG453, DG454 ($V^+ = +15V$, $V^- = -15V$, $V_R = 0$). Input test condition which guarantees FET switch ON and OFF specified is used for output and power supply specifications.

S Y N P U T	SYMBOL (NOTE)	CHARACTERISTIC	TYPE	ABSOLUTE MAX. LIMIT			UNITS	TEST CONDITIONS
				0°	25°	70°		
I N P U T	$V_{IN(ON)}$	Input Voltage-On	All Circuits	2.9 min	2.5 min	2.0 min	Volts	$V_2 = -12V$
	$V_{IN(OFF)}$	Input Voltage-Off		1.4	1.0	0.8	Volts	$V_2 = -12V$
	$I_{IN(ON)}$	Input Current		150	100	100	μA	$V_{IN} = 2.5V$
	$I_{IN(OFF)}$	Input Leakage Current		4	4	10	μA	$V_{IN} = 0.8V$
S W I T C H	$r_{DS(ON)}$	Drain-Source On Resistance	DG426/A	80	80	130	Ω	$V_D = 8V$, $I_S = 10 mA$
			DG429/A	35	35	50	Ω	
			DG433/A	15	15	25	Ω	
			DG440/A	20	20	30	Ω	
			DG441/A	100	100	140	Ω	$V_D = 5.5V$, $I_S = 10 mA$
O U T P U T	$I_{D(ON)} + I_{S(ON)}$	Drive Leakage Current	DG426/A		5	160	nA	$V_D = V_S = -8V$
			DG429/A		5	160	nA	$V_S = 8V$, $V_D = -8V$
			DG433/A		5	160	nA	$V_D = 8V$, $V_S = -8V$
			DG434/A		5	160	nA	$V_D = V_S = -8V$
			DG440/A		5	160	nA	$V_S = 8V$, $V_D = -8V$
			DG441/A		15	500	nA	$V_S = 8V$, $V_D = -8V$
			DG451/A		15	500	nA	$V_D = 8V$, $V_S = -8V$
			DG453/A		5	100	nA	$V_D = V_S = -5.5V$
			DG452/A		15	300	nA	$V_S = 5.5V$, $V_D = -5.5V$
			DG454/A		15	300	nA	$V_D = 5.5V$, $V_S = -5.5V$
P O W E R L Y	$I_{1(ON)}$	Positive Power Supply Drain Current	All Circuits		3.5		mA	One Driver ON, $V_{IN} = 2.5V$
					-2.0		mA	
					-1.5		mA	
					25		μA	
					-25		μA	
					25		μA	
					-25		μA	Both Drivers OFF, $V_{IN} = 0.8V$

DG426/A Family

INTERSIL



ELECTRICAL CHARACTERISTICS PER CHANNEL (cont.)

SYMBOL (NOTE)	CHARACTERISTIC	TYPE	ABSOLUTE MAX. LIMIT			UNITS	TEST CONDITIONS
			0°	25°	70°		
S W I T C H I N G	t _{ON}	Turn-On Time	DG426, DG429 DG433, DG434 DG452, DG454		1.0	μs	See Below
			DG426A, DG429A DG433A, DG434A DG452A, DG454A		0.5	0.7	
S W I T C H I N G	t _{OFF}	Turn-Off Time	DG426, DG429 DG433, DG434 DG452, DG454		2.0	μs	See Below
			DG426A, DG429A DG433A, DG434A DG452A, DG454A		1.0	1.3	
P O W E R	t _{ON}	Turn-On Time	DG440, DG441 DG451, DG453		1.5	μs	See Below
			DG440A, DG441A DG451A, DG453A		.75	1.3	
P O W E R	t _{OFF}	Turn-Off Time	DG440, DG441 DG451, DG453		2.5	μs	See Below
			DG440A, DG441A DG451A, DG453A		1.25	1.8	
P _{ON}	ON Drive Power	All Circuits			175	mW	Both Inputs V _{IN} = 2.5V
P _{OFF}	OFF Driver Power				1	mW	Both Inputs V _{IN} = 1.0V


NOTE: (OFF) and (ON) subscript notation refers to the conduction state of the FET switch for the given test.

SWITCHING TIMES (at 25°C)

DG426/A, 429/A, 433/A, 434/A,
440/A, 441/A

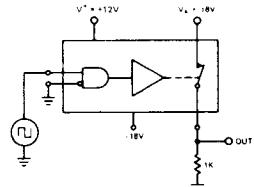
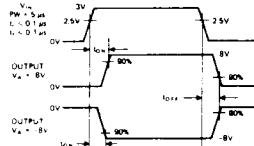


OFF MODEL

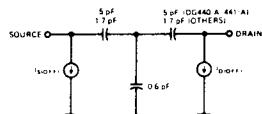


ON MODEL



DG451/A, 452/A, 453/A, 454/A

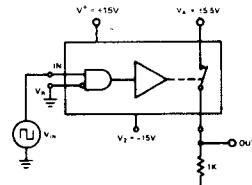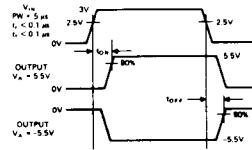

OFF MODEL

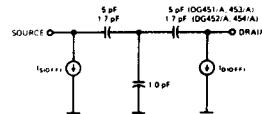

ON MODEL




DQ426/A Family


INTER

TYPICAL CHARACTERISTICS (per channel)



DG426/A, 429/A, 433/A, 434/A, 440/A, 441/A

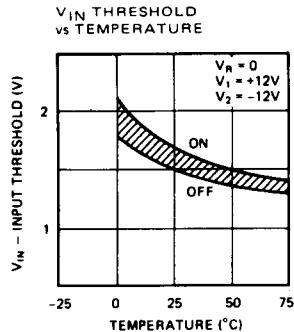

DG451/A, 452/A, 453/A, 454/A

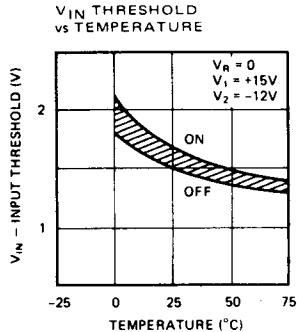

3

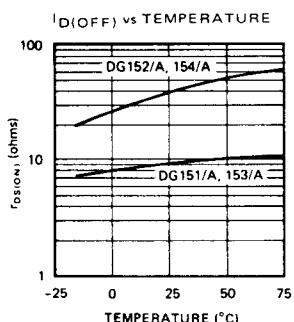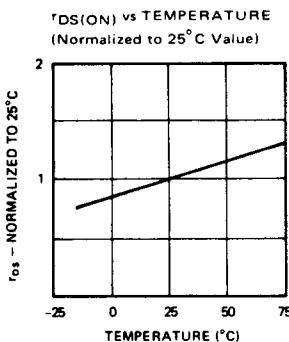

ALL CIRCUITS

