

Dalian DKE LCD Display Co.,Ltd

LCD Module User Manual  
DM 19264-01

Add.:Suite C,No.20 Liaohedong Road,DD Port, Dalian, China

Tel.: 86-411-87407737 /87407682

Fax: 86-411-87407683

E-mail:sales @ dkelcd .com

Website: <http://www.dkelcd.cn>

REVISION RECORD		
REV. NO.	DATA	REVISION ITEMS
1.0	JAN 20, 2006	First Release Version

# Contents

1.Scope-----	4
2.Warranty-----	4
3.Features-----	4
4.Mechanical Diagram-----	6
5.I/O Terminal-----	7
6. Quality Level-----	10
7.Reliability-----	13
8.Handling Precautions-----	13
9.Precautions for Use-----	14

## 1.Scope

This manual defines general provisions as well as inspection standards for standard LCD module. If the event of unforeseen problem or unspecified items may occur, please contact the nearest supplier or our company.

## 2.Warranty

If module is not stored or used as specified in this manual, it will be void the 12- month warranty.

## 3.Features

### 3-1. Features

- (1) Display mode: Transflective type  
STN LCD
- (2) Display color: Display dots: Black  
Background:Yellow—Green
- (3) Display Fonts: Graphics Matrix
- (4)Input data: 8-bit parallel data interfaced from a MPU
- (5) Multiplex ratio: 1/64 Duty, 1/9 Bias
- (6)Viewing direction: 6 O'clock
- (7) Back light: Yellow—Green
- (8) Controller:KS0108

### 3-2. Mechanical features

Item	Specifications	Unit
Outline dimensions	100.0(W)×60.0(H) ×15.0Max.(T)	mm
Viewing Area	84.0(W)×31.0(H)	mm
Image Area	80.6(W)×26.84(H)	mm
Number of Dots	192(W) ×64(H)	mm
Dot Size	0.38(W)×0.38(H)	mm
Dot Pitch	0.42(W)×0.42(H)	mm
Weight	---	g

### 3-3. Absolute maximum ratings

Item	Symbol	Condition	Min	Max	Units
Power supply for logic	Vdd	25℃	- 0.3	7.0	V
Operating voltage for LCD	Vee	25℃	Vdd-19	Vdd+0.3	V
Input voltage	Vin	25℃	- 0.3	Vdd+0.3	V
Operating temperature	Top	---	- 20	60	℃
Storage temperature	Tstg	---	- 30	70	℃

Note:

- 1) The modules may be destroyed if they are used beyond absolute maximum ratings. In ordinary operation, it is desirable to use them within recommended operation conditions. Using the modules beyond these conditions may cause malfunction and poor reliability.
- 2) All voltage values are referenced to GND=0V.

**3-4 Electrical characteristics (VDD=5.0V, Vss=0V, Ta = 25°C)**


Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Power Voltage	Logic	Vdd	---	----	5.0	---	V
Input High Voltage		Vih1	---	0.7Vdd	---	Vdd	
		Vih2		0.7Vdd	---	Vdd	
Input Low Voltage		Vil1	---	0	---	0.3Vdd	
		Vil2		0	---	0.8	
Output Voltage	"H" Level	Voh	-loh=200uA	2.4	---	---	
	"L" Level	Vol	lol=1.6mA	---	---	0.4	
Frame Frequency		Fosc	---	---	70	---	Hz
Operating current		Idd1	1/64duty,fclk=250khz, No load	---	---	100	uA
		Idd2	Access cycle=1MHz	---	---	500	uA

Note: All the dots are in the static state.

**3-5 LED back light specifications**


Item	Unit	Standard Values			Condition
		Min.	Typ.	Max.	
Supply Voltage	V	—	4.2	---	—
Current	mA	---	150	---	---
Luminous Color	—	Yellow green			---
Operating Temp.	°C	-20 ~ +70			—
Storage Temp.	°C	-30 ~ +80			—

### 4. Mechanical Diagram

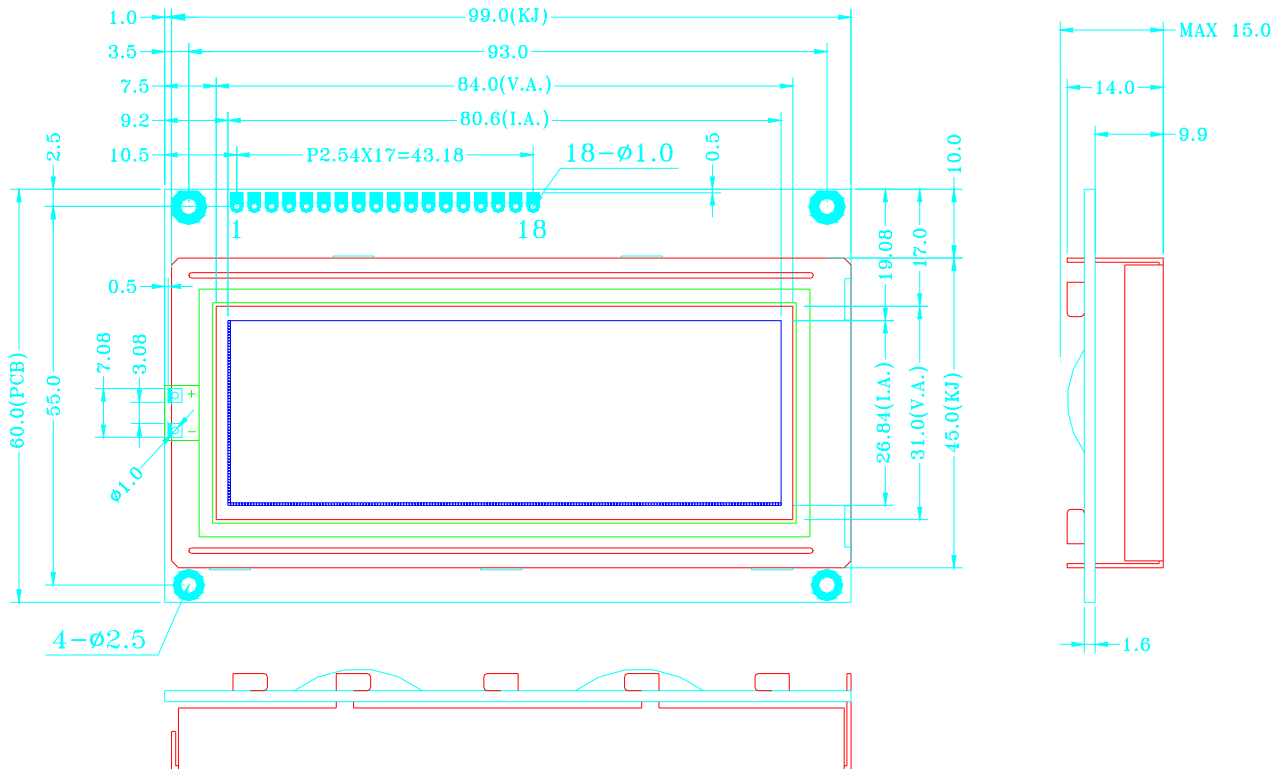

#### NOTE

- 1 TOLERANCES UNLESS OTHERWISE SPECIFIED:  $\pm 0.2$
- 2 ALL DIMENSIONS ARE IN mm
- 3 VIEWING ANGLE: 6 O'CLOCK
- 4 POLARIZER: TRANSFLECTIVE
- 5 MULTIPLEX LEVEL: 1/64 DUTY, 1/9 BIAS
- 6 POWER SUPPLY FOR LOGIC(VDD): 5.0V
- 7 POWER SUPPLY FOR LCD DRIVING(VEE): -5.0V
- 8 LCD DRIVING VOLTAGE(VDD-VEE): 9.4V
- 9 OPERATING TEMP.:  $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$   
STORAGE TEMP.:  $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- 10 DISPLAY TYPE: STN
- 11 CONNECTOR: ZEBRA & HEAT SEAL
- 12 BACKLIGHT: LED



## 5.I/O Terminal


### 5-1 I/O Connection

Pin No.	Symbol	Function
1	/CS1	This is the chip select signal.
2	/CS2	This is the chip select signal.
3	VSS	Power supply (GND)
4	VDD	Power supply (+)
5	VEE	Power supply for LCD
6	D/I	Register select signal D/I=0, Instruction register (for write) Busy flag: address counter ( for read) D/I=1, Data register (for write and read)
7	R/W	Input terminal, interfaced with MPU Data read/write R/W=1 Read ; R/W=0 Write
8	E	Enabe signal
9-16	DB0-DB7	Data bus line
17	V+	Power supply for LED (+) (+4. 2V)
18	V-	Power supply for LED (-)

### 5-2 Signal timing diagram

#### 5-2-1 Clock Timing


Parameter	Symbol	Min.	Typ.	Max.	Unit
CLK1, CLK2 Cycle Time	t <sub>CY</sub>	2.5	-	20	μs
"CLK1" "LOW" "Level Width"	t <sub>WL1</sub>	625	-	-	ns
"CLK2" "LOW" "Level Width"	t <sub>WL2</sub>	625	-	-	ns
"CLK1" "HIGH" "Level Width"	t <sub>WH1</sub>	1875	-	-	ns
"CLK2" "HIGH" "Level Width"	t <sub>WH2</sub>	1875	-	-	ns
CLK1 - CLK2 Phase Difference	t <sub>D12</sub>	625	-	-	ns
CLK2 - CLK1 Phase Difference	t <sub>D21</sub>	625	-	-	ns
CLK1, CLK2 Rise Time	t <sub>R</sub>	-	-	150	ns
CLK1, CLK2 Fall Time	t <sub>F</sub>	-	-	150	n

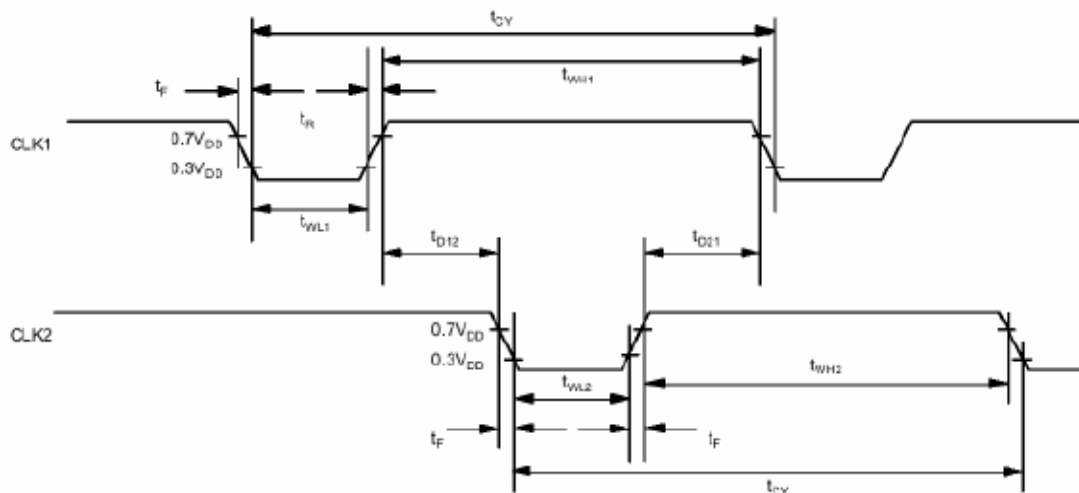

5-2-2. Display Control Timing

Parameter	Symbol	Min.	Typ.	Max.	Unit
FRM Delay Time	tDF	-2	-	+2	μs
M Delay Time	tDM	-2	-	+2	μs
"CL" "LOW" "Level Width"	tWL	35	-	-	μs
"CL" "HIGH" "Level Width"	tWH	35	-	-	μs


The display control signal waveform is given below.

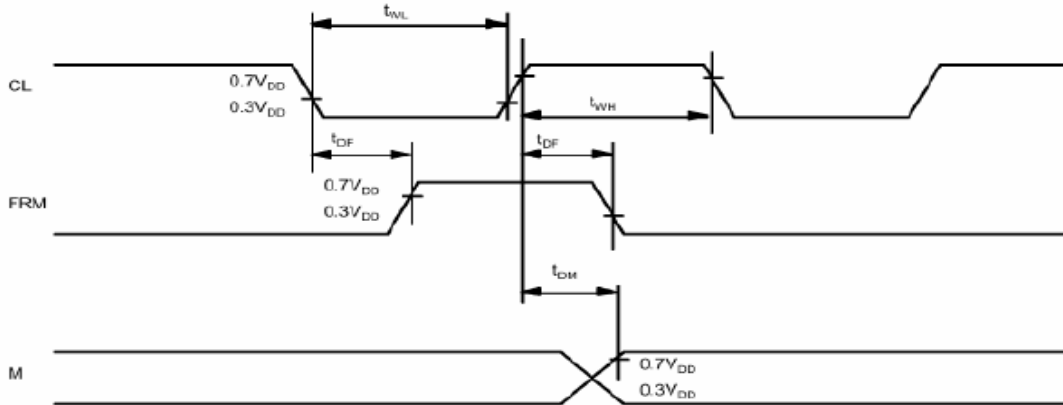

5-2-3 MPU Interface


Parameter	Symbol	Min.	Typ.	Max.	Unit
E Cycle	tC	1000	-	-	ns
E High Level Width	tWH	450	-	-	ns
E Low Level Width	tWL	450	-	-	ns
E Rise Time	tR	-	-	25	ns
E Fall Time	tF	-	-	25	ns
Address Set-up Time	tASU	140	-	-	ns
Address Hold Time	tAH	10	-	-	ns
Data Set-up Time	tSU	200	-	-	ns
Data Delay Time	tD	-	-	320	ns
Data Hold Time (Write)	tDHW	10	-	-	ns
Data Hold Time (Read)	tDHR	20	-	-	n

The MPU write timing waveform is given below.

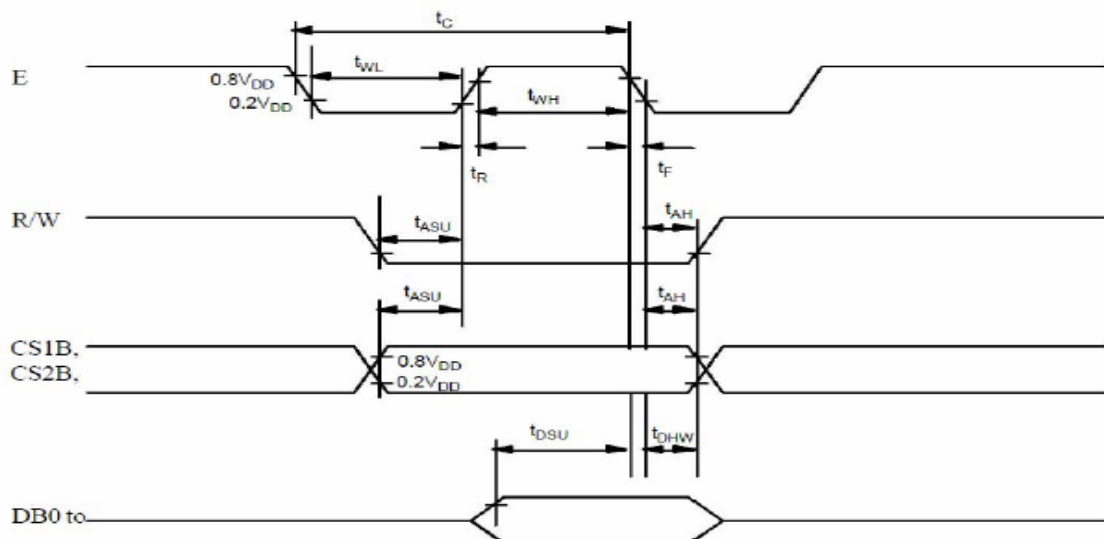



The MPU read timing waveform is shown below.

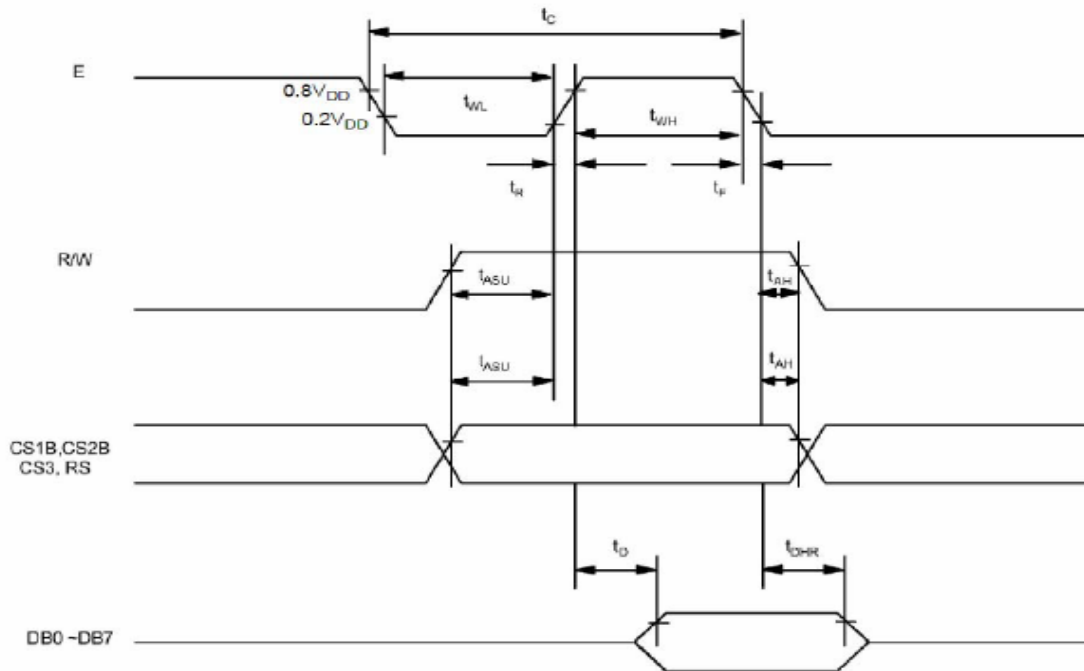

5-3. Instruction Table

Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function	
Display ON/OFF	L	L	L	L	H	H	H	H	H	L/H	Controls the display on or off. Internal status and display RAM data is not affected. L:OFF, H:ON	
Set Address (Y address)	L	L	L	H	Y address (0~63)						Sets the Y address in the Y address counter.	
Set Page (X address)	L	L	H	L	H	H	H		Page (0~7)		Sets the X address at the X address register.	
Display Start Line (Z address)	L	L	H	H	Display start line (0~63)						Indicates the display data RAM displayed at the top of the screen.	
Status Read	L	H	B U S Y	L	O N / O F F	R E S E T	L	L	L	L	Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset	
Write Display Data	H	L	Write Data									Writes data (DB0:7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read Display Data	H	H	Read Data									Reads data (DB0:7) from display data RAM to the data bus.

Note: The details of The Display Commands ,please refer to KS0108/PT6608data sheet.

## 6. Quality Level

### 6-1 Inspection conditions

6-1-1 The environmental conditions for inspection shall be as follows:


Room temperature:  $20 \pm 3^{\circ}\text{C}$

Humidity:  $65 \pm 20\% \text{ RH}$


6-1-2 The external visual inspection:

The inspection shall be performed by using a 20W fluorescent lamp for illumination and the distance between LCD and the eyes of the inspector should be at least 30cm.

(1) Light method

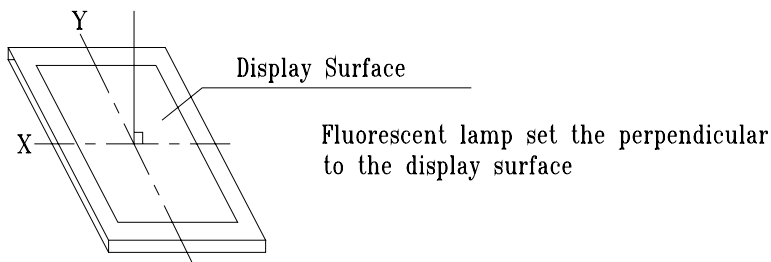

(2) Inspection distance and angle

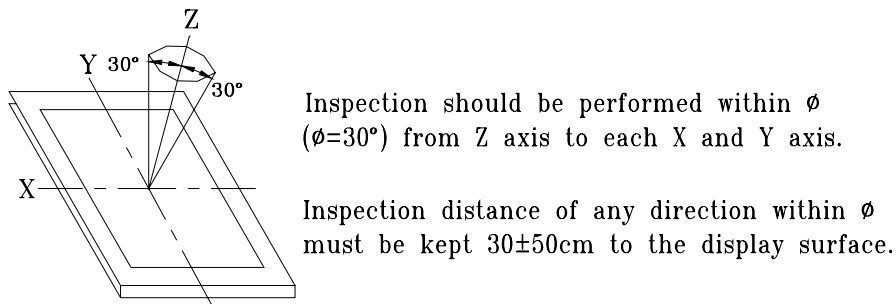

### 6-2 Sampling procedures for each item's acceptance level table

Defect type	Sampling procedure	AQL
Major defect	MIL-STD-105D Inspection Level I Normal inspection Single sample inspection	Q/DKE-07-2006(1)
Minor defect	MIL-STD-105D Inspection Level I Normal inspection Single sample inspection	Q/DKE-07-2006(1)

### 6-3 Classification of defects


6-3-1 Major defect

A major defect refers to a defect that may substantially degrade usability for product applications.

6-3-2 Minor defect

A minor defect refers to a defect that deviates from existing standards almost unrelated to the effective use of the product or its operation.

6-4 Inspection standar

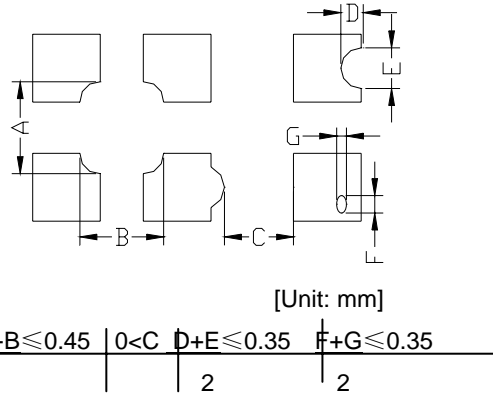Item	Criterion for defects	Defect type																					
1) Display on inspection	(1) Non display (2) Vertical line is deficient (3) Horizontal line is deficient (4) Cross line is deficient	Major																					
2) Black / White spot	<table border="1" data-bbox="595 488 1061 672"> <thead> <tr> <th>Size <math>\Phi</math> (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>\Phi \leq 0.3</math></td> <td>Ignore (note)</td> </tr> <tr> <td><math>0.3 &lt; \Phi \leq 0.45</math></td> <td>3</td> </tr> <tr> <td><math>0.45 &lt; \Phi \leq 0.6</math></td> <td>1</td> </tr> <tr> <td><math>0.3 &lt; \Phi</math></td> <td>0</td> </tr> </tbody> </table> <p>(Note) Not allowed if four more spots crowd together</p>	Size $\Phi$ (mm)	Acceptable number	$\Phi \leq 0.3$	Ignore (note)	$0.3 < \Phi \leq 0.45$	3	$0.45 < \Phi \leq 0.6$	1	$0.3 < \Phi$	0	Minor											
Size $\Phi$ (mm)	Acceptable number																						
$\Phi \leq 0.3$	Ignore (note)																						
$0.3 < \Phi \leq 0.45$	3																						
$0.45 < \Phi \leq 0.6$	1																						
$0.3 < \Phi$	0																						
3) Black / White line	<table border="1" data-bbox="539 734 1211 1039"> <thead> <tr> <th>Length (mm)</th> <th>Width (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>L \leq 10</math></td> <td><math>W \leq 0.03</math></td> <td>Ignore</td> </tr> <tr> <td><math>5.0 \leq L \leq 10</math></td> <td><math>0.03 &lt; W \leq 0.04</math></td> <td>3</td> </tr> <tr> <td><math>5.0 \leq L \leq 10</math></td> <td><math>0.04 &lt; W \leq 0.05</math></td> <td>2</td> </tr> <tr> <td><math>1.0 \leq L \leq 10</math></td> <td><math>0.05 &lt; W \leq 0.06</math></td> <td>2</td> </tr> <tr> <td><math>1.0 \leq L \leq 10</math></td> <td><math>0.06 &lt; W \leq 0.08</math></td> <td>1</td> </tr> <tr> <td><math>L \leq 10</math></td> <td><math>0.08 &lt; W</math></td> <td>follows 2) point defect</td> </tr> </tbody> </table> <p>Defects separate with each other at an interval of more than 20mm.</p>	Length (mm)	Width (mm)	Acceptable number	$L \leq 10$	$W \leq 0.03$	Ignore	$5.0 \leq L \leq 10$	$0.03 < W \leq 0.04$	3	$5.0 \leq L \leq 10$	$0.04 < W \leq 0.05$	2	$1.0 \leq L \leq 10$	$0.05 < W \leq 0.06$	2	$1.0 \leq L \leq 10$	$0.06 < W \leq 0.08$	1	$L \leq 10$	$0.08 < W$	follows 2) point defect	Minor
Length (mm)	Width (mm)	Acceptable number																					
$L \leq 10$	$W \leq 0.03$	Ignore																					
$5.0 \leq L \leq 10$	$0.03 < W \leq 0.04$	3																					
$5.0 \leq L \leq 10$	$0.04 < W \leq 0.05$	2																					
$1.0 \leq L \leq 10$	$0.05 < W \leq 0.06$	2																					
$1.0 \leq L \leq 10$	$0.06 < W \leq 0.08$	1																					
$L \leq 10$	$0.08 < W$	follows 2) point defect																					
4) Display pattern	 <p>[Unit: mm]</p> <table border="1" data-bbox="539 1417 1101 1489"> <tr> <td><math>A+B \leq 0.45</math></td> <td><math>0 &lt; C</math></td> <td><math>D+E \leq 0.35</math></td> <td><math>F+G \leq 0.35</math></td> </tr> <tr> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> </table> <p>Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every 3 of fourths inch.</p>	$A+B \leq 0.45$	$0 < C$	$D+E \leq 0.35$	$F+G \leq 0.35$	2	2	2	2	Minor													
$A+B \leq 0.45$	$0 < C$	$D+E \leq 0.35$	$F+G \leq 0.35$																				
2	2	2	2																				
5) Spot-like contrast irregularity	<table border="1" data-bbox="606 1624 1101 1807"> <thead> <tr> <th>Size <math>\Phi</math> (mm)</th> <th>Acceptable Number</th> </tr> </thead> <tbody> <tr> <td><math>\Phi \leq 0.7</math></td> <td>Ignore (note)</td> </tr> <tr> <td><math>0.7 &lt; \Phi \leq 1.0</math></td> <td>3</td> </tr> <tr> <td><math>1.0 &lt; \Phi \leq 1.5</math></td> <td>1</td> </tr> <tr> <td><math>1.5 &lt; \Phi</math></td> <td>0</td> </tr> </tbody> </table> <p>Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.</p>	Size $\Phi$ (mm)	Acceptable Number	$\Phi \leq 0.7$	Ignore (note)	$0.7 < \Phi \leq 1.0$	3	$1.0 < \Phi \leq 1.5$	1	$1.5 < \Phi$	0	Minor											
Size $\Phi$ (mm)	Acceptable Number																						
$\Phi \leq 0.7$	Ignore (note)																						
$0.7 < \Phi \leq 1.0$	3																						
$1.0 < \Phi \leq 1.5$	1																						
$1.5 < \Phi$	0																						

Item	Criterion for defects		Defect type
6) Bubbles in polarizer	Size $\Phi$ (mm)	Acceptable Number	Minor
	$\Phi \leq 0.4$	Ignore (note)	
	$0.4 < \Phi \leq 0.65$	2	
	$0.65 < \Phi \leq 1.2$	1	
	$1.2 < \Phi$	0	
7) Scratches and dent on the polarizer	Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".		Minor
8) Stains on the surface of LCD panel	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.		Minor
9) Rainbow color	No rainbow color is allowed in the optimum contrast on state within the active area.		Minor
10) Viewing area encroachment	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.		Minor
11) Bezel appearance	Rust and deep damages that are visible in the bezel are rejected.		Minor
12) Defect of land surface contact	Evident crevices that are visible are rejected.		Minor
13) Parts mounting	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.		Major
14) Part alignment	(1) LSI, IC lead width is more than 50% beyond pad outline. (2) More than 50% of LSI, IC leads is off the pad outline.		Minor
15) Conductive foreign matter (solder ball, solder hips)	(1) $0.45 < \Phi, N \geq 1$		Major
	(2) $0.3 < \Phi \leq 0.45, N \geq 1$ $\Phi$ : Average diameter of solder ball (unit: mm)		Minor
	(3) $0.5 < L, N \geq 1$ L: Average length of solder chip (unit: mm)		Minor
16) PCB pattern damage	(1) Deep damage is found on copper foil and the pattern is nearly broken.		Major
	(2) Damage on copper foil other than 1) above		Minor
17) Faulty PCB correction	(1) Due to PCB copper foil pattern burnout, the pattern is connected, using a jumper wire for repair; 2 or more places are corrected per PCB.		Minor
	(2) Short-circuited part is cut, and no resist coating has been performed.		
18) Bezel flaw	Bezel claw missing or not bent		Minor
19) Indication on name plate (sampling indication label)	(1) Failure to stamp or label error, or not legible.(all acceptable if legible)		Minor
	(2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.		

## 7. Reliability

### 7-1 Lifetime

50,000 hours (25°C in the room without ray of sun)

### 7-2 Items of reliability

Item	Condition	Criterion
1) High Temperature Operating	60°C 96hrs	<b>No cosmetic failure is allowable.</b>  <b>Contrast ratio should be between initial value ±10%.</b>  Total current consumption should be below double of initial value.
2) Low Temperature Operation	-20°C 96hrs	
3) Humidity	40°C, 90%RH, 96hrs	<b>No cosmetic failure is allowable.</b>  <b>Contrast ratio should be between initial value ±20%.</b>  Total current consumption should be below double of initial value.
4) High Temperature	70°C 96hrs	
5) Low Temperature	-30°C 96hrs	
6) Thermal shock	25°C → 30°C → 25°C → 70°C 5(min) 30(min) 5(min) 30(min) 5 cycle, 55~60%RH	
7) Vibration	10~55~10hz amplitude: 1.5mm 2hrs for each direction (X,Y,Z)	No defects in cosmetic and operational function are allowable.  Total current consumption should be below double of initial value.

## 8. Handling Precautions

### 8-1 Mounting method

A panel of LCD module consists of two thin glass plates with polarizers that easily get damaged.

And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board (PCB).

Extreme care should be used when handling the LCD modules.

### 8-2 Cautions of LCD handling and cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichlorotrifluoroethane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Ketone
- Aromatics

### 8-3 Caution against static charge

The LCD module use C-MOS LSI drivers. So we recommend you:  
Connect any unused input terminal to  $V_{dd}$  or  $V_{ss}$ . Do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

#### **8-4 Packaging**

- Module employs LCD elements, and must be treated as such.  
Avoid intense shock and falls from a height.  
To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity.

#### **8-5 Caution for operation**

- It is an indispensable condition to drive LCD module within the limits of the specified voltage since the higher voltage over the limits may cause the shorter life of LCD module.  
An electrochemical reaction due to DC (direct current) causes LCD undesirable deterioration so that the uses of DC (direct current) drive should be avoided.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD module may show dark color in them. However those phenomena do not mean malfunction or out of order of LCD module, which will come back in the specified operating temperature.

#### **8-6 Storage**

In the case of storing for a long period of time, the following ways are recommended:

- Storage in polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with not desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping the storage temperature range.
- Storing with no touch on polarizer surface by any thing else.

#### **8-7 Safety**

- It is recommendable to crash damaged or unnecessary LCD into pieces and to wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well at once with soap and water.

## **9. Precautions for Use**

**9-1** Both parties should provide a limit sample on an occasion when both parties agree its necessity.

The judgement by a limit sample shall take effect after the limit sample has been established and confirmed by both parties

**9-2** On the following occasions, the handling of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this manual.
- When a new problem is arisen which is not specified in this manual.
- Some problem is arisen due to the change of inspection and operating conditions inusers.
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.