

# LG - 207

The LG - 207 photointerrupter combine high output GaAs IRED with photo IC.

The sensor makes possible easy development of objectdetecting systems with high performance, high reliability and small equipment size.

### FEATURES


- Compatible to TTL and LSTTL
- Built in Amplifier and Schmitt Trigger
- Wide Vcc range

### APPLICATIONS

- Floppy disk drives
- Copiers
- Facsimiles
- Paper sensors

### DIMENSIONS

(Unit : mm)

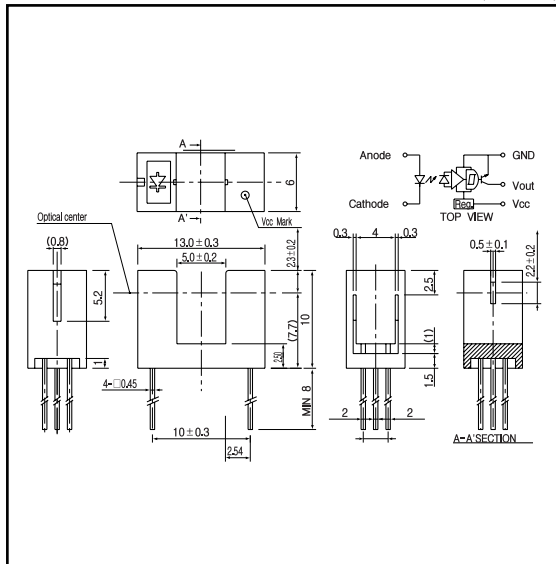

### MAXIMUM RATINGS

(Ta=25 )

Item	Symbol	Rating	Unit	
Input	Power dissipation	P <sub>o</sub>	100	mW
	Reverse voltage	V <sub>R</sub>	5	V
	Forward current	I <sub>F</sub>	60	mA
Output	Supply voltage	V <sub>CC</sub>	16	V
	Low level output current	I <sub>OL</sub>	30	mA
	Power dissipation	P	200	mW
Operating temp.		Topr.	- 20 ~ + 85	
Storage temp.		Tstg.	- 30 ~ + 85	
Soldering temp.*1		Tsol.	240	

\*1. For MAX. 5 seconds at the position of 1mm from the package

### ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 )


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	I <sub>F</sub> =60mA		1.3	1.6	V
	Reverse current	V <sub>R</sub> =5V			10	μA
	Capacitance	V=0V, f=1MHz		25		pF
Output	Operating supply voltage range		4.5		16	V
	Low level output voltage	I <sub>OL</sub> =16mA, V <sub>CC</sub> =5V, I <sub>F</sub> =0			0.4	V
	High level output voltage*2	I <sub>F</sub> =10mA, V <sub>CC</sub> =5V, R <sub>L</sub> =10K	4			V
	Low level supply current	V <sub>CC</sub> =5V, I <sub>F</sub> =0		2	7	mA
	High level supply current	V <sub>CC</sub> =5V, I <sub>F</sub> =10mA		2	7	mA
Trans - mission	L <sub>F</sub> H threshold input current	V <sub>CC</sub> =5V		6		mA
	Hysteresis	V <sub>CC</sub> =5V		0.75		-
	L <sub>F</sub> H propagation time*3	V <sub>CC</sub> =5V, I <sub>F</sub> =10mA		2		μsec.
	H <sub>F</sub> L propagation time*3	R <sub>L</sub> =280		1		

\*2,\*3. refer to measurement diagram as right side.


# Photointerrupters(Transmissive)

## LG - 207


**Power dissipation Vs. Ambient temperature**

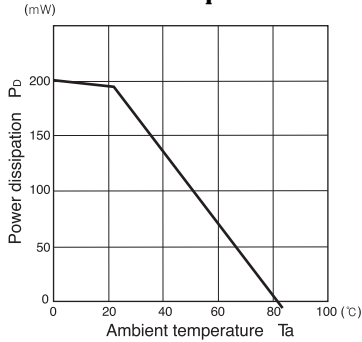


**Forward current Vs. Forward voltage**




**Low level output voltage Vs. Low level output current**

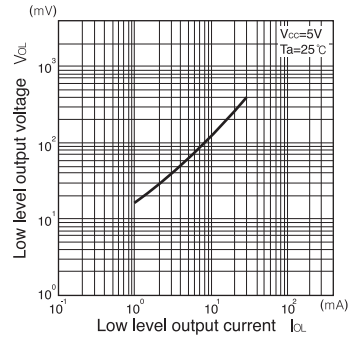


**Relative threshold input current Vs. Supply voltage**

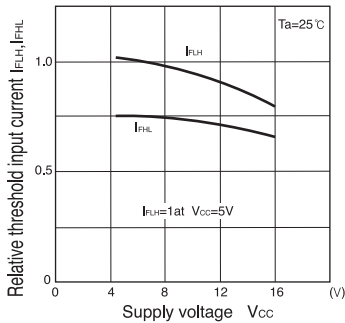

**Relative threshold input current Vs. Ambient temperature**

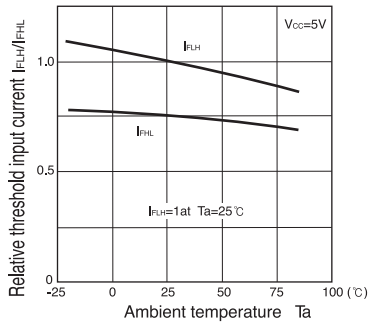

Measurement of high level output voltage

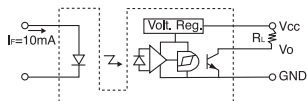

Measurement of propagation time

