
2SC5246

Silicon NPN Epitaxial

HITACHI

ADE-208-264

1st. Edition


Application

VHF / UHF wide band amplifier

Features

- High gain bandwidth product
 $f_T = 12 \text{ GHz typ}$
- High gain, low noise figure
 $PG = 16.5 \text{ dB typ}$, $NF = 1.6 \text{ dB typ}$ at $f = 900 \text{ MHz}$

Outline

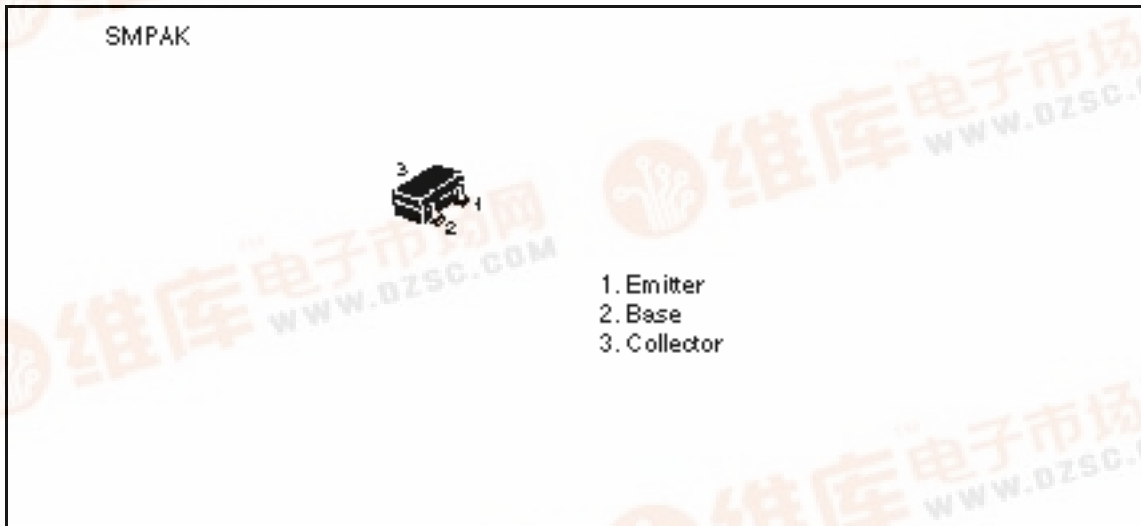

2SC5246

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	15	V
Collector to emitter voltage	V_{CEO}	8	V
Emitter to base voltage	V_{EBO}	1.5	V
Collector current	I_C	20	mA
Collector power dissipation	P_C	80	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	–55 to +150	°C


Note: Marking is “ZC–”.

Attention: This device is very sensitive to electro static discharge.


It is recommended to adopt appropriate cautions when handling this transistor.

Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector cutoff current	I_{CBO}	—	—	10	μA	$V_{CB} = 15\text{ V}$, $I_E = 0$
	I_{CEO}	—	—	1	mA	$V_{CE} = 8\text{ V}$, $R_{BE} =$
Emitter cutoff current	I_{EBO}	—	—	10	μA	$V_{EB} = 1.5\text{ V}$, $I_C = 0$
DC current transfer ratio	h_{FE}	50	100	160		$V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$
Collector output capacitance	C_{ob}	—	0.3	0.8	pF	$V_{CB} = 5\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$
Gain bandwidth product	f_T	9	12	—	GHz	$V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$
Power gain	PG	14	16.5	—	dB	$V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$, $f = 900\text{ MHz}$
Noise figure	NF	—	1.6	2.5	dB	$V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$, $f = 900\text{ MHz}$

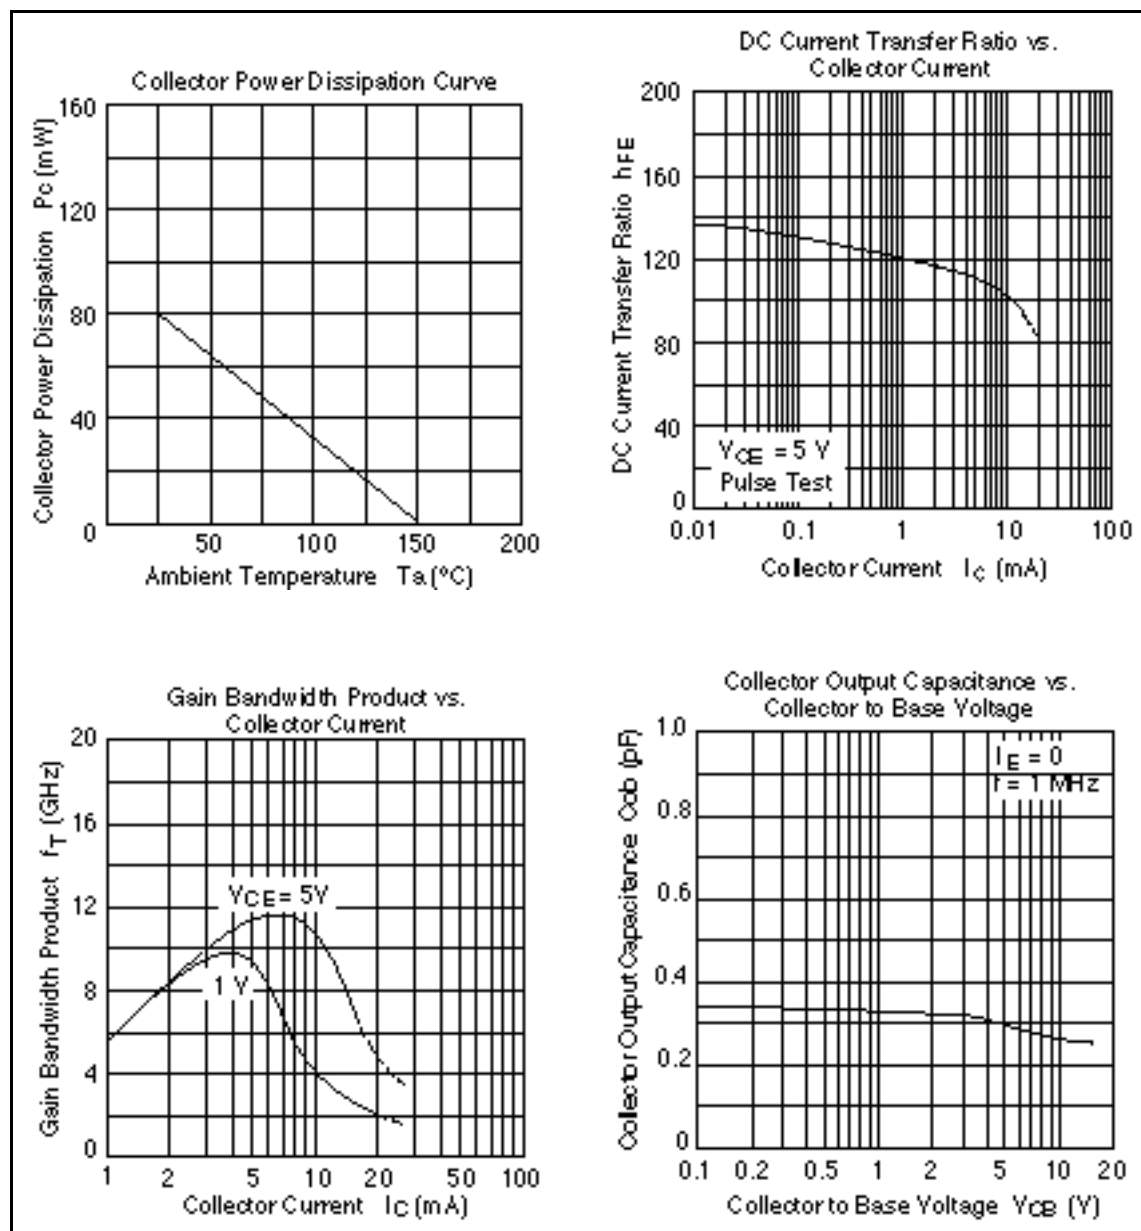

2SC5246

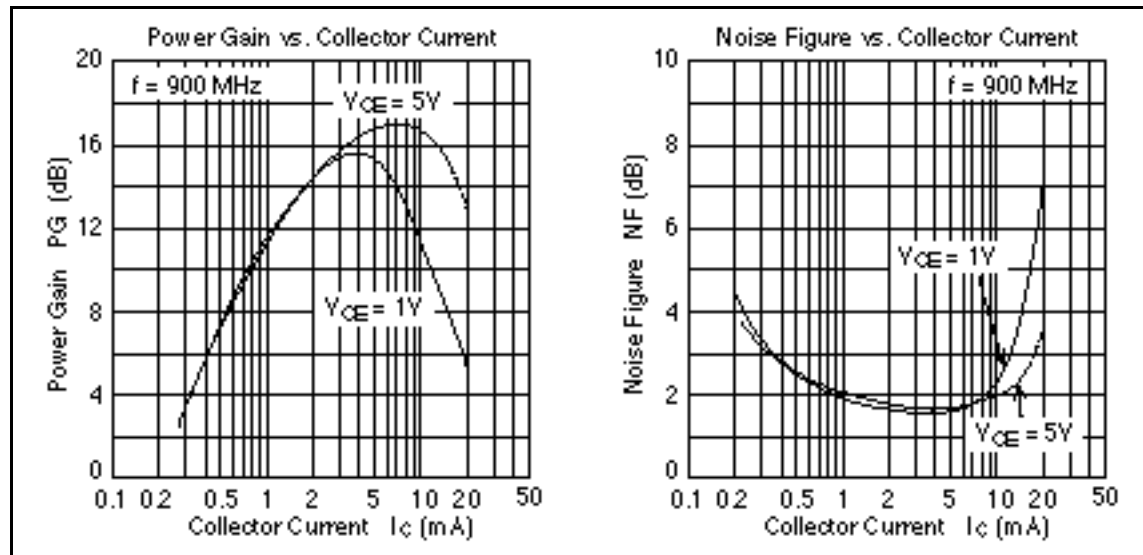


S11 Parameter vs. Frequency

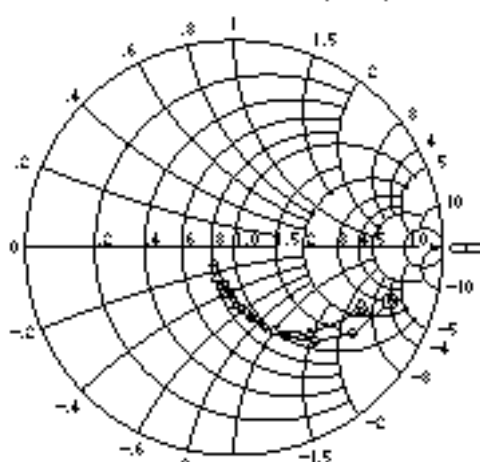


Condition: $V_{CE} = 5 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 (○) $I_c = 5 \text{ mA}$
 (△) $I_c = 10 \text{ mA}$

S21 Parameter vs. Frequency

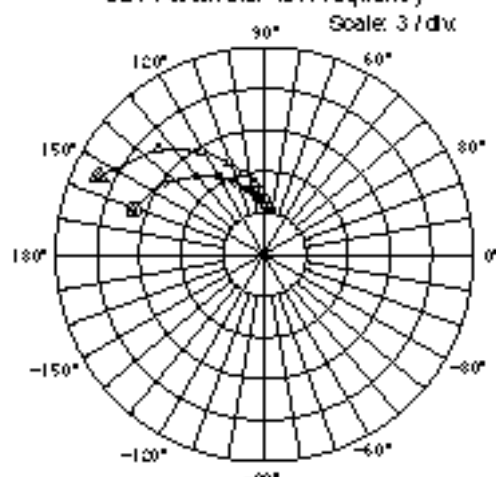


Condition: $V_{CE} = 5 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 (○) $I_c = 5 \text{ mA}$
 (△) $I_c = 10 \text{ mA}$

S12 Parameter vs. Frequency

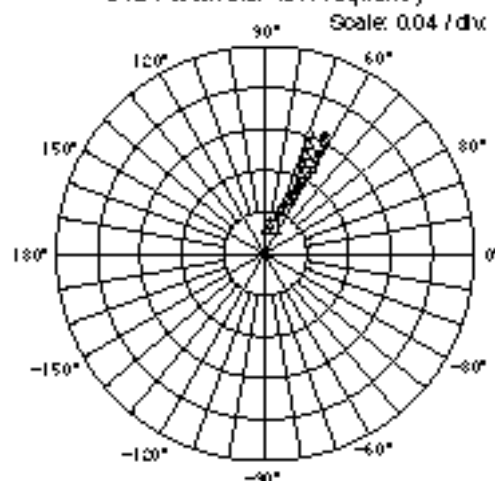


Condition: $V_{CE} = 5 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 (○) $I_c = 5 \text{ mA}$
 (△) $I_c = 10 \text{ mA}$

S22 Parameter vs. Frequency

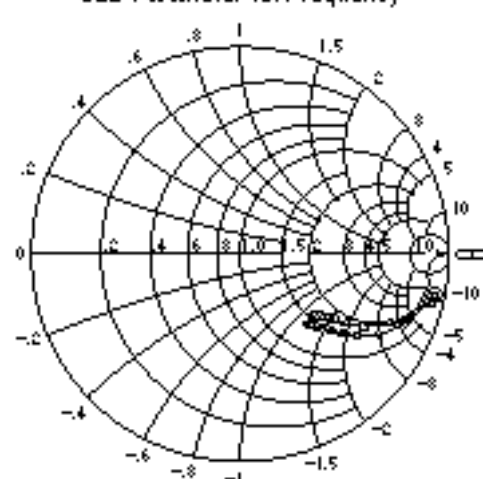


Condition: $V_{CE} = 5 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 (○) $I_c = 5 \text{ mA}$
 (△) $I_c = 10 \text{ mA}$

S11 Parameter vs. Frequency

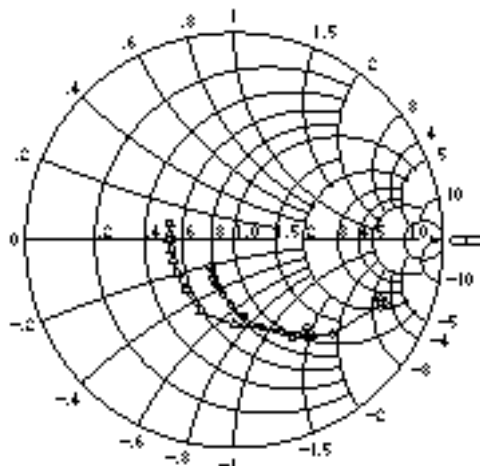


Condition: $V_{CE} = 1\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (Ic = 5 mA)
 △ — (Ic = 10 mA)

S21 Parameter vs. Frequency

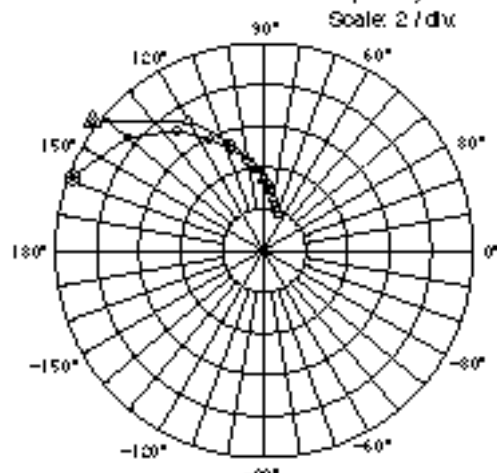


Condition: $V_{CE} = 1\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (Ic = 5 mA)
 △ — (Ic = 10 mA)

S12 Parameter vs. Frequency

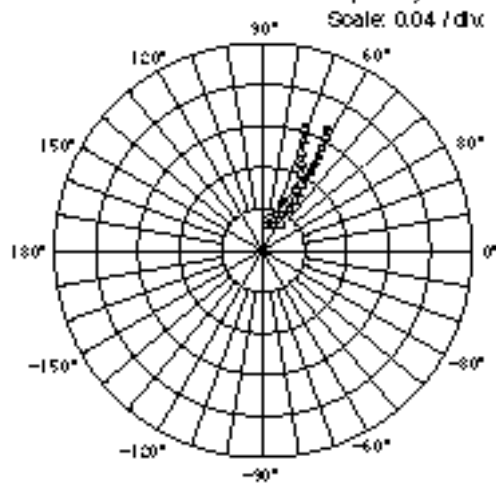

Condition: $V_{CE} = 1\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (Ic = 5 mA)
 △ — (Ic = 10 mA)

S22 Parameter vs. Frequency

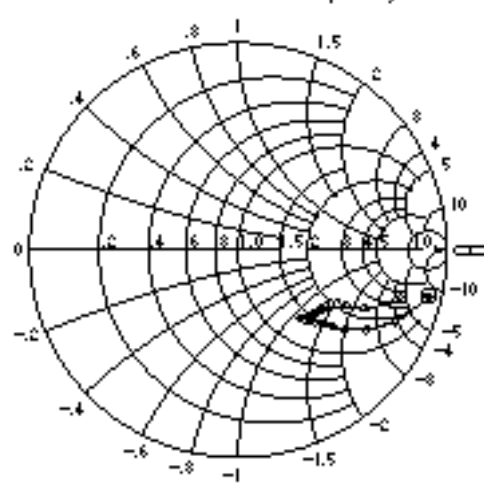

Condition: $V_{CE} = 1\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (Ic = 5 mA)
 △ — (Ic = 10 mA)

S Parameter ($V_{CE} = 5 \text{ V}$, $I_C = 5 \text{ mA}$, $Z_0 = 50 \text{ } \Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.793	-18.9	9.98	161	0.026	78.6	0.955	-12.0
400	0.702	-36.0	8.88	144	0.047	70.2	0.864	-22.7
600	0.594	-49.4	7.63	131	0.063	64.6	0.768	-30.3
800	0.495	-59.9	6.54	120	0.074	62.4	0.684	-34.8
1000	0.415	-69.1	5.65	112	0.085	61.1	0.620	-38.0
1200	0.349	-76.8	4.94	105	0.093	60.5	0.572	-40.1
1400	0.293	-83.0	4.37	99.4	0.102	61.3	0.535	-42.0
1600	0.241	-90.2	3.93	94.7	0.110	61.7	0.508	-43.7
1800	0.214	-93.9	3.57	90.2	0.119	61.9	0.486	-45.0
2000	0.181	-103	3.28	89.3	0.127	63.4	0.469	-46.4

S Parameter ($V_{CE} = 5 \text{ V}$, $I_C = 10 \text{ mA}$, $Z_0 = 50 \text{ } \Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.679	-26.4	13.2	155	0.024	76.2	0.924	-14.6
400	0.552	-48.9	10.8	135	0.041	69.0	0.794	-25.1
600	0.445	-64.5	8.71	121	0.054	64.8	0.687	-30.6
800	0.342	-76.7	7.12	111	0.064	64.5	0.611	-33.3
1000	0.283	-88.1	5.99	104	0.073	64.5	0.559	-34.9
1200	0.228	-98.3	5.15	97.8	0.083	65.7	0.526	-36.0
1400	0.191	-105	4.50	93.0	0.092	66.8	0.501	-37.3
1600	0.166	-119	4.01	88.6	0.102	67.9	0.483	-38.5
1800	0.136	-124	3.62	84.6	0.112	68.3	0.470	-40.1
2000	0.123	-140	3.31	81.1	0.122	69.5	0.460	-41.3

2SC5246

S Parameter ($V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$, $Z_0 = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.764	-23.4	9.82	159	0.028	77.1	0.938	-13.7
400	0.651	-43.6	8.47	140	0.051	67.8	0.830	-24.8
600	0.545	-59.5	7.13	126	0.067	62.1	0.727	-31.9
800	0.439	-72.2	5.98	116	0.079	59.7	0.641	-36.7
1000	0.366	-83.3	5.10	108	0.088	58.7	0.581	-39.2
1200	0.308	-92.9	4.46	101	0.097	59.0	0.537	-41.3
1400	0.263	-102	3.92	95.3	0.105	59.7	0.505	-43.1
1600	0.228	-113	3.51	90.4	0.114	60.4	0.481	-44.8
1800	0.205	-120	3.19	86.0	0.123	61.1	0.461	-46.5
2000	0.175	-131	2.92	82.3	0.132	62.5	0.447	-47.8

S Parameter ($V_{CE} = 1\text{ V}$, $I_C = 10\text{ mA}$, $Z_0 = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.570	-52.3	10.3	143	0.030	66.1	0.811	-17.9
400	0.443	-89.8	7.23	120	0.046	56.8	0.665	-25.2
600	0.376	-115	5.37	107	0.056	56.7	0.586	-27.6
800	0.333	-134	4.20	97.7	0.064	58.4	0.534	-29.0
1000	0.317	-149	3.43	91.0	0.073	60.8	0.519	-30.6
1200	0.309	-161	2.93	85.0	0.082	63.8	0.505	-32.5
1400	0.305	-171	2.53	80.1	0.091	65.8	0.495	-34.8
1600	0.312	-180	2.25	76.1	0.101	68.1	0.487	-37.6
1800	0.309	-175	2.03	72.0	0.112	69.9	0.481	-40.3
2000	0.320	-166	1.84	68.6	0.123	71.4	0.476	-43.1

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

HITACHI

Hitachi, Ltd.

Semiconductor & IC Div.

Nippon Bldg., 2-6-2, Ohite-machi, Chiyoda-ku, Tokyo 100, Japan

Tel Tokyo (03) 3270-2111

Fax (03) 3270-5109

For further information write to:

Hitachi America, Ltd.

Semiconductor & IC Div.

2000 Sierra Point Parkway

Berkeley, CA. 94705-4835

U.S.A.

Tel 415-589-8300

Fax 415-589-4207

Hitachi Europe GmbH

Electronic Components Group

Continental Europe

Danrecher Straße 3

D-85622 Feldkirchen

München

Tel 089-9 91 80-0

Fax 089-9 29 30 00

Hitachi Europe Ltd.

Electronic Components Div.

Northern Europe Headquarters

Whitbrook Park

Lower Cookham Road

M Maidenhead

Berkshire SL6 8YA

United Kingdom

Tel 0628-585000

Fax 0628-778322

Hitachi Asia Pte. Ltd.

45 Collyer Quay #20-00

Hitachi Tower

Singapore 0104

Tel 535-2100

Fax 535-1533

Hitachi Asia (Hong Kong) Ltd.

Unit 705, North Tower,

World Finance Centre

Harbour City, Canton Road

Tsim Sha Tsui, Kowloon

Hong Kong

Tel 27359218

Fax 27308074