





# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

## For Use with Transceivers Requiring 1:1 Transmit and Receive Turns Ratios

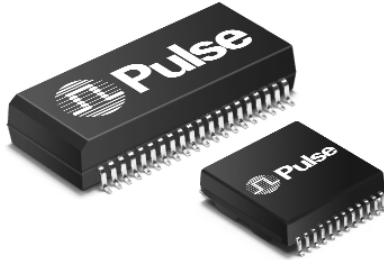

-  Compliant with IEEE 802.3u and ANSI X3.263 standards including 350  $\mu$ H OCL with 8 mA bias
-  Modules designed to support two RJ-45 connectors
-  Some models offer AutoMDIX capability

### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C


Part Number <sup>1</sup>	Insertion Loss (dB TYP)	Return Loss (dB MIN)					Crosstalk (dB TYP)				Differential to Common Mode Rejection (dB TYP)	
		0.1-100 MHz	2-30 MHz	40 MHz	50 MHz	60-80 MHz	1 MHz	30 MHz	60 MHz	100 MHz	1-60 MHz	60-200 MHz
H1026	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-40	-30
H1027	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-53	-40
H1028	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-45	-35
H1049	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-45	-35
H1114	-1.2		-16	-14	-13	-12	-50	-45	-40	-35	-37	-33
H1200 <sup>2</sup>	-1.0		-16	-14.4	-13	-12	-50	-45	-40	-35	-37	-33
H1170	-1.2		-18	-16	-14	-12	-60	-45	-40	-35	-45	-35
H1174	-1.2		-18	-16	-14	-12	-60	-45	-40	-35	-45	-35
H1270 <sup>2</sup>	-1.2		-18	-16	-14	-12	-60	-45	-40	-35	-45	-35

1. All models meet input/output breakdown (Hipot) of 1500 Vrms.
2. Suitable for AutoMDIX applications.


U.S. Patent No. 5,015,981

## Mechanicals

### H1XXX

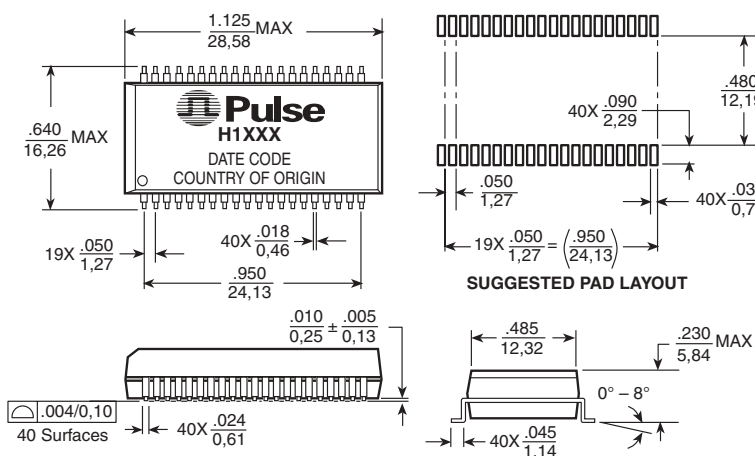

### H1174/H1270

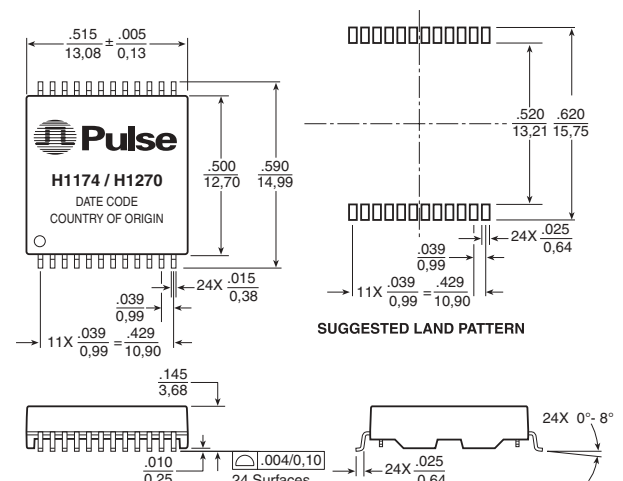

Dimensions: Inches  
mm

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{.025}$




# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

## For Use with Transceivers Requiring 1:1 Transmit and Receive Turns Ratios




### Schematics

#### H1026, H1114

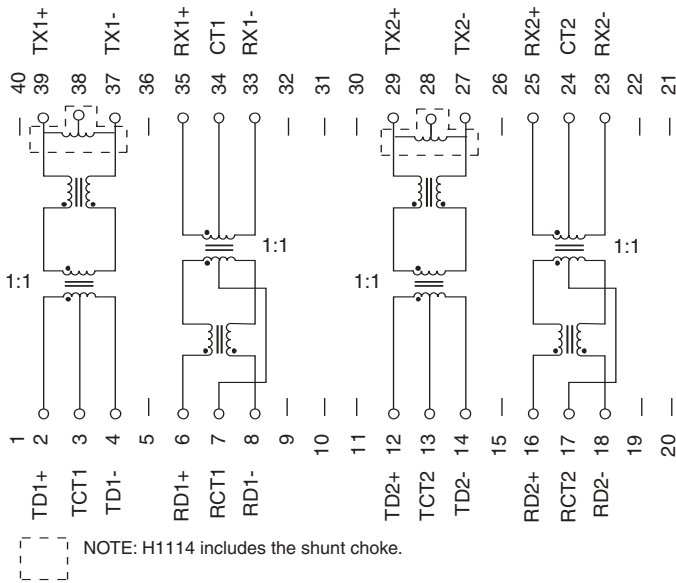


#### H1027, H1028

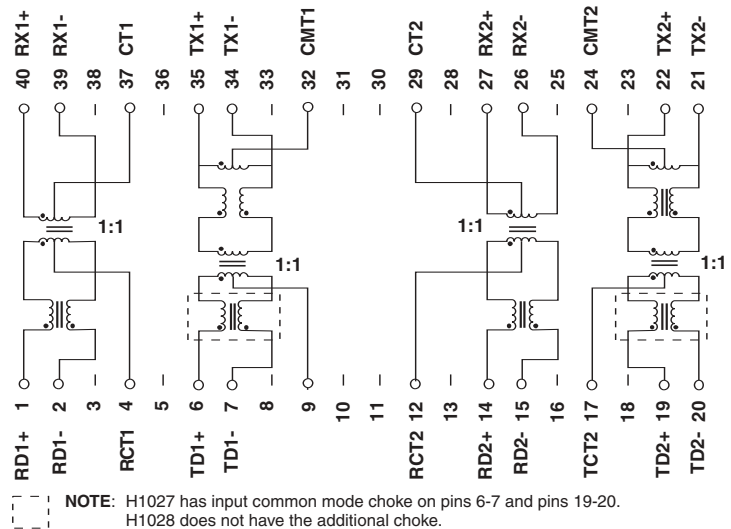

**Dual Port Solutions:** The H1027, H1028, H1049, and H1026 are designed to support two RJ-45 connectors. The H1027 and the H1028 have the same pinout. The H1027 has an additional common mode choke on both transmit channels. The H1049 and the H1026 offer different pinouts for design flexibility.

#### H1049

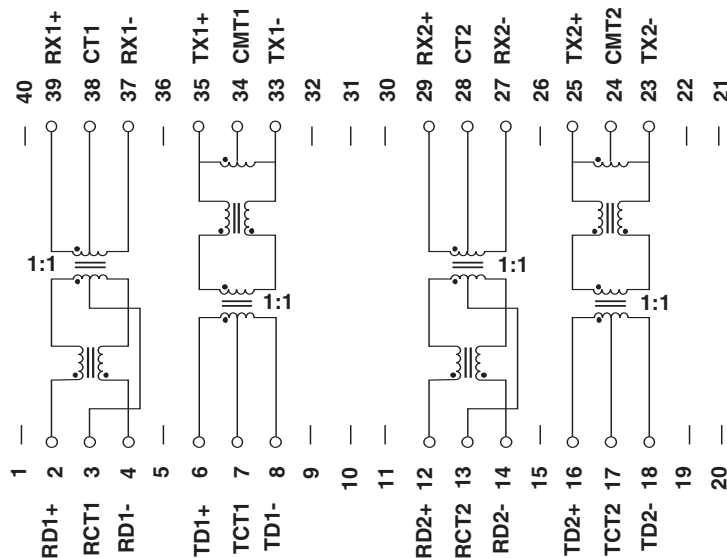




# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

## For Use with Transceivers Requiring 1:1 Transmit and Receive Turns Ratios




### Schematics


#### H1200

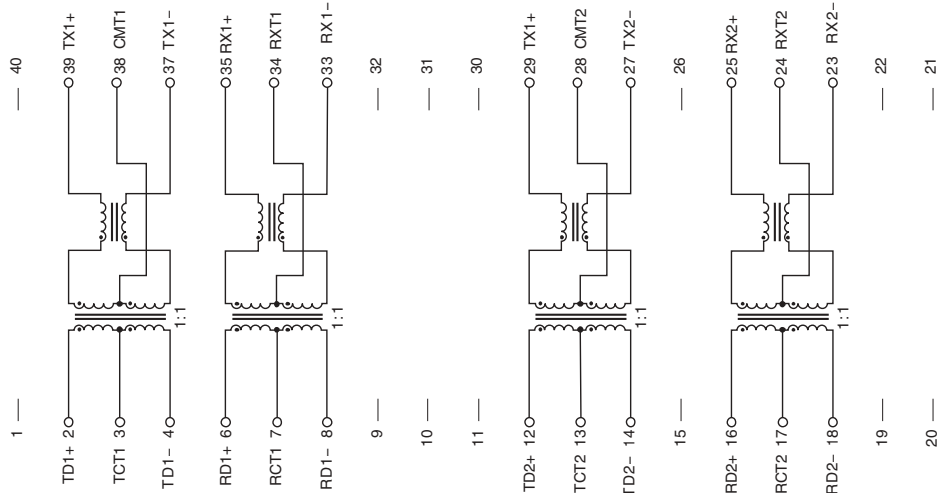

#### H1174

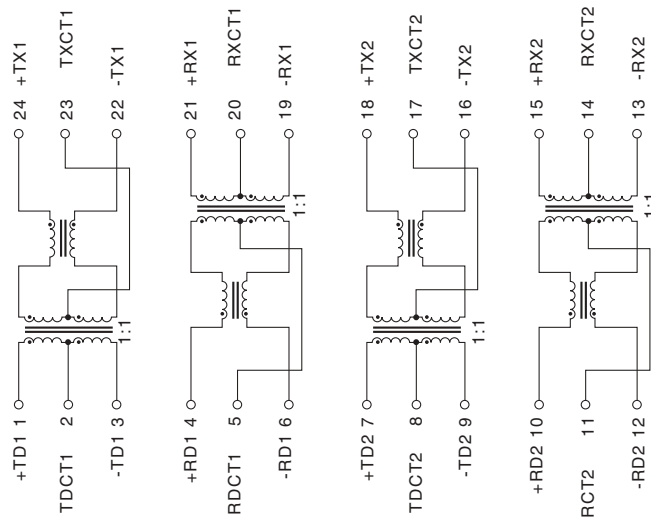

#### H1270

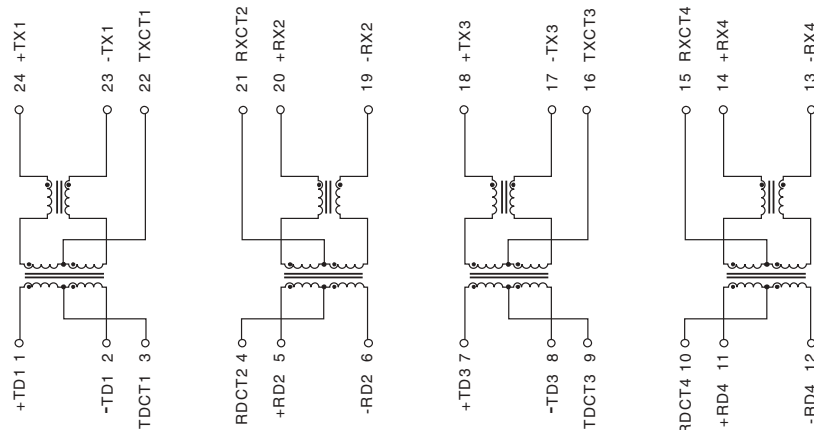




# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

For Use with Transceivers Requiring  
1:1 Transmit and Receive Turns Ratios




## Tape & Reel Specifications

### H1XXX

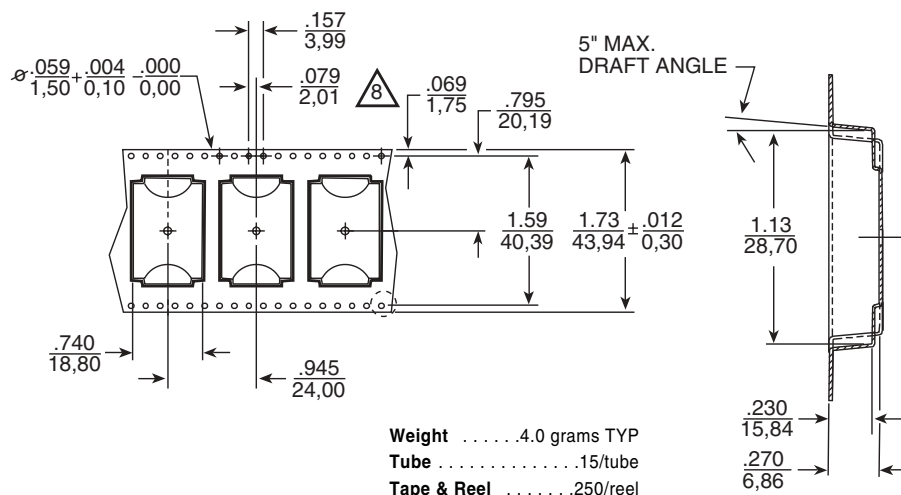

### H1174/H1270

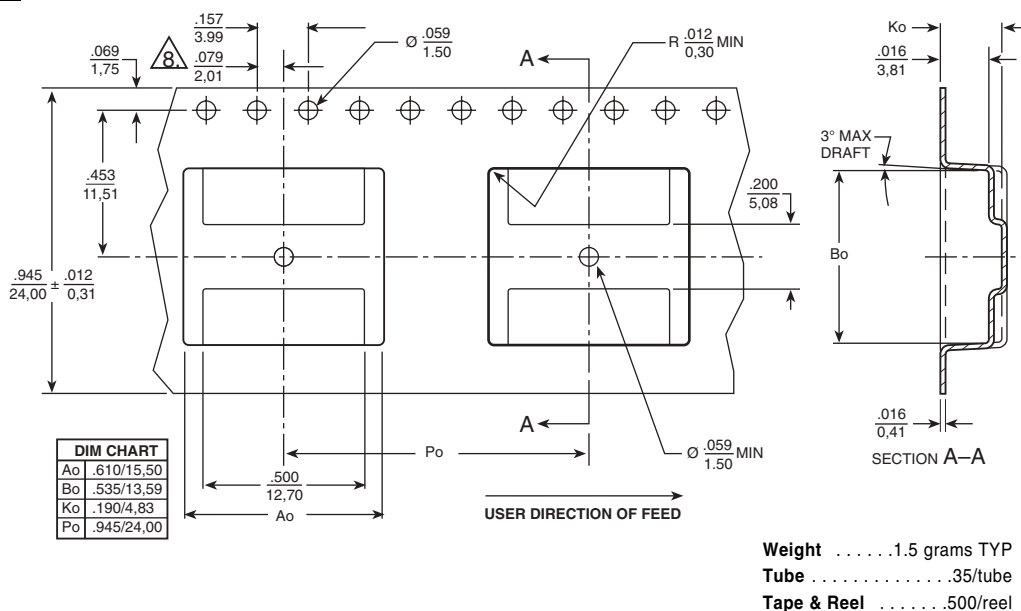

## For More Information :

### UNITED STATES (Worldwide)

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.  
<http://www.pulseeng.com>  
TEL: 619 674 8100  
FAX: 619 674 8262

### UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road  
The Surrey Research Park  
Guildford, Surrey GU2 5RE  
United Kingdom  
TEL: 44 1483 401700  
FAX: 44 1483 401701

### FRANCE (Southern Europe)

Zone Industrielle  
F-39270  
Orgelet  
France  
TEL: 33 3 84 35 04 04  
FAX: 33 3 84 25 46 41

### SINGAPORE (Southern Asia)

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324  
TEL: 65 287 8998  
FAX: 65 280 0080

### TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1  
HsinTai Wu Road  
Hsi-Chih, Taipei Hsien  
Taiwan, R.O.C.  
Tel: 886 2 2698 0228  
FAX: 886 2 2698 0948

### HONG KONG (Great China)

19/F, China United Plaza  
1008 Tai Nan West Street  
Cheung Sha Wan, Kowloon  
Hong Kong, China  
TEL: 852 2788 6588  
FAX: 852 2776 1055

### DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

Printed on recycled paper. © Copyright, 2002. All rights reserved. Pulse Engineering, Inc.