

## CD4016M/CD4016C Quad Bilateral Switch

### General Description

The CD4016M/CD4016C is a quad bilateral switch which utilizes P-channel and N-channel complementary MOS (CMOS) circuits to provide an extremely high "OFF" resistance and low "ON" resistance switch. The switch will pass signals in either direction and is extremely useful in digital switching.

■ Extremely low leakage

■ Transmits frequencies up to 10 MHz

$$V_{is} = 5 \text{ V}_{p-p}$$

$$V_{DD} - V_{SS} = 10\text{V}$$

$$R_L = 10 \text{ k}\Omega$$

### Features

- Wide supply voltage range
- High noise immunity
- Wide range of digital and analog levels
- Low "ON" resistance

3V to 15V

0.45  $V_{CC}$  typ.

$\pm 7.5 \text{ V}_{PEAK}$

300  $\Omega$  typ.

$V_{DD} - V_{SS} = 15\text{V}$

- Matched switch characteristics

$\Delta R_{ON} = 40 \Omega$  typ.

65 dB typ.

@  $f_{is} = 10 \text{ kHz}$

$R_L = 10\text{k}$

- High degree of linearity


.5% distortion typ.

@  $f_{is} = 1 \text{ kHz}$

### Applications

- Analog signal switching/multiplexing
  - Signal gating
  - Squelch control
  - Chopper
  - Modulator
  - Demodulator
  - Commutating switch
- Digital signal switching/multiplexing
- CMOS logic implementation
- Analog to digital/digital to analog conversion
- Digital control of frequency, impedance, phase, and analog-signal gain

### Schematic and Connection Diagrams

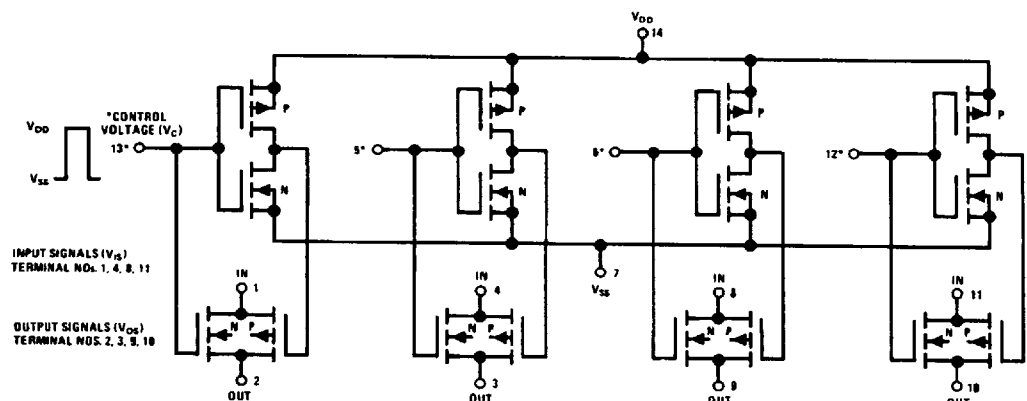


**Note 1:** All switch P-channel substrates are internally connected to terminal No. 14.

**Note 2:** All switch N-channel substrates are internally connected to terminal No. 7.

Signal-level range:  $V_{SS} < V_{is} < V_{DD}$

TL/H/6104-1  
Normal operation: Control-line biasing, switch ON  $V_C = V_{DD}$ , switch OFF  $V_C = V_{SS}$

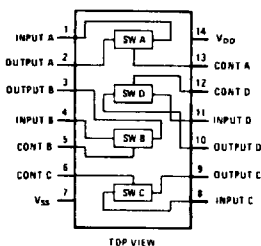

TL/H/6104-2

Order Number CD4016MJ or CD4016CJ  
See NS Package J14A

Order Number CD4016CN  
See NS Package N14A

Order Number CD4016MW  
See NS Package W14B

## Absolute Maximum Ratings

Voltage at Any Pin (Note 1)  $V_{SS} - 0.3V$  to  $V_{SS} + 15.5V$   
 Operating Temperature Range CD4016M  $-55^{\circ}C$  to  $+125^{\circ}C$   
 CD4016C  $-40^{\circ}C$  to  $+85^{\circ}C$

Storage Temperature Range  $-65^{\circ}C$  to  $+150^{\circ}C$   
 Package Dissipation 500 mW  
 Lead Temp. (Soldering, 10 seconds)  $300^{\circ}C$   
 Operating  $V_{DD}$  Range  $V_{SS} + 3V$  to  $V_{SS} + 15V$

## Electrical Characteristics CD4016M

Symbol	Characteristic	Test Conditions	Limits									Units		
			-55°C			25°C			125°C					
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max			
	Quiescent Dissipation per Package	Terminals	Volts Applied											
P <sub>T</sub>	All Switches "OFF"	V <sub>DD</sub> 14	+ 10											
		V <sub>SS</sub> 7	GND											
		V <sub>C</sub> 5, 6, 12, 13	GND			5		0.1	5			300 μW		
		V <sub>is</sub> 1, 4, 8, 11	≤ +10											
		V <sub>os</sub> 2, 3, 9, 10	≤ +10											
	All Switches "ON"	Terminals	Volts Applied											
		V <sub>DD</sub> 14	+ 10											
		V <sub>SS</sub> 7	GND											
		V <sub>C</sub> 5, 6, 12, 13	+ 10			5		0.1	5			300 μW		
		V <sub>is</sub> = V <sub>os</sub> 1-4, 8-11	≤ +10											
V <sub>THN</sub>	Threshold Voltage N-Channel	I <sub>DS</sub> = 10 μA V <sub>DD</sub> = 5V, 10V, or 15V		1.7			1.5			1.3		V		
V <sub>THP</sub>	P-Channel	I <sub>DS</sub> = 10 μA V <sub>DD</sub> = 5V, 10V, or 15V		-1.7			-1.5			-1.3		V		
SIGNAL INPUTS (V <sub>is</sub> ) AND OUTPUTS (V <sub>os</sub> )														
R <sub>ON</sub>	"ON" Resistance	V <sub>C</sub> = V <sub>DD</sub> V <sub>SS</sub> R <sub>L</sub> = 10 kΩ	V <sub>is</sub> +7.5V		120	360		200	400		300	600	Ω	
			-7.5V		120	360		200	400		300	600		
			±0.25V		130	775		280	850		470	1230		
				+5V -5V		130	600		250	660		400	960	Ω
				±0.25V		130	600		250	660		400	960	
			+15V 0V		325	1870		580	2000		900	2600		
				+0.25V		120	360		200	400		300	600	Ω
				9.3V		120	360		200	400		300	600	
			+10V 0V		150	775		300	850		490	1230		
				+0.25V		130	600		250	660		400	960	Ω
				5.6V		130	600		250	660		400	960	
						300	1870		560	2000		880	2600	
ΔR <sub>ON</sub>	Δ "ON" Resistance Between Any 2 of 4 Switches	+7.5V -7.5V ±7.5V +5V -5V ±5V					10 15					Ω		
	Sine Wave Response (Distortion) V <sub>C</sub> = V <sub>SS</sub>	R <sub>L</sub> = 10 kΩ f <sub>is</sub> = 1 kHz V <sub>DD</sub> +5V -V V <sub>is</sub> 5V(p-p) (Note 3)					0.4				%			
	Input or Output Leakage-Switch "OFF" (Effective "OFF" Resistance)	+7.5V -7.5V +7.5V +5V -5V +5V -5V					±100 ±100 (Note 2) (Note 2)	125 125				pA nA		
	Frequency Response-Switch "ON" (Sine Wave Input)	V <sub>C</sub> = V <sub>DD</sub> = +5V, V <sub>SS</sub> = -5V R <sub>L</sub> = 1 kΩ 20 Log <sub>10</sub> $\frac{V_{os}}{V_{is}}$ = -3 dB V <sub>is</sub> = 5V(p-p) V <sub>DD</sub> = +5V, V <sub>C</sub> = V <sub>SS</sub> = -5V					40					MHz		
	Feedthrough Switch "OFF"	20 Log <sub>10</sub> $\frac{V_{os}}{V_{is}}$ = -50 dB					1.25					MHz		
	Crosstalk Between any 2 of the 4 switches (Frequency at -50 dB)	R <sub>L</sub> = 1kΩ V <sub>is</sub> (A) = 5V(p-p) V <sub>C</sub> (A) = V <sub>DD</sub> = +5V V <sub>C</sub> (B) = V <sub>SS</sub> = 5V 20 Log <sub>10</sub> $\frac{V_{os}(B)}{V_{is}(A)}$ = -50 dB					0.9					MHz		

**Note 1:** The device should not be connected to circuits with the power on. **Note 2:**  $\pm 10 \times 10^{-3}$ . **Note 3:** Symmetrical about 0V.

# Electrical Characteristics CD4016M (Continued)

Symbol	Characteristic	Test Conditions	Limits									Units	
			- 55°C			25°C			125°C				
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
SIGNAL INPUTS (V <sub>is</sub> ) AND OUTPUTS (V <sub>os</sub> ) (Continued)													
C <sub>is</sub> C <sub>os</sub> C <sub>ios</sub>	Capacitance Input Output Feedthrough	V <sub>DD</sub> = - 5V, V <sub>C</sub> = V <sub>SS</sub> = - 5V					4 4 0.2					pF	
t <sub>pd</sub>	Propagation Delay Signal Input to Signal Output	V <sub>C</sub> = V <sub>DD</sub> = - 10V, V <sub>SS</sub> = GND, C <sub>L</sub> = 15 pF V <sub>is</sub> = 10V (square wave) t <sub>r</sub> = t <sub>f</sub> = 20 ns (input Signal)					10					ns	
CONTROL (V <sub>C</sub> )													
V <sub>THC</sub>	Switch Threshold Voltage	V <sub>is</sub> ≤ V <sub>DD</sub> V <sub>DD</sub> - V <sub>SS</sub> = 15V, 10V, 5V I <sub>IS</sub> = 10 μA	0.7		2.9	0.5	1.5	2.7	0.2		2.4	V	
I <sub>C</sub>	Input Current	V <sub>DD</sub> - V <sub>SS</sub> = 10V V <sub>C</sub> ≤ V <sub>DD</sub> - V <sub>SS</sub>					± 10					pA	
C <sub>C</sub>	Average Input Capacitance						5					pF	
	Crosstalk – Control Input to Signal Output	V <sub>DD</sub> - V <sub>SS</sub> = 10V V <sub>C</sub> = 10V      R <sub>L</sub> = 10 kΩ (square wave)					50					mV	
t <sub>pdC</sub>	Turn “ON” Propagation Delay	t <sub>rc</sub> = t <sub>fc</sub> = 20 ns      V <sub>is</sub> < 10V, C <sub>L</sub> = 15 pF					20					ns	
	Maximum Allowable Control Input Repetition Rate	V <sub>DD</sub> = 10V, V <sub>SS</sub> = GND, R <sub>L</sub> = 1 Ω C <sub>L</sub> = 15 pF V <sub>C</sub> = 10V (square wave) t <sub>r</sub> = t <sub>f</sub> = 20 ns					10					MHz	

# Electrical Characteristics CD4016C

Symbol	Characteristic	Test Conditions	Limits									Units	
			-40°C			25°C			85°C				
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
	Quiescent Dissipation per Package	Terminals	Volts Applied										
P <sub>T</sub>	All Switches "OFF"	V <sub>DD</sub> 14	+10										
		V <sub>SS</sub> 7	GND										
		V <sub>C</sub> 5, 6, 12, 13	GND			5		0.1	5			80	μW
		V <sub>is</sub> 1, 4, 8, 11	≤ +10										
		V <sub>os</sub> 2, 3, 9, 10	≤ +10										
		Terminals	Volts Applied										
	All Switches "ON"	V <sub>DD</sub> 14	+10										
		V <sub>SS</sub> 7	GND										
		V <sub>C</sub> 5, 6, 12, 13	+10			5		0.1	5			80	μW
		V <sub>is</sub> = V <sub>os</sub> 1-4, 8-11	≤ +10										
V <sub>THN</sub>	Threshold Voltage N-Channel	I <sub>PS</sub> = 10 μA											
		V <sub>DD</sub> = 5V, 10V, or 15V		1.7				1.5			1.3		V
V <sub>THP</sub>	P-Channel	I <sub>PS</sub> = 10 μA											
		V <sub>DD</sub> = 5V, 10V, or 15V		-1.7				-1.5			-1.3		V

**Note 1:** The device should not be connected to circuits with the power on.

**Note 2:**  $\pm 10 \times 10^{-3}$ .

**Note 3:** Symmetrical about 0V.

# **Electrical Characteristics** CD4016C (Continued)

Sym.	Characteristic	Test Conditions	Limits									Units		
			-40°C			25°C			85°C					
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max			
SIGNAL INPUTS (V <sub>is</sub> ) AND OUTPUTS (V <sub>os</sub> )														
R <sub>ON</sub>	"ON" Resistance	V <sub>C</sub> = V <sub>DD</sub> V <sub>SS</sub> V <sub>is</sub> + 7.5V + 7.5V - 7.5V - 7.5V ± 0.25V + 5V + 5V - 5V - 5V ± 0.25V + 15V + 15V 0V + 0.25V 9.3V + 10V + 10V 0V + 0.25V 5.6V	R <sub>L</sub> = 10 kΩ	130	370		200	400	260	520	Ω			
				130	370		200	400	260	520				
				160	790		280	850	400	1080				
							150	610		250	660	340	840	Ω
							150	610		250	660	340	840	
							370	1900		580	2000	770	2380	
			130	370		200	400	260	520	Ω				
			180	790		300	850	400	1080					
			150	610		250	660	340	840					
			150	610		250	660	340	2380	Ω				
			350	1900		560	2000	750	2380					
ΔR <sub>ON</sub>	Δ "ON" Resistance Between Any 2 of 4 Switches	+ 7.5V - 7.5V ± 7.5V + 5V - 5V ± 5V				10 15				Ω				
	Sine Wave Response (Distortion) V <sub>C</sub> = V <sub>SS</sub>	R <sub>L</sub> = 10 kΩ f <sub>is</sub> = 1 kHz V <sub>DD</sub> + 5V - 5V 5V(p-p) V <sub>is</sub> (Note 3)				0.4				%				
	Input or Output Leakage-Switch "OFF" (Effective "OFF" Resistance)	+ 7.5V - 7.5V + 7.5V + 5V - 5V + 5V - 5V				± 100 ± 100 (Note 2) (Note 2)	125 125			pA nA				
	Frequency Response-Switch "ON" (Sine Wave Input)	V <sub>C</sub> = V <sub>DD</sub> = + 5V, V <sub>SS</sub> = - 5V R <sub>L</sub> = 1 kΩ 20 Log <sub>10</sub> $\frac{V_{os}}{V_{is}}$ = - 3 dB V <sub>is</sub> = 5V(p-p) V <sub>DD</sub> = + 5V, V <sub>C</sub> = V <sub>SS</sub> = - 5V				40				MHz				
	Feedthrough Switch "OFF"	20 Log <sub>10</sub> $\frac{V_{os}}{V_{is}}$ = - 50 dB				1.25				MHz				
	Crosstalk Between any 2 of the 4 switches (Frequency at - 50 dB)	R <sub>L</sub> = 1kΩ V <sub>C</sub> (A) = V <sub>DD</sub> = + 5V V <sub>C</sub> (B) = V <sub>SS</sub> = - 5V V <sub>is</sub> (A) = 5V(p-p) 20 Log <sub>10</sub> $\frac{V_{os}(B)}{V_{is}(A)}$ = - 50 dB				0.9				MHz				
C <sub>is</sub> C <sub>os</sub> C <sub>ios</sub>	Capacitance Input Output Feedthrough	V <sub>DD</sub> = - 5V, V <sub>C</sub> = V <sub>SS</sub> = - 5V				4 4 0.2				pF				
t <sub>pd</sub>	Propagation Delay Signal Input to Signal Output	V <sub>C</sub> = V <sub>DD</sub> = + 10V, V <sub>SS</sub> = GND, C <sub>L</sub> = 15pF V <sub>is</sub> = 10V (square wave) t <sub>r</sub> = t <sub>f</sub> = 20 ns (input Signal)				10				ns				
CONTROL (V <sub>C</sub> )														
V <sub>THC</sub>	Switch Threshold Voltage	V <sub>is</sub> ≤ V <sub>CD</sub> V <sub>DD</sub> - V <sub>SS</sub> = 15V, 10V, 5V I <sub>IS</sub> = 10 μA				0.5	1.5	2.7		V				
I <sub>C</sub>	Input Current	V <sub>DD</sub> - V <sub>SS</sub> = 10V V <sub>C</sub> ≤ V <sub>DD</sub> - V <sub>SS</sub>				± 10				pA				
C <sub>C</sub>	Average Input Capacitance					5				pF				
	Crosstalk - Control Input to Signal Output	V <sub>DD</sub> - V <sub>SS</sub> = 10V V <sub>C</sub> = 10V R <sub>L</sub> = 10 kΩ (square wave)				50				mV				
t <sub>pdC</sub>	Turn "ON" Propagation Delay	t <sub>rc</sub> = t <sub>fc</sub> = 20 ns V <sub>is</sub> < 10V, C <sub>L</sub> = 15 pF				20				ns				
Note 1: The device should not be connected to circuits with the power on. Note 2: ± 10 × 10 <sup>-3</sup> . Note 3: Symmetrical about 0V.														

# Electrical Characteristics CD4016C (Continued)

Sym.	Characteristic	Test Conditions	Limits									Units
			-40°C			25°C			85°C			
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	

CONTROL (V <sub>C</sub> ) Continued													
	Maximum Allowable Control Input Repetition Rate	V <sub>DD</sub> = 10V, V <sub>SS</sub> = GND, R <sub>L</sub> = 1 Ω C <sub>i</sub> = 15 pF V <sub>C</sub> = 10V (square wave) t <sub>r</sub> = t <sub>f</sub> = 20 ns					10						MHz


Note 1: The device should not be connected to circuits with the power on. Note 2:  $\pm 10 \times 10^{-3}$ . Note 3: Symmetrical about 0V.

## Typical ON Resistance Characteristics

Characteristic*	Supply Conditions		Load Conditions					
			R <sub>L</sub> = 1 kΩ		R <sub>L</sub> = 10 kΩ		R <sub>L</sub> = 100 kΩ	
	V <sub>DD</sub> (V)	V <sub>SS</sub> (V)	Value (Ω)	V <sub>IS</sub> (V)	Value (Ω)	V <sub>IS</sub> (V)	Value (Ω)	V <sub>IS</sub> (V)
R <sub>ON</sub>	+15	0	200	+15	200	+15	180	+15
R <sub>ON(max)</sub>	+15	0	200	0	200	0	200	0
R <sub>ON</sub>	+10	0	300	+11	300	+9.3	320	+9.2
R <sub>ON(max)</sub>	+10	0	290	+10	250	+10	240	+10
R <sub>ON</sub>	+5	0	290	0	250	0	300	0
R <sub>ON(max)</sub>	+5	0	500	+7.4	560	+5.6	610	+5.5
R <sub>ON</sub>	+5	0	860	+5	470	+5	450	+5
R <sub>ON(max)</sub>	+5	0	600	0	580	0	800	0
R <sub>ON</sub>	+7.5	-7.5	1.7k	+4.2	7k	+2.9	33k	+2.7
R <sub>ON</sub>	+7.5	-7.5	200	+7.5	200	+7.5	180	+7.5
R <sub>ON(max)</sub>	+7.5	-7.5	200	-7.5	200	-7.5	180	-7.5
R <sub>ON</sub>	+7.5	-7.5	290	±0.25	280	±25	400	±0.25
R <sub>ON</sub>	+5	-5	260	+5	250	+5	240	+5
R <sub>ON(max)</sub>	+5	-5	310	-5	250	-5	240	-5
R <sub>ON</sub>	+5	-5	600	±0.25	580	±0.25	760	±0.25
R <sub>ON</sub>	+2.5	-2.5	590	+2.5	450	+2.5	490	+2.5
R <sub>ON(max)</sub>	+2.5	-2.5	720	-2.5	520	-2.5	520	-2.5
R <sub>ON</sub>	+2.5	-2.5	232k	±0.25	300k	±0.25	870k	±0.25


\*Variation from a perfect switch: R<sub>ON</sub> = 0Ω.

## Physical Dimensions inches (millimeters)

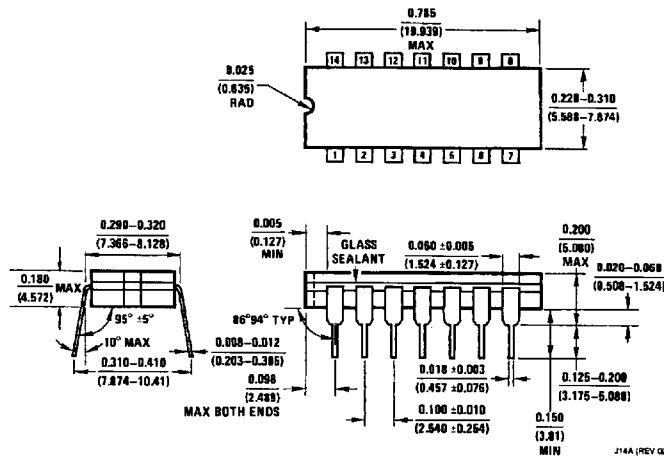


Dual-in-Line Package (J)  
Order Number CD4016MJ or CD4016CJ  
NS Package J14A

## Physical Dimensions inches (millimeters) (Continued)

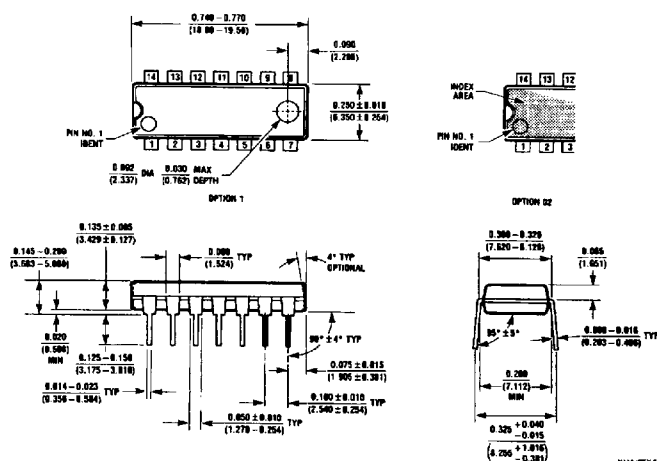

**Dual-In-Line Package (N)**  
**Order Number CD4016CN**  
**NS Package N14A**

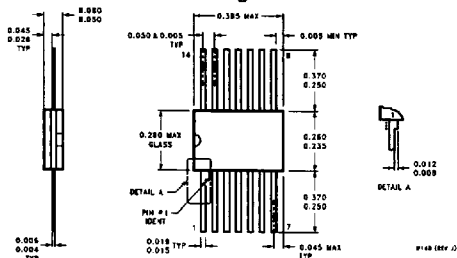

**Dual-In-Line Package (W)**  
**Order Number CD4016MW**  
**NS Package W14B**

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.