



# A 7060

## Features:

- epoxy-encapsulated housing
- small dimensions

## Application:

- indicator control in pocket cameras
- light intensity control of radio clocks
- exposure meters
- contrast control of TV sets

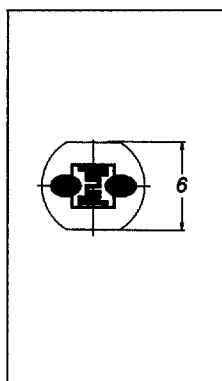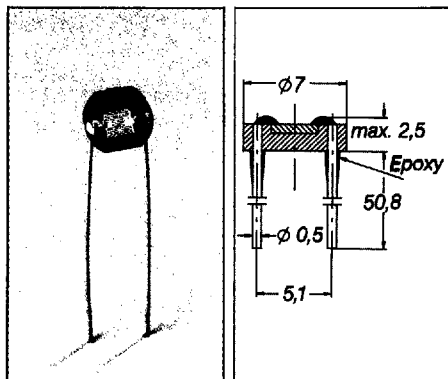

TYP	R <sub>10</sub> [k Ω]	R <sub>01</sub> [k Ω]	R <sub>05</sub> [k Ω]	V <sub>max</sub> [V]	P <sub>max</sub> [mW]	t <sub>on</sub> [ms]	t <sub>off</sub> [ms]	TK [% K]
A 7060 09	6	40	120	100	90	60	35	0,4
7060 11	14	60	180	150	90	60	35	0,3
7060 12	24	180	540	150	90	50	30	0,35
7060 13	57	500	1.500	150	90	35	28	0,4
7060 14	215	11.000	33.000	150	90	20	25	0,5

