

D200RP Series

Short Circuit Protected Regulated, 2W SIP DC/DC Converters



Key Features:

- 2W Output Power
- Short Circuit Protection
- Tight Line/Load Regulation
- 1,000 VDC Isolation
- Miniature SIP Case
- >1.5 MHour MTBF
- 15 Standard Models

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Input Filter	π (Pi) Filter				
Reverse Polarity Input Current				0.3	A

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy				±2.0	%
Line Regulation	For Vin Min to Max			±0.5	%
Load Regulation (Note 1)				±0.5	%
Ripple & Noise (20 MHz) (Note 2)				75	mV P - P
Output Power Protection		120			%
Temperature Coefficient				±0.02	%/°C
Output Short Circuit	Continuous				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			40		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-25	+25	+71	°C
Operating Temperature Range	Case	-25		+85	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	1.26 x 0.32 x 0.55 Inches (32.0 x 8.0 x 14.0 mm)
Case Material	Non-Conductive Black Plastic (UL94-V0)
Weight	0.17 Oz (4.8g)

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.5			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C
Internal Power Dissipation	All Models			450	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

MicroPower Direct

232 Tosca Drive
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowereirect.com
W: www.micropowereirect.com




Model Selection Guide

Model Number	Input				Output			Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
	Nominal	Range	Full-Load	No-Load					
D201RP	5	4.5 - 5.5	606	80	5.0	400.0	40.0	66	1,000
D202RP	5	4.5 - 5.5	606	80	9.0	222.0	22.0	66	1,000
D203RP	5	4.5 - 5.5	571	80	12.0	167.0	17.0	70	1,000
D204RP	5	4.5 - 5.5	571	80	15.0	133.0	13.0	70	1,000
D205RP	5	4.5 - 5.5	588	80	24.0	83.0	10.0	68	1,000
D211RP	12	10.8 - 13.2	253	45	5.0	400.0	40.0	66	500
D212RP	12	10.8 - 13.2	253	45	9.0	222.0	22.0	66	500
D213RP	12	10.8 - 13.2	238	45	12.0	167.0	17.0	70	500
D214RP	12	10.8 - 13.2	238	45	15.0	133.0	13.0	70	500
D215RP	12	10.8 - 13.2	246	45	24.0	83.0	10.0	68	500
D221RP	24	21.6 - 26.4	130	25	5.0	400.0	40.0	64	200
D222RP	24	21.6 - 26.4	130	25	9.0	222.0	22.0	64	200
D223RP	24	21.6 - 26.4	122	25	12.0	167.0	17.0	68	200
D224RP	24	21.6 - 26.4	122	25	15.0	133.0	13.0	68	200
D225RP	24	21.6 - 26.4	118	25	24.0	83.0	10.0	70	200

Notes:

- Output load regulation is specified for a load change of 20% to 100%.
- When measuring output ripple, it is recommended that an external 0.33 μ F ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- These do not require external components to operate, but the use of a low ESR capacitor (approximately 10 μ F, ESR <1.0 Ω at 100 kHz) mounted close to the converter input pins is recommended.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Derating Curve

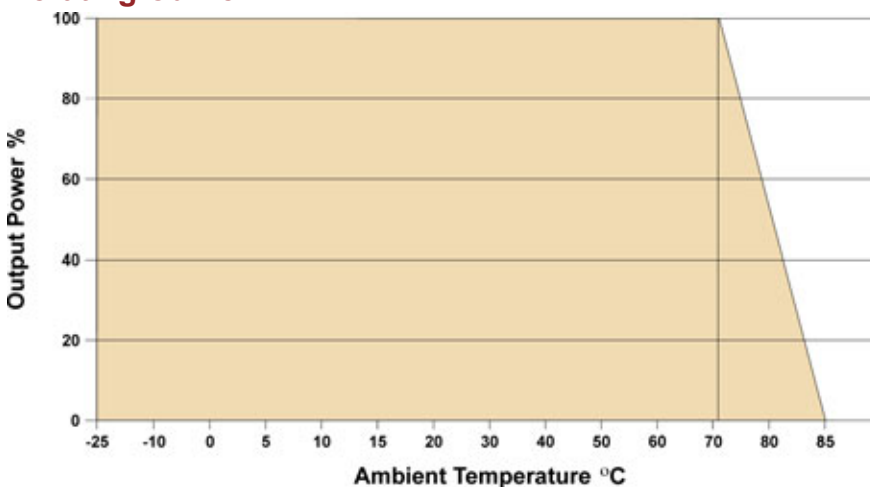

Capacitive Load


μ F Max
470

Pin Connections

Pin	Function
1	+Vin
2	NC
3	NC
9	NC
10	-Vout
11	+Vout
12	-Vin

NC: No Connection

Mechanical Dimensions

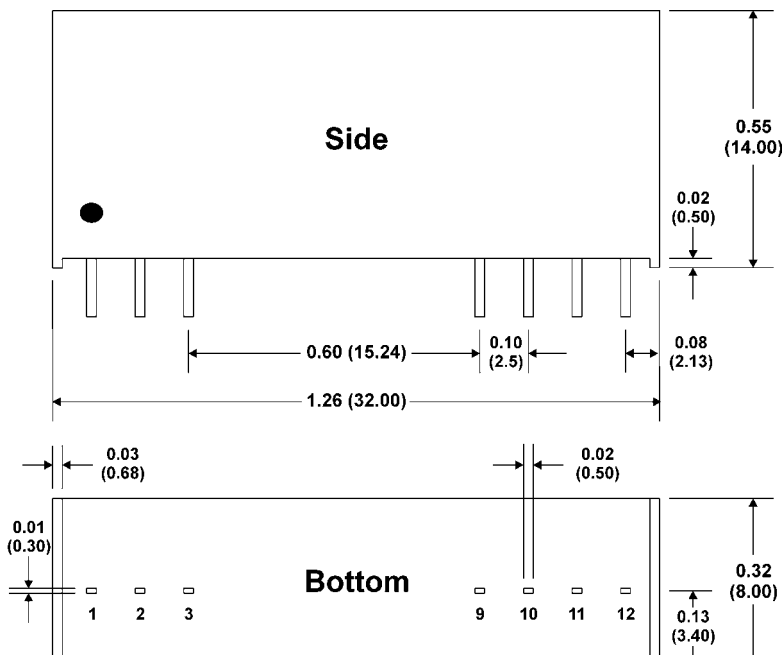

Notes:

All dimensions are typical in inches (mm)

Tolerance x.xx = ± 0.01 (± 0.25)

Pin 1 is marked by a "dot" or indentation on the side of the unit



MicroPower Direct
www.micropowerdirect.com