


P600A THRU P600M

GENERAL PURPOSE PLASTIC RECTIFIER


Reverse Voltage - 50 to 1000 Volts **Forward Current** - 6.0 Amperes

Case Style P600

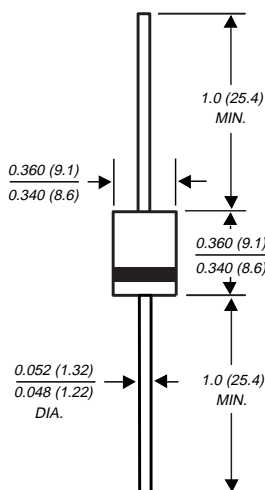

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
 - ◆ High forward current capability
 - ◆ Construction utilizes void-free molded plastic technique
 - ◆ High surge current capability
 - ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension
- 



MECHANICAL DATA

Case: Void-free molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.07 ounce, 2.1 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

[illegible]

NOTES:

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (2) Reverse recovery time conditions: $I_F=0.5A$, $I_R=1.0A$, $I_T=0.25A$
- (3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted with 1.1 x 1.1 (30 x 30mm) copper pads

RATINGS AND CHARACTERISTIC CURVES P600A THRU P600M

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURRENT

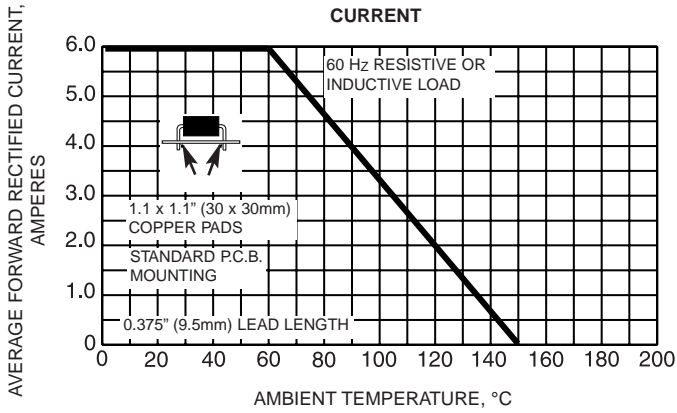


FIG. 2 - MAXIMUM FORWARD CURRENT DERATING CURVE

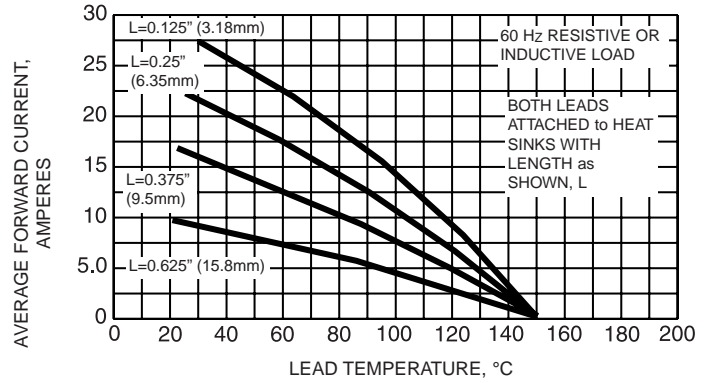


FIG. 3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

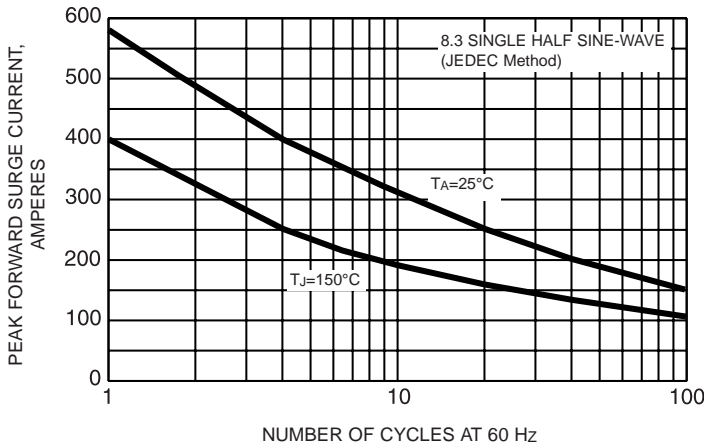


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

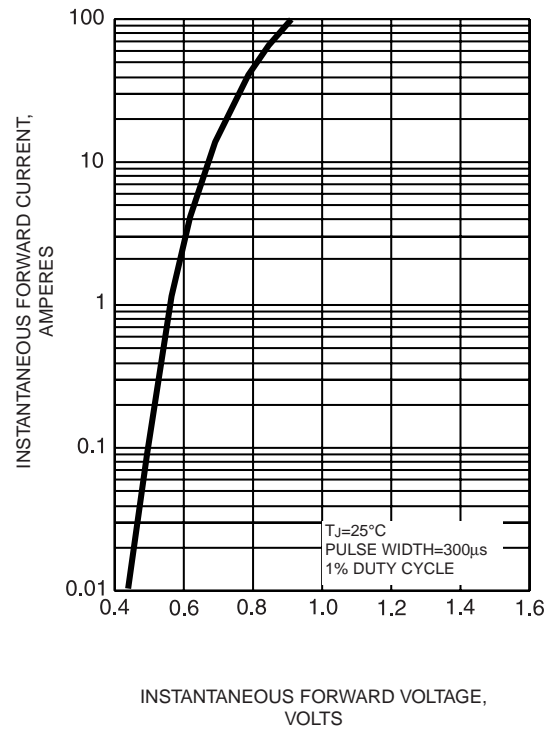


FIG. 5 - TYPICAL REVERSE CHARACTERISTIC

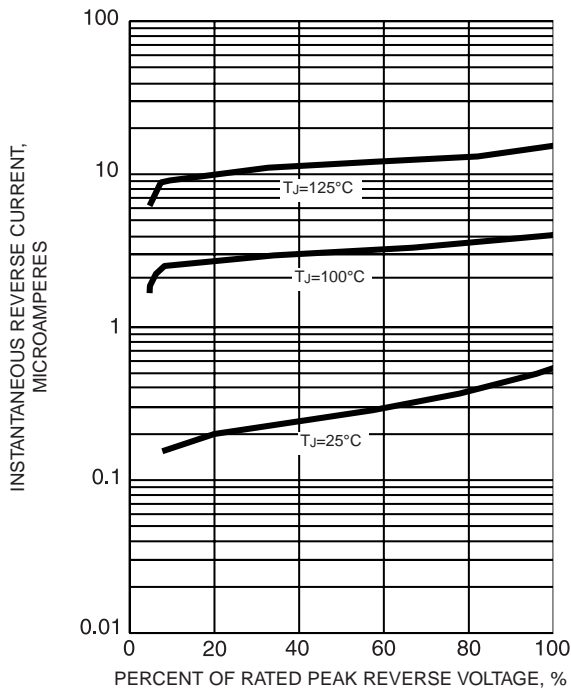


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

