

MAXIM

+5V, +10V Precision Voltage References

REF01/REF02

General Description

The REF01 and REF02 are precision voltage references that are pretrimmed to within $\pm 3\%$ of +10V and +5V, respectively. Both references feature excellent temperature stability (as low as 8.5 ppm/ $^{\circ}\text{C}$ worst case), low current drain, and low noise. The REF02 also provides a TEMP pin whose output voltage varies linearly with temperature, making this device suitable for a wide variety of temperature-sensing and control applications. Both devices are available from Maxim in the space-saving SO package, as well as in the standard 8-pin TO-99 and MINI-DIP packages.

Features

- ◆ Pretrimmed to +5V, +10V $\pm 0.3\%$
- ◆ Excellent Temperature Stability: 3ppm/ $^{\circ}\text{C}$
- ◆ Low Noise: 10 $\mu\text{Vp-p}$ (REF02)
- ◆ Low Supply Current: 1.4mA max
- ◆ Short-Circuit Proof
- ◆ Linear Temperature Transducer O/P (REF02)

Ordering Information


| PART | TEMP. RANGE | MAX TEMPCO (ppm/ $^{\circ}\text{C}$) | INITIAL ERROR (mV) | PIN-PACKAGE |
|-----------|---|---------------------------------------|--------------------|---------------|
| REF01EP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 8.5 | ± 30 | 8 Plastic DIP |
| REF01EZ | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 8.5 | ± 30 | 8 Cerdip |
| REF01HP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 25 | ± 50 | 8 Plastic DIP |
| REF01HSA | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 25 | ± 50 | 8 SO |
| REF01CP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 100 | 8 Plastic DIP |
| REF01CSA | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 100 | 8 SO |
| REF01CZ | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 100 | 8 Cerdip |
| REF01CESA | -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$ | 65 | ± 100 | 8 SO |
| REF01Z | -55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$ | 25 | ± 50 | 8 Cerdip |
| REF02EP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 8.5 | ± 15 | 8 Plastic DIP |
| REF02EZ | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 8.5 | ± 15 | 8 Cerdip |
| REF02HP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 25 | ± 25 | 8 Plastic DIP |
| REF02HSA | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 25 | ± 25 | 8 SO |
| REF02CP | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 50 | 8 Plastic DIP |
| REF02CSA | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 50 | 8 SO |
| REF02CZ | 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 65 | ± 50 | 8 Cerdip |
| REF02CESA | -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$ | 65 | ± 50 | 8 SO |
| REF02Z | -55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$ | 25 | ± 25 | 8 Cerdip |

Ordering Information continued at end of data sheet.

Applications

A to D Converters
D to A Converters
Digital Voltmeters
Voltage Regulators
Threshold Detectors

Typical Operating Circuit

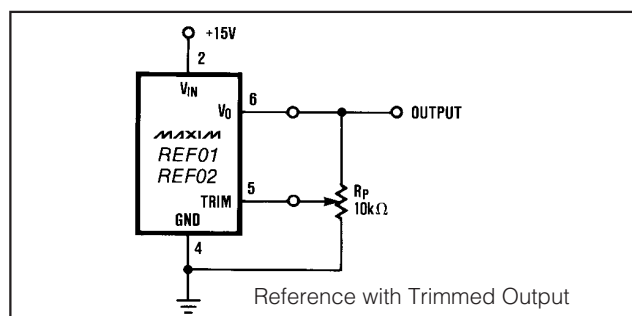

+5V, +10V Precision Voltage References

ABSOLUTE MAXIMUM RATINGS—REF01

| | |
|---|------------|
| Input Voltage | |
| REF01, A, E, H, All DICE | 40V |
| REF01C | 30V |
| Power Dissipation | |
| T099 (J) (derate at 7.1mW/°C above 80°C) | 500mW |
| CERDIP (2) (derate at 6.7mW/°C above 75°C) | 500mW |
| Plastic Dip (P) (derate at 5.6mW/°C above 36°C) | 500mW |
| Small Outline (S) (derate at 5.0mW/°C above 55°C) | 300mW |
| Output Short-Circuit Duration | |
| (to ground or V_{IN}) | Indefinite |

| | |
|-------------------------------------|-----------------|
| Storage Temperature Range | -65°C to +150°C |
| Operating Temperature Range | |
| REF01A, REF01 | -55°C to +125°C |
| REF01E, REF01H, REF01C | |
| (except REF01CESA) | 0°C to +70°C |
| REF01CESA | -40°C to +85°C |
| DICE Junction Temperature (T_J) | -65°C to +150°C |
| Lead Temperature (soldering, 60s) | +300°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF01A/E | | | REF01/H | | | UNITS |
|--------------------------|-------------------|-------------------------------|-----------|-----------|-------|-----------|-----------|-------|---------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage | V_O | $I_L = 0$ | 9.97 | 10.00 | 10.03 | 9.95 | 10.00 | 10.05 | V |
| Output Adjustment Range | ΔV_{trim} | $R_p = 10k\Omega$ | ± 3.0 | ± 3.3 | — | ± 3.0 | ± 3.3 | — | % |
| Output Voltage Noise | e_{np-p} | 0.1Hz to 10Hz (Note 5) | — | 20 | 30 | — | 20 | 30 | μV_{p-p} |
| Line Regulation (Note 4) | | $V_{IN} = 13V$ to 33V | — | 0.006 | 0.010 | — | 0.006 | 0.010 | %/V |
| Load Regulation (Note 4) | | $I_L = 0$ to 10mA | — | 0.005 | 0.008 | — | 0.006 | 0.010 | %/mA |
| Turn-on Settling Time | t_{ON} | To $\pm 0.1\%$ of final value | — | 5 | — | — | 5 | — | μs |
| Quiescent Supply Current | I_{SY} | No Load | — | 1.0 | 1.4 | — | 1.0 | 1.4 | mA |
| Load Current | I_L | | 10 | 21 | — | 10 | 21 | — | mA |
| Sink Current | I_S | | -0.3 | -0.5 | — | -0.3 | -0.5 | — | mA |
| Short-Circuit Current | I_{SC} | $V_O = 0$ | — | 30 | — | — | 30 | — | mA |

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $-55^\circ C \leq T_A \leq +125^\circ C$ for REF01A and REF01, $0^\circ C \leq T_A \leq +70^\circ C$ for REF01E and REF01H, $I_L = 0mA$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF01A/E | | | REF01/H | | | UNITS |
|--|-----------------|---|----------|----------------|----------------|---------|----------------|----------------|--------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage Change with Temperature (Notes 1, 2) | ΔV_{OT} | $0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$ | — | 0.02 0.06 | 0.06 0.15 | — | 0.07 0.18 | 0.17 0.45 | % |
| Output Voltage Temperature Coefficient | TCV_O | (Note 3) | — | 3.0 | 8.5 | — | 10.0 | 25.0 | ppm/°C |
| Change in V_O Temperature Coefficient with Output Adjustment | | $R_p = 10k\Omega$ | — | 0.7 | — | — | 0.7 | — | ppm/% |
| Line Regulation ($V_{IN} = 13V$ to 33V) (Note 4) | | $0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$ | — | 0.007 0.009 | 0.012 0.015 | — | 0.007 0.009 | 0.012 0.015 | %/V |
| Load Regulation ($I_L = 0$ to 8mA) (Note 4) | | $0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$ | — | 0.006 0.007 | 0.010 0.012 | — | 0.007 0.009 | 0.012 0.015 | %/mA |

Note 1: ΔV_{OT} is defined as the absolute difference between the maximum output voltage and the minimum output voltage over the specified temperature range expressed as a percentage of 10V:

$$\Delta V_{OT} = \left| \frac{V_{MAX} - V_{MIN}}{10V} \right| \times 100$$

Note 2: ΔV_{OT} specification applies trimmed to +10.000V or untrimmed.

Note 3: TCV_O is defined as ΔV_{OT} divided by the temperature range.

Note 4: Line and Load Regulation specifications include the effect of self heating.

Note 5: Sample tested.

+5V, +10V Precision Voltage References

REF01/REF02

ELECTRICAL CHARACTERISTICS—REF01 (continued)

($V_{IN} = +15V$, $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF01C | | | UNITS |
|--------------------------|-------------------|--|-----------|----------------|----------------|---------------|
| | | | MIN | TYP | MAX | |
| Output Voltage | V_O | $I_L = 0mA$ | 9.90 | 10.00 | 10.10 | V |
| Output Adjustment Range | ΔV_{trim} | $R_p = 10k\Omega$ | ± 2.7 | ± 3.3 | — | % |
| Output Voltage Noise | e_{np-p} | 0.1Hz to 10Hz (Note 5) | — | 25 | 35 | μV_{p-p} |
| Line Regulation (Note 4) | | $V_{IN} = 13V$ to $30V$ | — | 0.009 | 0.015 | %/V |
| Load Regulation (Note 4) | | $I_L = 0$ to $8mA$ $I_L = 0$ to $4mA$ | — — | 0.006 0.006 | 0.015 0.015 | %/mA |
| Turn-on Settling Time | t_{ON} | To $\pm 0.1\%$ of final value | — | 5 | — | μs |
| Quiescent Supply Current | I_{SY} | No Load | — | 1.0 | 1.6 | mA |
| Load Current | I_L | | 8 | 21 | — | mA |
| Sink Current | I_S | | -0.2 | -0.5 | — | mA |
| Short-Circuit Current | I_{SC} | $V_O = 0$ | — | 30 | — | mA |

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF01C | | | UNITS |
|--|-----------------|-------------------------|--------|-------|-------|-----------------|
| | | | MIN | TYP | MAX | |
| Output Voltage Change with Temperature | ΔV_{OT} | (Notes 1 and 2) | — | 0.14 | 0.45 | % |
| Output Voltage Temperature Coefficient | TCV_O | (Note 3) | — | 20 | 65 | ppm/ $^\circ C$ |
| Change in V_O Temperature Coefficient with Output Adjustment | | $R_p = 10k\Omega$ | — | 0.7 | — | ppm/% |
| Line Regulation (Note 4) | | $V_{IN} = 13V$ to $30V$ | — | 0.011 | 0.018 | %/V |
| Load Regulation (Note 4) | | $I_L = 0$ to $5mA$ | — | 0.008 | 0.018 | %/mA |

Notes: See previous page.

Output Adjustment

The REF01 trim terminal can be used to adjust the voltage over a $10V \pm 300mV$ range. This feature allows the system designer to trim system errors by setting the reference to a voltage other than 10V, including 10.240V for binary applications (see the *Typical Operating Circuit* section).

Adjustment of the output does not significantly affect the temperature performance of the device. The temperature coefficient change is approximately 0.7ppm/ $^\circ C$ for 100mV of output adjustment.

+5V, +10V Precision Voltage References

ABSOLUTE MAXIMUM RATINGS—REF02

| | |
|---|-----------------|
| Input Voltage | |
| REF02, A, E, H, All DICE | 40V |
| REF02C, D | 30V |
| Power Dissipation | |
| T099 (J) (Derate at 7.1mW/°C above 80°C) | 500mW |
| CERDIP (2) (Derate at 6.7mW/°C above 75°C) | 500mW |
| Plastic Dip (P) (Derate at 5.6mW/°C above 36°C) | 500mW |
| Small Outline (S) (Derate at 5.0mW/°C above 55°C) | 300mW |
| Storage Temperature Range | -65°C to +150°C |

| | |
|---|-----------------|
| Operating Temperature Range | |
| REF02A, REF02 | -55°C to +125°C |
| REF02E, REF02H (Except REF02CESA) | 0°C to +70°C |
| REF02C (except REF02CESA), REF02D | 0°C to +70°C |
| REF02CESA | -40°C to +85°C |
| Lead Temperature (Soldering, 60s) | +300°C |
| DICE Junction Temperature (T _J) | -65°C to +150°C |
| Output Short-Circuit Duration (to Ground or V _{IN}) | Indefinite |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—REF02

(V_{IN} = +15V, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF02A/E | | | REF02/H | | | UNITS |
|----------------------------|--------------------|-----------------------------|----------|-------|-------|---------|-------|-------|-------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage | V _O | I _L = 0 | 4.985 | 5.000 | 5.015 | 4.975 | 5.000 | 5.025 | V |
| Output Adjustment Range | ΔV _{trim} | R _p = 10kΩ | ±3 | ±6 | — | ±3 | ±6 | — | % |
| Output Voltage Noise | e _{np-p} | 0.1Hz to 10Hz (Note 6) | — | 10 | 15 | — | 10 | 15 | μV _{p-p} |
| Line Regulation (Note 1) | | V _{IN} = 8V to 33V | — | 0.006 | 0.010 | — | 0.006 | 0.010 | %/V |
| Load Regulation (Note 1) | | I _L = 0 to 10mA | — | 0.005 | 0.010 | — | 0.006 | 0.010 | %/mA |
| Turn-on Settling Time | t _{ON} | To ±0.1% of final value | — | 5 | — | — | 5 | — | μs |
| Quiescent Supply Current | I _{SY} | No Load | — | 1.0 | 1.4 | — | 1.0 | 1.4 | mA |
| Load Current | I _L | | 10 | 21 | — | 10 | 21 | — | mA |
| Sink Current | I _S | | -0.3 | -0.5 | — | -0.3 | -0.5 | — | mA |
| Short-Circuit Current | I _{SC} | V _O = 0 | — | 30 | — | — | 30 | — | mA |
| Temperature Voltage Output | V _T | (Note 2) | — | 630 | — | — | 630 | — | mV |

ELECTRICAL CHARACTERISTICS—REF01

(V_{IN} = +15V, -55°C ≤ T_A ≤ +125°C for REF02A and REF02, 0°C ≤ T_A ≤ +70°C for REF02E and REF02H, I_L = 0mA, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF02A/E | | | REF02/H | | | UNITS |
|---|------------------|---|----------|----------------|----------------|---------|----------------|----------------|--------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage Change with Temperature (Notes 3, 4) | ΔV _{OT} | 0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C | — | 0.02 0.06 | 0.06 0.15 | — | 0.07 0.18 | 0.17 0.45 | % |
| Output Voltage Temperature Coefficient | TCV _O | (Note 5) | — | 3 | 8.5 | — | 10 | 25 | ppm/°C |
| Change in V _O Temperature Coefficient with Output Adjustment | | R _p = 10kΩ | — | 0.7 | — | — | 0.7 | — | ppm/% |
| Line Regulation (V _{IN} = 8V to 33V) (Note 1) | | 0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C | — | 0.007 0.009 | 0.012 0.015 | — | 0.007 0.009 | 0.012 0.015 | %/V |
| Load Regulation (I _L = 0 to 8mA) (Note 1) | | 0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C | — | 0.006 0.007 | 0.010 0.012 | — | 0.007 0.009 | 0.012 0.015 | %/mA |
| Temperature Voltage Output Temperature Coefficient | TCV _T | (Note 2) | — | 2.1 | — | — | 2.1 | — | mV/°C |

Note 1: Line and Load Regulation specifications include the effect of self heating.

Note 2: Limit current in or out of pin 3 to 50nA and capacitance on pin 3 to 30pF.

Note 3: ΔV_{OT} is defined as the absolute difference between the maximum output voltage and the minimum output voltage over the specified temperature range expressed as a percentage of 5V:

$$\Delta V_{OT} = \left| \frac{V_{MAX} - V_{MIN}}{5V} \right| \times 100$$

Note 4: ΔV_{OT} specification applies trimmed to +5.000V or untrimmed.

Note 5: TCV_O is defined as ΔV_{OT} divided by the temperature range.

Note 6: Sample tested.

+5V, +10V Precision Voltage References

REF01/REF02

ELECTRICAL CHARACTERISTICS—REF02

($V_{IN} = +15V$, $T_A = +25^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF02C | | | REF02D | | | UNITS |
|----------------------------|-------------------|--|-----------|------------|------------|-----------|------------|-----------|---------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage | V_O | $I_L = 0mA$ | 4.950 | 5.000 | 5.050 | 4.900 | 5.000 | 5.100 | V |
| Output Adjustment Range | ΔV_{trim} | $R_p = 10k\Omega$ | ± 2.7 | ± 6.0 | — | ± 2.0 | ± 6.0 | — | % |
| Output Voltage Noise | e_{np-p} | 0.1Hz to 10Hz (Note 6) | — | 12 | 18 | — | 12 | — | μV_{p-p} |
| Line Regulation (Note 1) | | $V_{IN} = 8V$ to $30V$ | — | 0.009 | 0.015 | — | 0.010 | 0.04 | %/V |
| Load Regulation (Note 1) | | $I_L = 0$ to $8mA$ $I_L = 0$ to $4mA$ | — — | 0.006 — | 0.015 — | — — | — 0.015 | — 0.04 | %/mA |
| Turn-on Settling Time | t_{ON} | To $\pm 0.1\%$ of final value | — | 5 | — | — | 5 | — | μs |
| Quiescent Supply Current | I_{SY} | No Load | — | 1.0 | 1.6 | — | 1.0 | 2.0 | mA |
| Load Current | I_L | | 8 | 21 | — | 8 | 21 | — | mA |
| Sink Current | I_S | | -0.2 | -0.5 | — | -0.2 | -0.5 | — | mA |
| Short-Circuit Current | I_{SC} | $V_O = 0$ | — | 30 | — | — | 30 | — | mA |
| Temperature Voltage Output | V_T | (Note 2) | — | 630 | — | — | 630 | — | mV |

ELECTRICAL CHARACTERISTICS—REF02

($V_{IN} = +15V$, $T_A = T_{MIN}$ to T_{MAX} and $I_L = 0mA$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | REF02C | | | REF02D | | | UNITS |
|--|-----------------|------------------------|--------|-------|-------|--------|-------|------|------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Voltage Change with Temperature | ΔV_{OT} | (Notes 3 and 4) | — | 0.14 | 0.45 | — | 0.49 | 1.7 | % |
| Output Voltage Temperature Coefficient | TCV_O | (Note 5) | — | 20 | 65 | — | 70 | 250 | ppm/ $^{\circ}C$ |
| Change in V_O Temperature Coefficient with Output Adjustment | | $R_p = 10k\Omega$ | — | 0.7 | — | — | 0.7 | — | ppm/% |
| Line Regulation (Note 1) | | $V_{IN} = 8V$ to $30V$ | — | 0.011 | 0.018 | — | 0.012 | 0.05 | %/V |
| Load Regulation (Note 1) | | $I_L = 0$ to $5mA$ | — | 0.008 | 0.018 | — | 0.016 | 0.05 | %/mA |
| Temperature Voltage Output Temperature Coefficient | TCV_T | (Note 2) | — | 2.1 | — | — | 2.1 | — | mV/ $^{\circ}C$ |

Notes: See previous page.

Output Adjustment

The REF02 trim terminal can be used to adjust the output voltage over a $5V \pm 300mV$ range. This feature allows the system designer to trim errors by setting the reference to a voltage other than 5V (refer to the *Typical Operating Circuit* section).

Adjustment of the output does not significantly affect the temperature performance of the device. Typically, the temperature coefficient change is 0.7ppm/ $^{\circ}C$ for 100mV of output adjustment.

Temperature Voltage Output

The REF02 provides a temperature-dependent output voltage on the TEMP pin. This voltage is proportional to the absolute temperature, and has a scale factor of approximately 2.1mV/ $^{\circ}C$ (Figure 2).

$$\text{Output Voltage} = 2.1(T + 273)mV$$

where T = Temperature in $^{\circ}C$










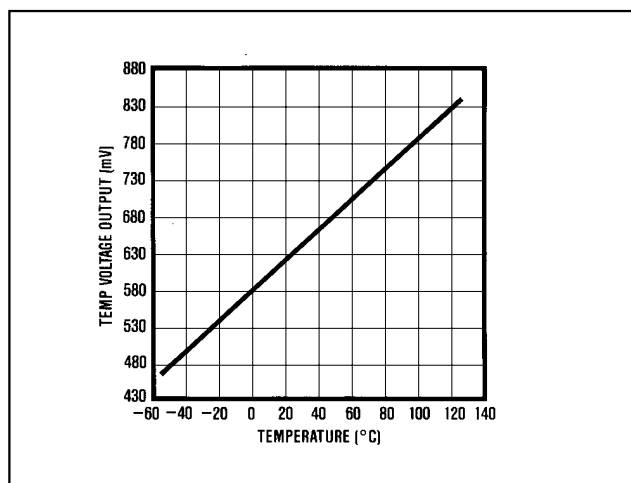


Figure 2. REF02 Temperature/Voltage Output vs. Temperature

+5V, +10V Precision Voltage References

Typical Operating Characteristics

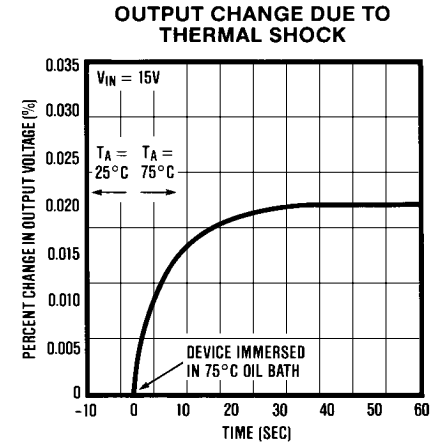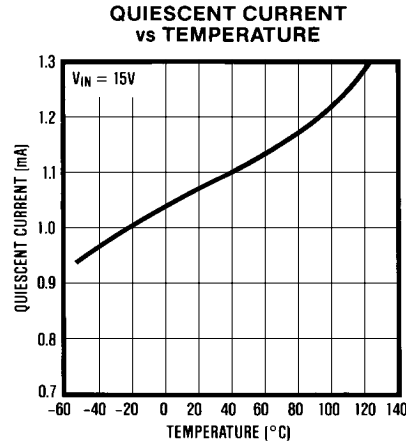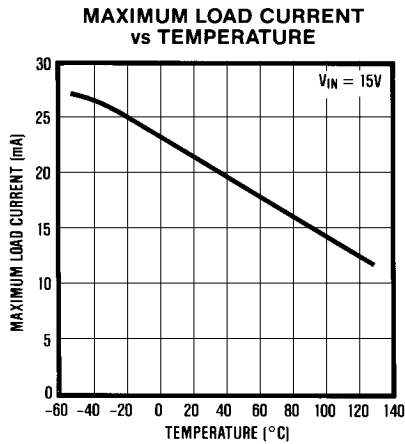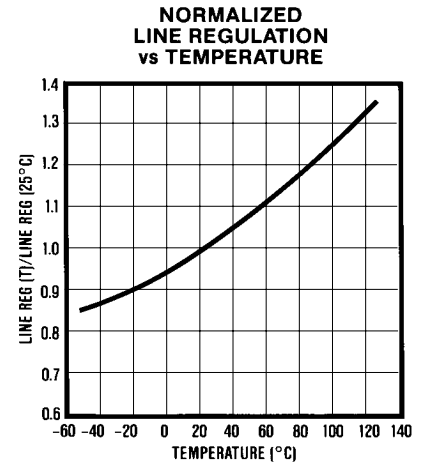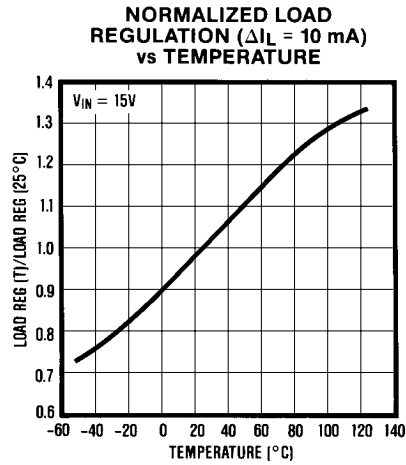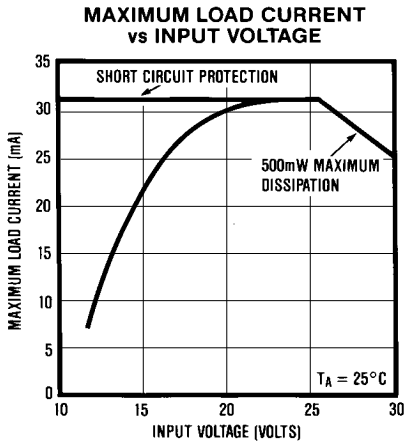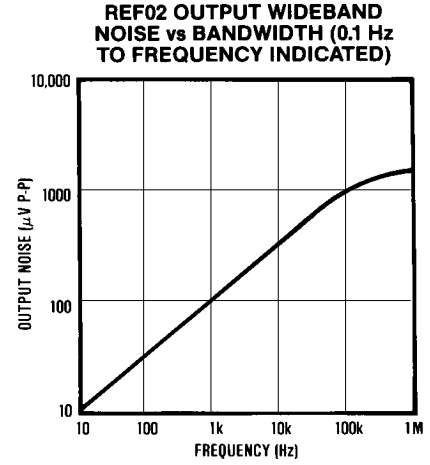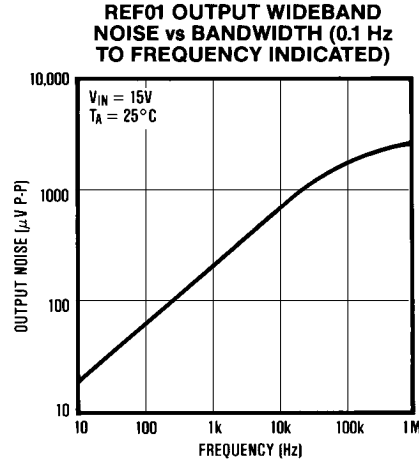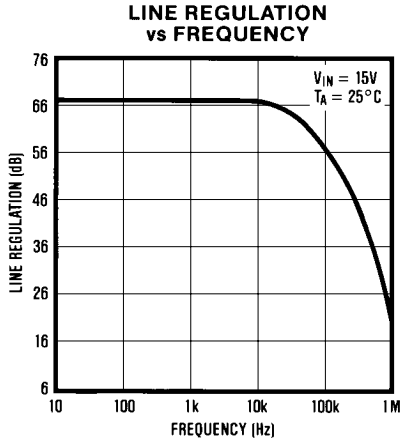

+5V, +10V Precision Voltage References

Typical Applications

REF01/REF02

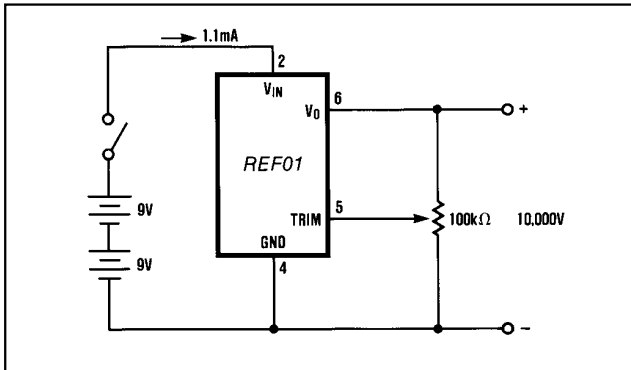


Figure 3. Precision Calibration Standard

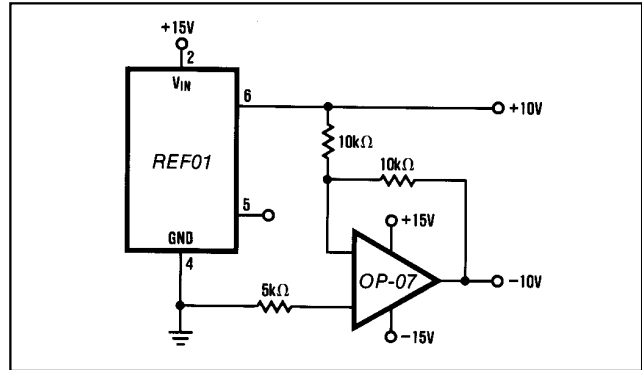


Figure 4. ±10V Reference

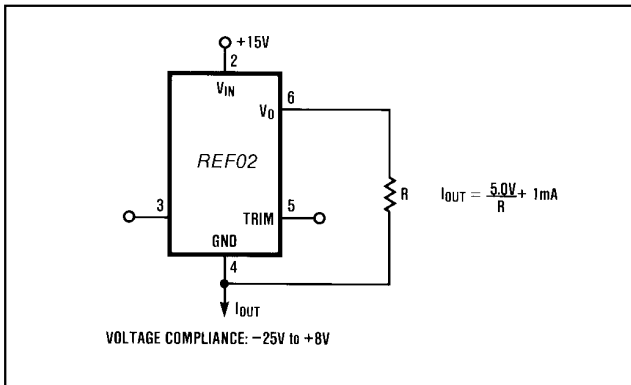


Figure 5. Current Source


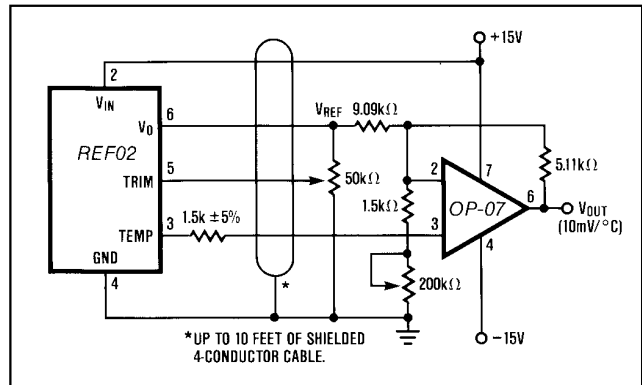


Figure 6. Precision Temperature Transducer with Remote Sensor

Chip Topography

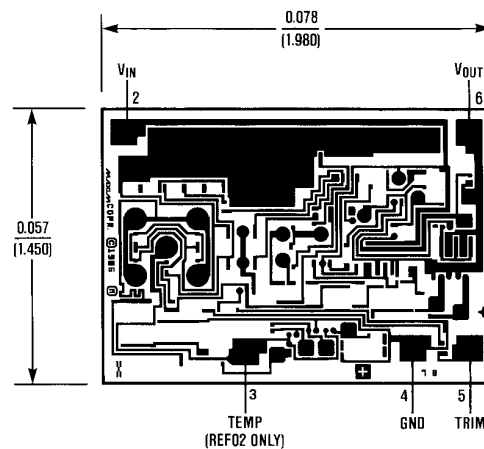

+5V, +10V Precision Voltage References

Ordering Information (continued)

| PART | TEMP. RANGE | MAX. TEMPCO (ppm/°C) | INITIAL ERROR (mV) | PIN-PACKAGE |
|------------|-----------------|----------------------|--------------------|----------------|
| REF01EJ* | 0°C to +70°C | 8.5 | ±30 | 8 TO-99 |
| REF01HF* | 0°C to +70°C | 25 | ±50 | 8 TO-99 |
| REF01CJ* | 0°C to +70°C | 65 | ±100 | 8 TO-99 |
| REF01HZ* | 0°C to +70°C | 25 | ±50 | 8 Hermetic DIP |
| REF01CP-2* | 0°C to +70°C | 65 | ±100 | 8 Plastic DIP |
| REF01AJ* | -55°C to +125°C | 8.5 | ±30 | 8 TO-99 |
| REF01J* | -55°C to +125°C | 25 | ±50 | 8 TO-99 |
| REF01AZ* | -55°C to +125°C | 8.5 | ±15 | 8 Hermetic DIP |
| REF02EJ* | 0°C to +70°C | 8.5 | ±15 | 8 TO-99 |
| REF02HJ* | 0°C to +70°C | 25 | ±25 | 8 TO-99 |
| REF02CJ* | 0°C to +70°C | 65 | ±50 | 8 TO-99 |
| REF02DJ* | 0°C to +70°C | 250 | ±100 | 8 TO-99 |
| REF02HZ* | 0°C to +70°C | 25 | ±25 | 8 Hermetic DIP |
| REF02DP* | 0°C to +70°C | 250 | ±100 | 8 Plastic DIP |
| REF02DSA* | 0°C to +70°C | 250 | ±100 | 8 SO |
| REF02AJ* | -55°C to +125°C | 8.5 | ±15 | 8 TO-99 |
| REF02J* | -55°C to +125°C | 25 | ±25 | 8 TO-99 |
| REF02AZ* | -55°C to +125°C | 8.5 | ±15 | 8 Hermetic DIP |

*Contact factory for availability.

Pin Configuration

Top View

8 Lead TO-99 Metal Can

8 Lead DIP

8 Lead Small Outline

***NOTE:** Pin 3 is N.C. (No Connection) on REF01, TEMP Output on REF02.

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com