

NT系列熔断器(Power fuses)

NT-熔断器



RoHS

特点:

符合IEC60269、DIN43620、GB13539等标准以及CE和RoHS环保指令;

额定电压: AC500V/690V 或 DC400V (制造等级00系列为DC250V)




额定电流: 2A-1600A

额定分断能力: AC120KA (制造等级00系列为AC50KA)

工作等级:

- ① gG/gL 全范围的线路保护
- ② aM 用于电动机保护
- ③ aR 用于半导体保护

安规认证: CE、CCC、TUV

产品图	等级	额定电流 (A)	额定电压 (V)	订货信息	重量/包装
	NT00C (RT16-00C)	2 4 6 10 16 20 25 32 35 40 50 63 80 100	AC500V 690V	 <p>NT□-□A□VAC□</p> <p>gG/gL aM aR</p> <p>电压 电流</p> <p>尺寸代号: 00C,00,0,1,2,3,4</p>	145g/Pcs 2Pcs/carton
	NT 00 (RT16-00)	2 4 6 10 16 20 25 32 35 40 50 63 80 100 125 160	OR DC250V		180g/Pcs (approx) 2Pcs/carton

114 深圳市威朗特电子有限公司

Victors Industrial Co.,Ltd.

Tel:755-83952751/33011766 510-82777399 Fax:755-82865705 510-85615399
Home Page:http://www.vicfuse.com E-mail:sales@vicfuse.com

NT-熔断器



特点:

符合IEC60269、DIN43620、GB13539等标准以及CE和RoHS环保指令;

额定电压: AC500V/690V 或 DC400V (制造等级00系列为DC250V)


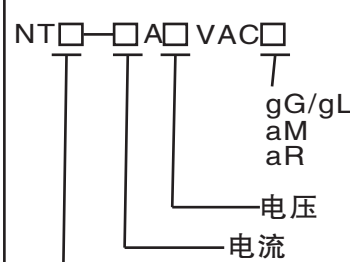

额定电流: 2A-1600A

额定分断能力: AC120KA (制造等级00系列为AC50KA)

工作等级:

- ① gG/gL 全范围的线路保护
- ② aM 用于电动机保护
- ③ aR 用于半导体保护

安规认证: CE、CCC、TUV

产品图	等级	额定电流 (A)	额定电压 (V)	订货信息	重量/包装
	NT 0	4 6 10 16 20 25 32 35 40 50 63 80 100 125 160	AC500V 690V OR DC440V	 尺寸代号: 00C,00,0,1,2,3,4	240g/Pcs 2Pcs/carton
	NT 1	63 80 100 125 160 200 224 250			450g/Pcs (approx) 2Pcs/carton

