
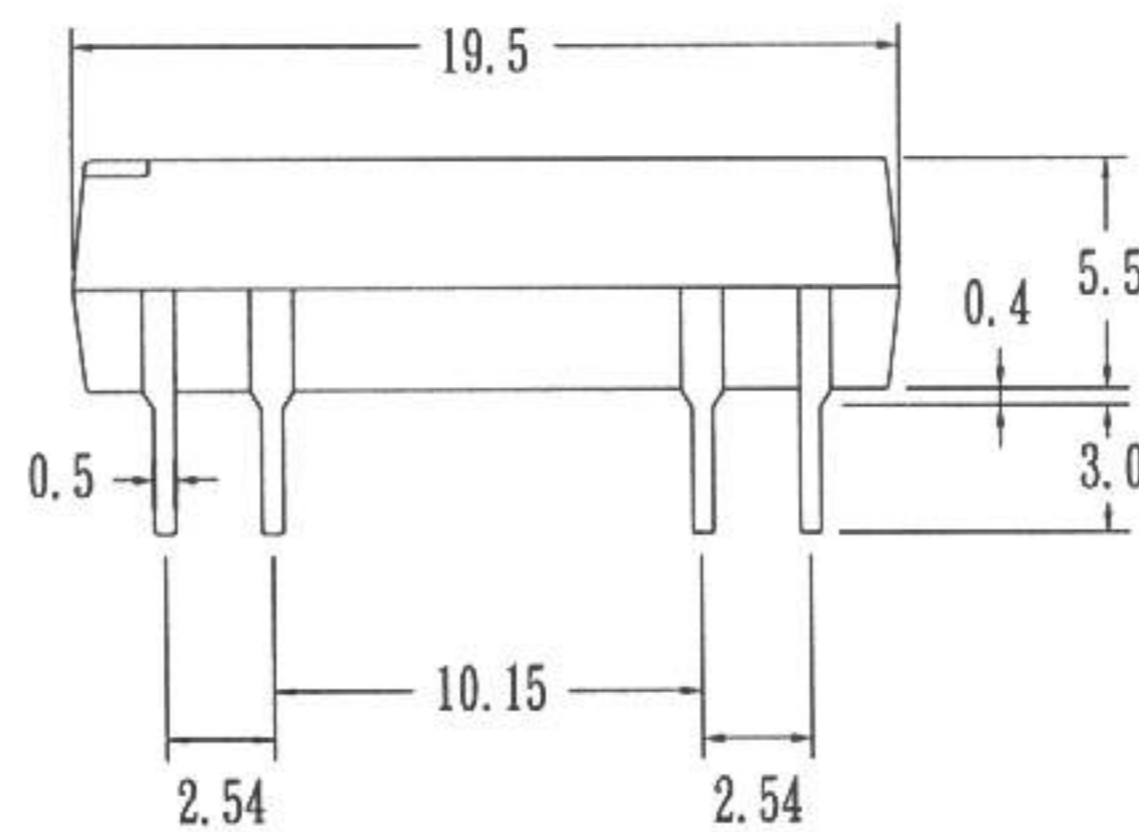


PRODUCT SPECIFICATION

DATE: 03/26/00'


COSMO ELECTRONICS CORPORATION	REED RELAY: D1A240000	NO. 50R01003	REV.
		SHEET 1 OF 2	2

1. OUTSIDE DIMENSION : UNIT (mm)

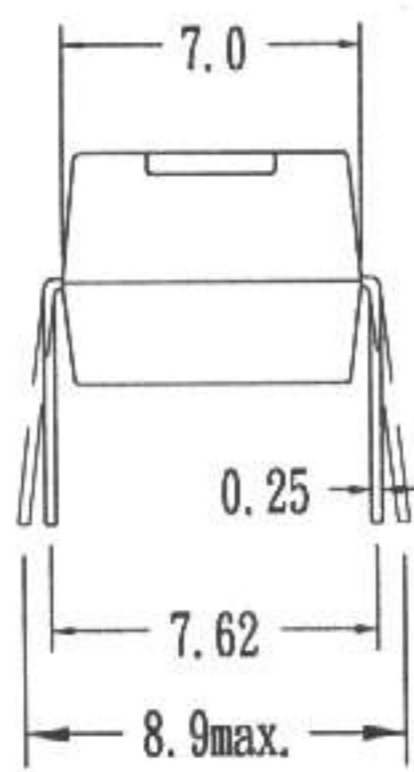

TOLERANCE : $\pm 0.1\text{mm}$

2. SCHEMATIC : TOP VIEW

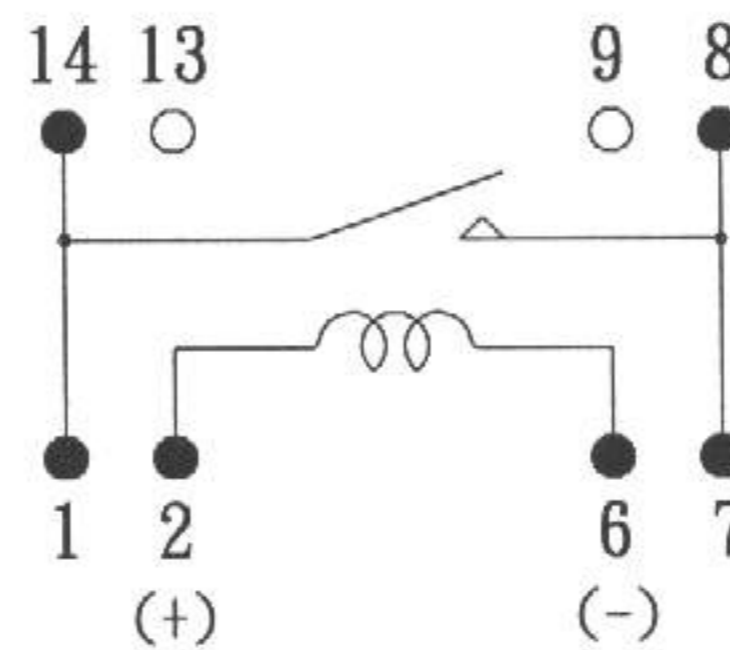

ISSUE

Dean. Yu.
03-28-00

CHECK

Alan Lui 03-29-00

APPROVED

Stan Hsu 4-1-00

PRODUCT SPECIFICATION

DATE: 03/26/00'

COSMO ELECTRONICS CORPORATION	REED RELAY: D1A240000	NO. 50R01003 SHEET 2 OF 2	REV. 2
---	---------------------------------	------------------------------	-----------

3.0 COIL RATINGS: (AT 20°C)

3.1 Coil resistance	2150	Ω	(±10%)
3.2 Nominal coil current	24	VDC	
3.3 Maximum Continuous voltage	28	VDC	
3.4 Must operate	18	VDC	
3.5 Must release	2.4	VDC	
3.6 Rated current	11.1	mA	

4.0 ELECTRONICAL CHARACTERISTICS:

4.1 Contact resistance	100	mΩ	(max)
4.2 Operate time	0.5	ms	(max)
4.3 Bounce time	0.5	ms	(max)
4.4 Release time	0.2	ms	(max)
4.5 Insulation resistance (100 VDC open contact)	10 ¹¹	Ω	(min)
4.6 Power	10	VA	(max)
4.7 Switching voltage	200	VDC	(max)
4.8 Switching current	0.5	A	(max)
4.9 Carry current	1.0	A	(max)
4.10 Breakdown voltage (across open contact)	250	VDC	(min)
(between coil & contact)	500	VDC	(min)
4.11 Life expectancy (signal level)	10 ⁸		
4.12 Operating temp	-40 to 85°C		
4.13 Storage temp	-50 to 125°C		
4.14 Resonant frequency	3.5	KHZ	
4.15 Vibration (10-2000HZ)	20	g	(max)
4.16 Minimum permissible load	100	mVDC	10uA

ISSUE <i>Dean. Yu.</i> <i>03-28-00</i>	CHECK <i>Alan Lee 03-29-00</i>	APPROVED <i>Stan Hu 4-1-00</i>
--	-----------------------------------	-----------------------------------