


PRODUCT SPECIFICATION

DATE: 03/26/00'


COSMO ELECTRONICS CORPORATION	REED RELAY: S1A050099	NO. 50R05013	REV.
		SHEET 1 OF 2	2

1. OUTSIDE DIMENSION : UNIT (mm)

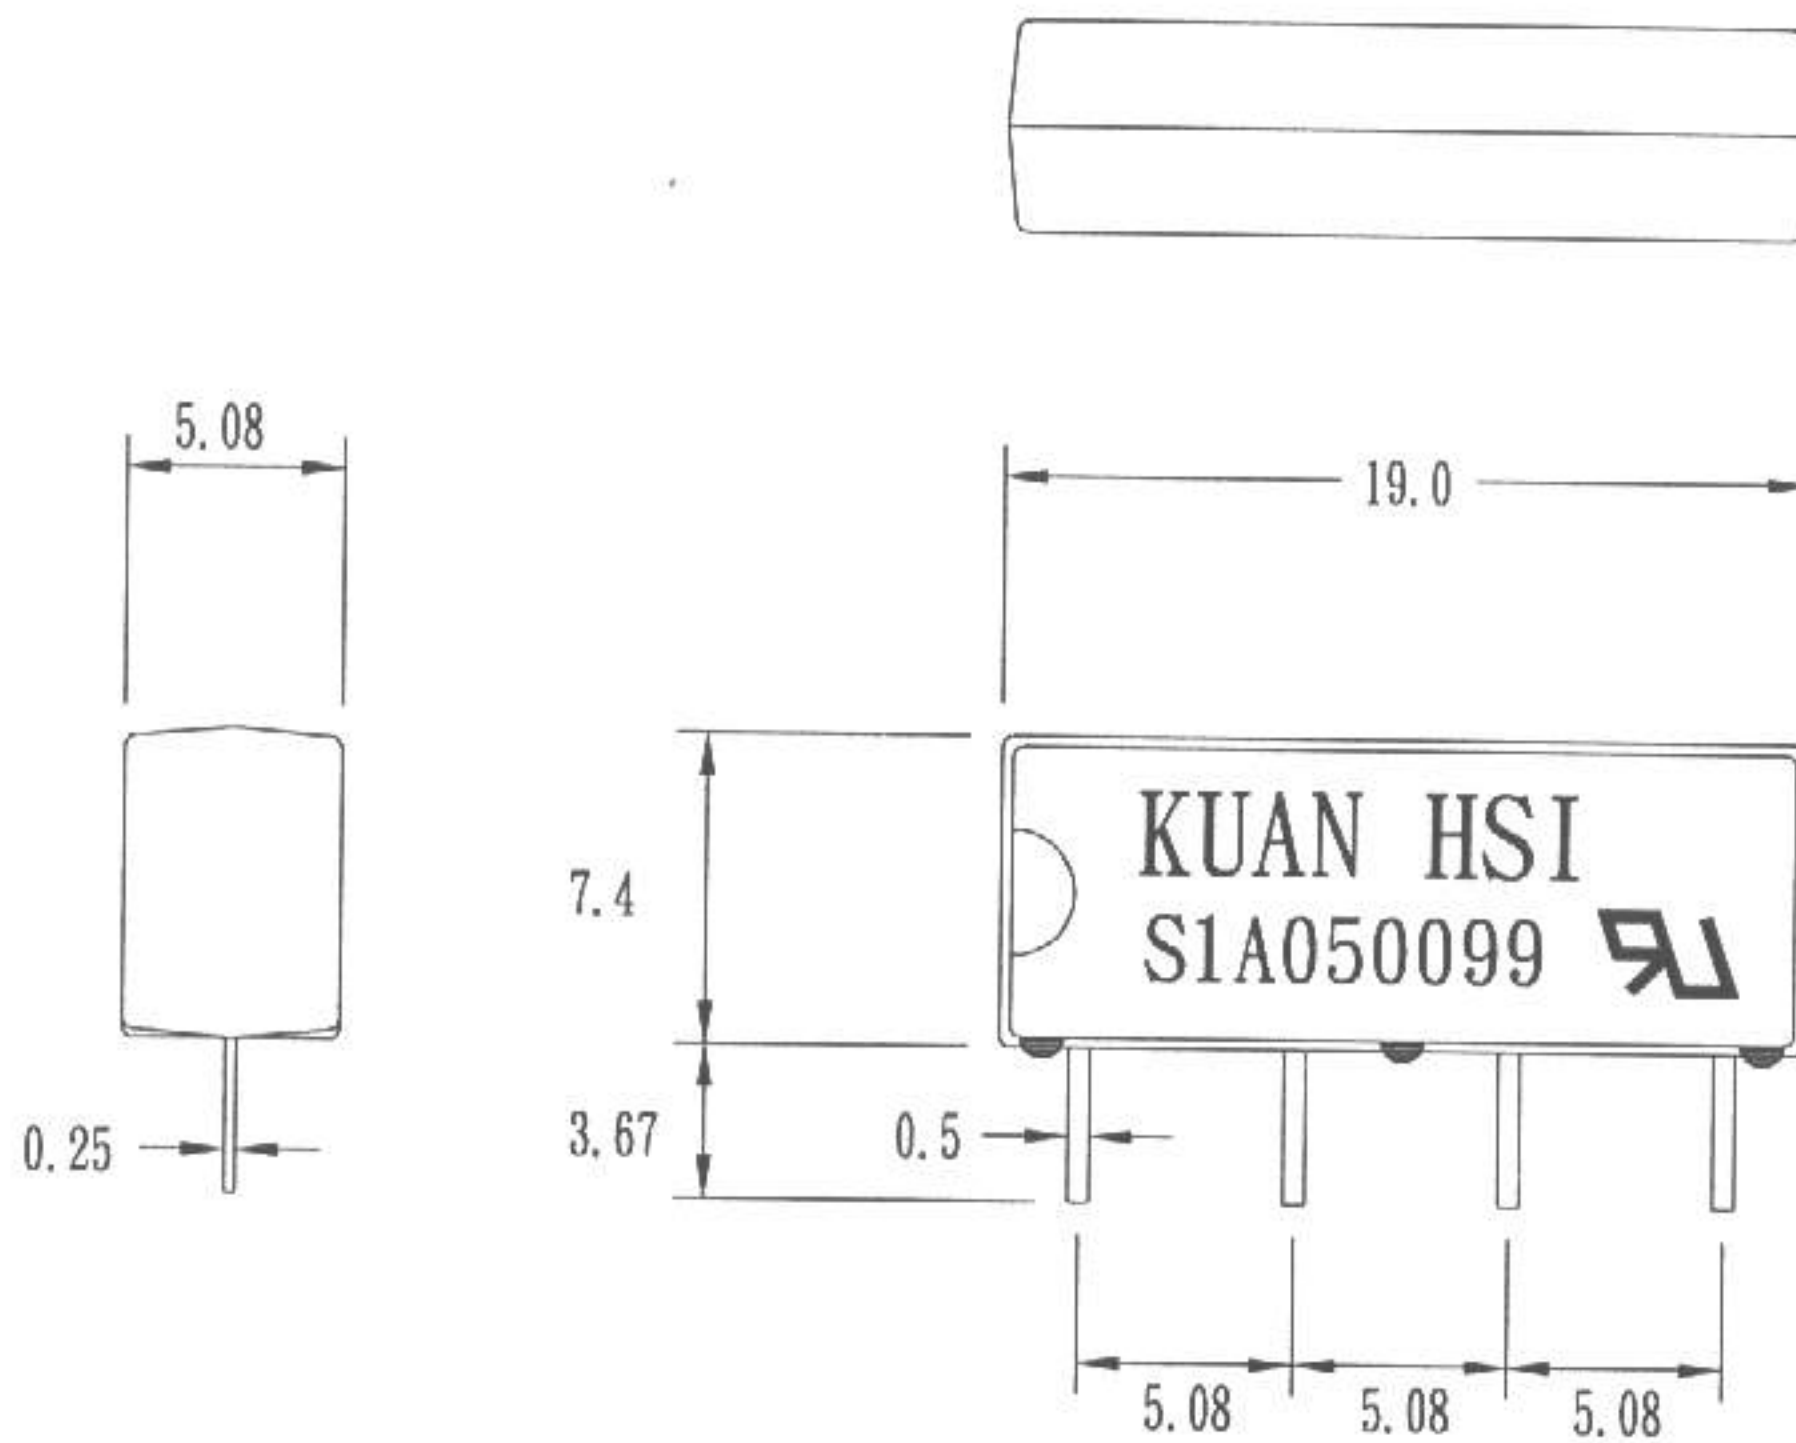

TOLERANCE : $\pm 0.1\text{mm}$

2. SCHEMATIC : TOP VIEW

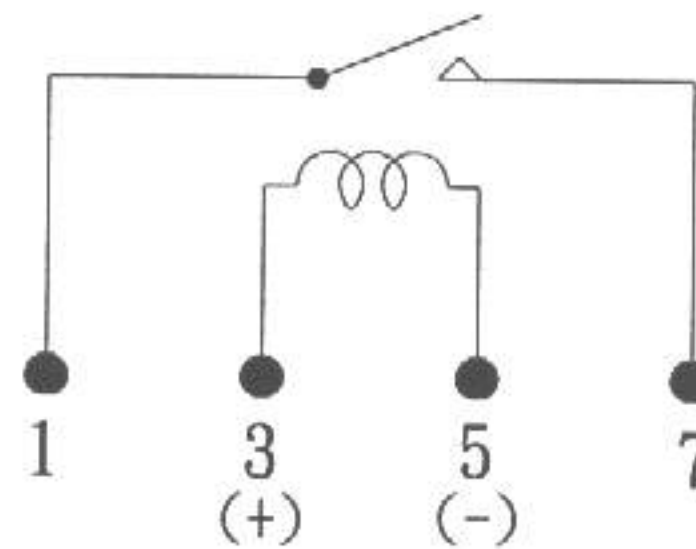

ISSUE <i>Dean. Yu 03-28-00</i>	CHECK <i>Allen Lai 03-29-00</i>	APPROVED <i>Stanley Wu 03-29-00</i>
-----------------------------------	------------------------------------	--

PRODUCT SPECIFICATION

DATE: 03/26/00'


COSMO ELECTRONICS CORPORATION	REED RELAY: S1A050099	NO. 50R05013 SHEET 2 OF 2	REV. 2
---	---------------------------------	------------------------------	-----------

3.0 COIL RATINGS: (AT 20°C)

3.1 Coil resistance	1000	Ω ($\pm 10\%$)
3.2 Nominal coil current	5	VDC
3.3 Maximum Continuous voltage	10	VDC
3.4 Must operate	3.75	VDC
3.5 Must release	1.0	VDC
3.6 Rated current	5	mA

4.0 ELECTRONICAL CHARACTERISTICS:

4.1 Contact resistance	100	m Ω (max)
4.2 Operate time	0.5	ms (max)
4.3 Bounce time	0.5	ms (max)
4.4 Release time	0.2	ms (max)
4.5 Insulation resistance (100 VDC open contact)	10^{11}	Ω (min)
4.6 Power	10	VA (max)
4.7 Switching voltage	200	VDC (max)
4.8 Switching current	0.5	A (max)
4.9 Carry current	1.0	A (max)
4.10 Breakdown voltage (across open contact)	250	VDC (min)
(between coil & contact)	1000	VDC (min)
4.11 Life expectancy (signal level)	10^8	
4.12 Operating temp	-40 to 85°C	
4.13 Storage temp	-40 to 125°C	
4.14 Resonant frequency	3.5	KHZ
4.15 Vibration (10-2000HZ)	20	g (max)
4.16 Minimum permissible load	100	mVDC 10uA

ISSUE <i>Dean Yu.</i> <i>03-28-00</i>	CHECK <i>Alan Lee 03-29-00</i>	APPROVED 
---	-----------------------------------	---