



SOT-89 Encapsulate Three Terminal Voltage Regulator

CJ78L05 Three-terminal positive voltage regulator


FEATURES

Maximum Output current

I_{OM} : 0.1 A

Output voltage

V_o : 5 V

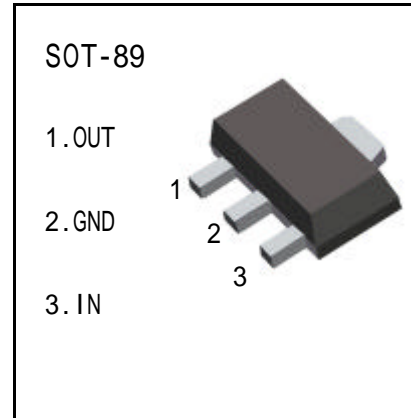

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Units
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	0—+125	
Storage Temperature Range	T_{STG}	-55—+150	

ELECTRICAL CHARACTERISTICS

($V_i=10V, I_o=40mA, 0 < T_j < 125$, $C_1=0.33 \mu F, C_o=0.1 \mu F$, unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25$	4.8	5.0	5.2	V
		$7V \ V_i \ 20V, I_o=1mA-40mA$	4.75	5.0	5.25	V
		$7V \ V_i \ V_{MAX}, I_o=1mA-70mA$	4.75	5.0	5.25	V (note)
Load Regulation	V_o	$T_j=25$, $I_o=1mA-100mA$		11	60	mV
		$T_j=25$, $I_o=1mA-40mA$		5.0	30	mV
Line regulation	V_o	$7V \ V_i \ 20V, T_j=25$		32	150	mV
		$8V \ V_i \ 20V, T_j=25$		26	100	mV
Quiescent Current	I_q	25		3.8	6	mA
Quiescent Current Change	I_q	$8V \ V_i \ 20V$			1.5	mA
		$1mA \ I_o \ 40mA$			0.1	mA
Output Noise Voltage	V_n	$10Hz \ f \ 100KHz$		42		μV
Ripple Rejection	RR	$8V \ V_i \ 18V, f=120Hz, T_j=25$	41	80		dB
Dropout Voltage	V_d	$T_j=25$		1.7		V

TYPICAL APPLICATION

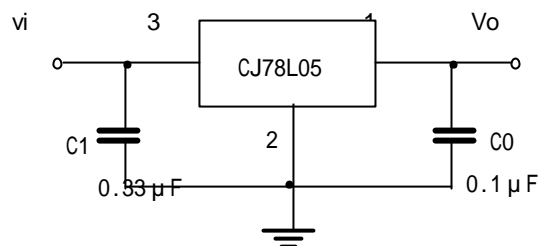

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

SOT-89-3L PACKAGE OUTLINE DIMENSIONS

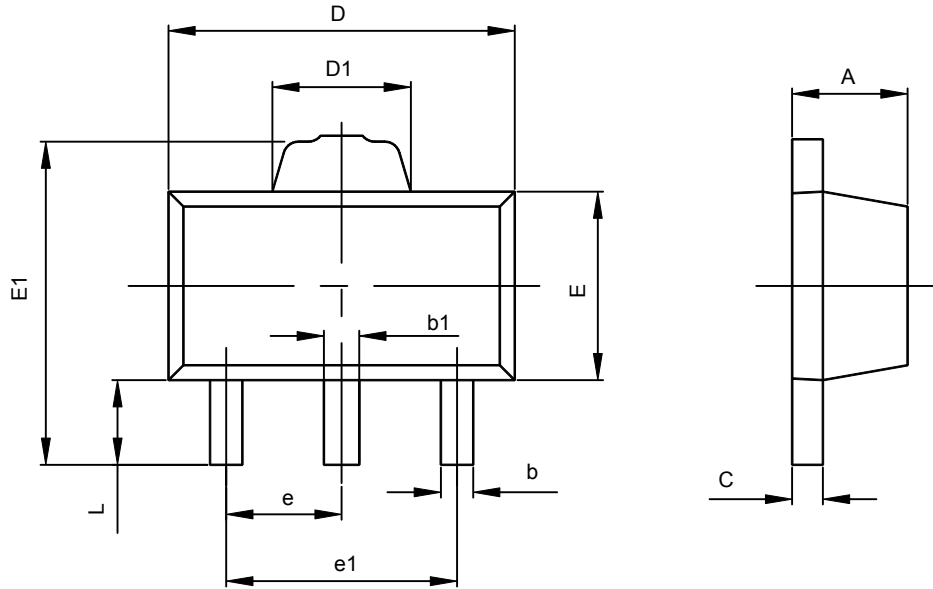

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn