




Industrial & Electrical Components

Miniature P.C.B Relay

Part No.

NRP-04



Ultra-small type with dimensions.
High sensitivity:200mW coil power
UL/C-UL recognized
Sealed type available

CONTACT

Arrangement	2A / 2C
Contact Material	Silver Alloy
Contact Resistive	50 mΩ
Rating	2A 120VAC/24VDC
Resistive load (cosφ=1)	1A 120VAC/24VDC
Inductive load (cosφ=0.75)	0.3A 120VAC/24VDC
Max. Switching Voltage	240VAC / 60VDC
Max. Switching Current	3A
Max. Switching Power	120VA / 60W
Expected life	
Mechanical	1×10 ⁷ Min
Electrical	1×10 ⁵ Min.

CHARACTERISTICS

Operate Time	8ms. Max.
Release Time	4ms. Max.
Initial breakdown voltage	
Between Coil & Contact	1000VAC (50/60Hz)for 1 min.
Between Open Contacts	750VAC (50/60Hz)for 1 min.
Insulation Resistance	Min.100MΩ (500 VDC)
Shock:	
Endurance	50G
Damage	100G
Vibration	
Endurance	10 to 55 Hz ,1.5mm D.A.
Damage	10 to 55 Hz ,1.5mm D.A.
Humidity	45%~85%RH
Ambient temperature	-25 to +70
Unit weight	≤5.5g

ORDERING INFORMATION

e.g

NRP - 04 - C - 12D - H

Series: Miniature p.c.b Relay

Part No.

Contact Form:

C=1C/O; A = N/O; B= N/C

Coil Voltage: 12D= 12Vdc

Nil= 0.36W coil power

H= 0.20W coil power


COIL DATA (at 20)

Nominal Voltage (VDC)	Pick-up Voltage VDC(Max)	Drop-out Voltage VDC(Min)	Coil Resistance (Ω) \pm 10%		Nominal operating Power (W)	Max.Allowable Voltage
			High Sensitive 0.20W	Standard 0.36W		
3	2.25	0.15	45	25	0.20 / 0.36	130% of nominal Voltage
5	3.75	0.25	125	70		
6	4.50	0.30	180	100		
9	6.75	0.45	405	225		
12	9.00	0.60	720	400		
24	18.00	1.20	2880	1600		
48	36.00	2.40	*4600	*4600		

* 48Vdc coil, power fixed at 0.50w

DIMENSIONS

Unit: mm

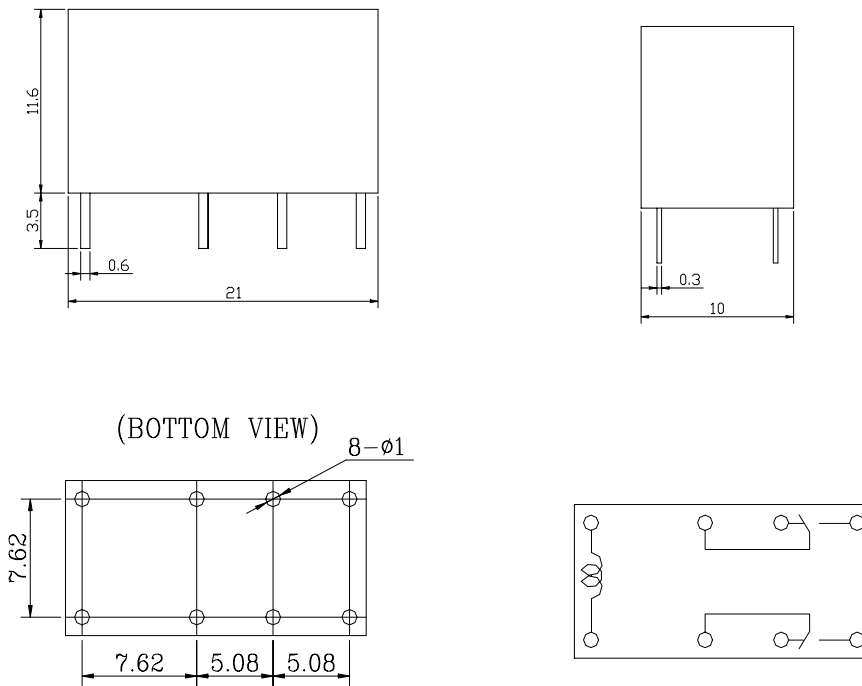

REFERENCE DATA

