

FEATURES

- Ranges 0...±25 and 0...±1000 sccm¹
- Bidirectional sensing
- Actual mass flow sensing
- Ceramic flow tube
- Manifold mount/o-ring sealed

SERVICE

To be used with dry gases only.
The AWM42150VH is a special sensor for hydrogen (H₂) flow.

The AWM series is NOT designed for liquid flow and will be damaged by liquid flow through the sensor.



SPECIFICATIONS

Maximum ratings


Supply voltage ²	8 to 15 V typ. 10 ±0.01 V
Power consumption	max. 60 mW
Temperature limits	
Operating	-40 to 125°C
Storage	-40 to 125°C
Mechanical shock	100 g (5 drops, 6 axes)

Note:

¹ sccm denotes standard cubic centimeters per minute

² Output voltage is ratiometric to supply voltage

ELECTRICAL CONNECTION

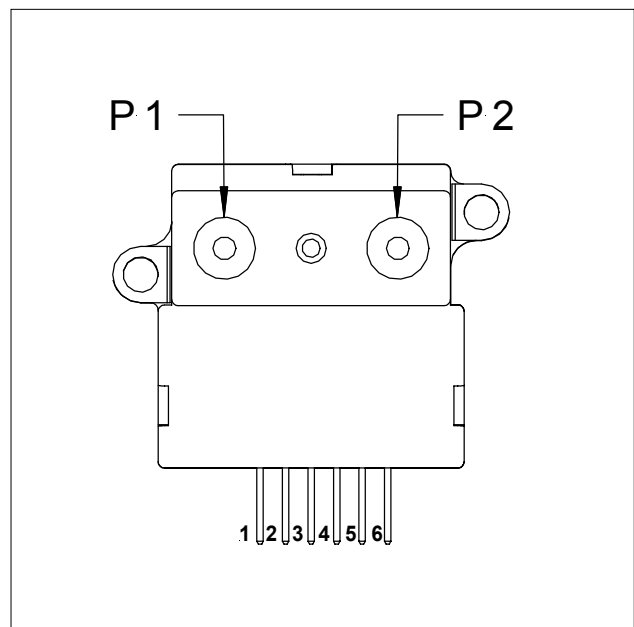

FLOW SENSOR CHARACTERISTICS³

$V_s = 10 \pm 0.01 \text{ V}$, $T_A = 25^\circ\text{C}$

Part no.	Flow range (full scale)	Max. flow change ⁴	Output voltage @ trim point
AWM42150VH	$\pm 25 \text{ sccm}$	5.0 l/sec	$8.5 \pm 1.5 \text{ mV @ } 25 \text{ sccm}$
AWM42300V	$\pm 1000 \text{ sccm}$	5.0 l/sec	$54.7 \pm 3.7 \text{ mV @ } 1000 \text{ sccm}$

PERFORMANCE CHARACTERISTICS

$V_s = 10 \pm 0.01 \text{ V}$, $T_A = 25^\circ\text{C}$

Characteristics			Min.	Typ.	Max.	Unit
Zero offset	AWM42150VH		-1.0	0	1.0	mV
	AWM42300V		-1.5	0	1.5	
Repeatability and hysteresis (combined)	AWM42150VH				± 0.35	% reading
	AWM42300V				± 0.50	
Temperature effects ⁵	Offset	-25 to 85 °C		± 0.20		mV
		Span	-25 to 25 °C		2.5	
	25 to 85 °C			-2.5		
Response time				1.0	3.0	ms
Common mode pressure					150	psi

Notes:

³ A 5 micron filter is recommended for all devices.

⁴ Maximum allowable rate of flow change to prevent damage.



⁵ Shift is relative to 25 °C.

OUTPUT FLOW VS INTERCHANGEABILITY


$V_s = 10 \pm 0.01 \text{ V}$, $T_A = 25^\circ\text{C}$

AWM42150VH				AWM42300V			
Press μBar	Flow sccm	Nom. mV	Tol. $\pm \text{mV}$	Press. mBar	Flow sccm	Nom. mV	Tol. $\pm \text{mV}$
20	30	9.9	1.5	2.23	1000	54.7	2.00
17	25	8.5	1.5	1.52	800	53.0	2.0
14	20	6.8	1.5	0.94	600	49.3	2.5
10	15	5.2	1.0	0.49	400	42.5	3.5
7	10	3.5	1.0	0.19	200	29.8	4.0
3	5	1.7	1.0	0.00	0	0.0	1.5
0	0	0.0	1.0	-0.19	-200	-29.8	4.0
				-0.49	-400	-42.5	5.0
				-0.94	-600	-49.3	6.0
				-1.52	-800	-53.0	6.0
				-2.23	-1000	-55.2	6.0


OUTPUT CURVES

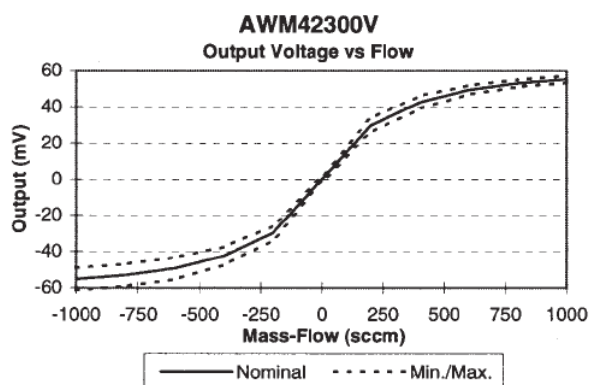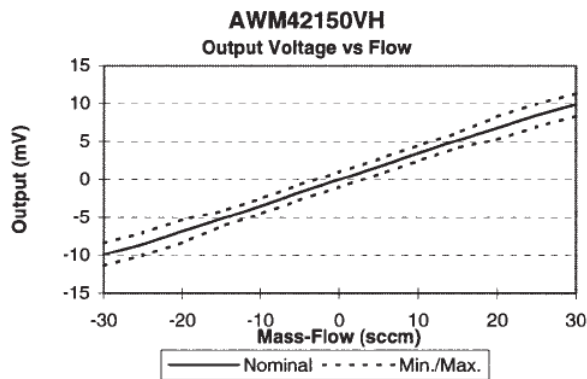

HEATER CONTROL CIRCUIT

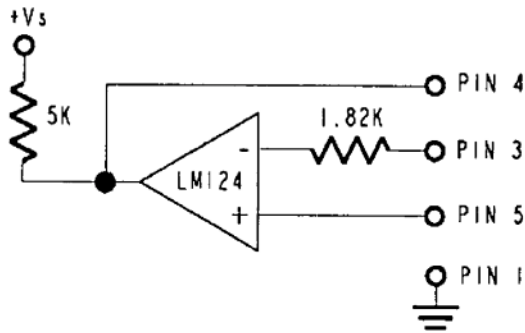


SENSING BRIDGE SUPPLY CIRCUIT

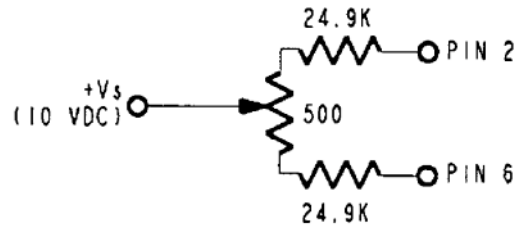

Note:

Circuits required for operation per specifications. Circuits are not on board the sensor.


DIFFERENTIAL INSTRUMENTATION AMPLIFIER CIRCUIT (OPTIONAL)

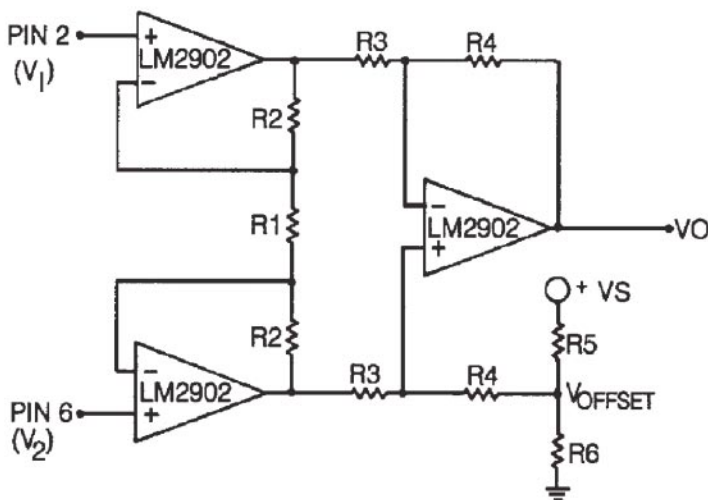

$$V_O = \left(\frac{2R_2 + R_1}{R_1} \right) \left(\frac{R_4}{R_3} \right) (V_2 - V_1) + V_{Offset}$$

where $V_{Offset} = V_S \left(\frac{R_6}{R_6 + R_5} \right)$

OUTLINE DRAWING

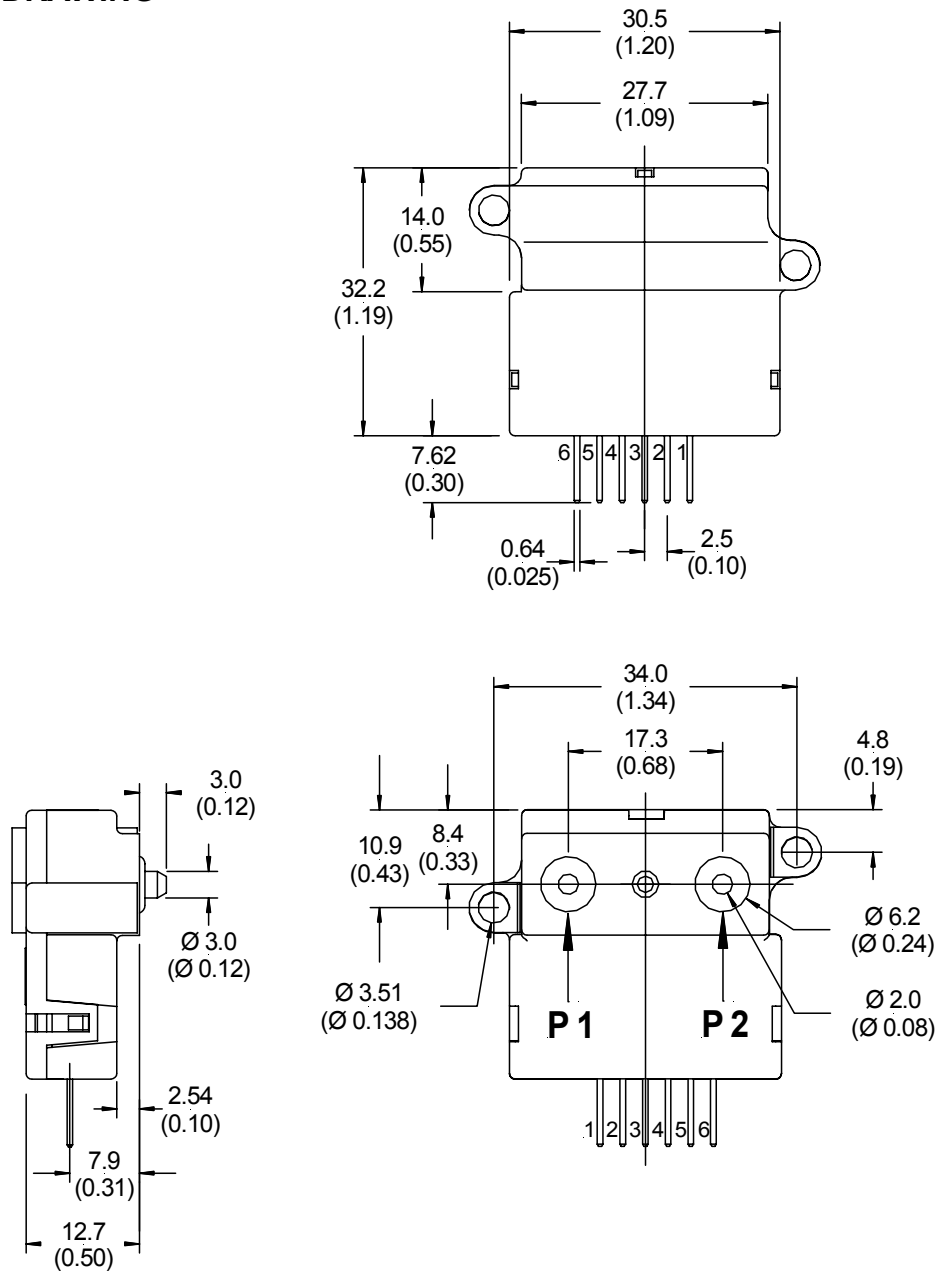

mass: approx. 14 g

dimensions in mm (inches)

GAS CORRECTION FACTORS⁶

Gas type	Correction factor (approx.)
Helium (He)	0.5 ⁷
Hydrogen (H ₂)	0.7 ^{7,8}
Argon (Ar)	0.95
Nitrogen (N ₂)	1.0
Oxygen (O ₂)	1.0
Air	1.0
Nitric oxide (NO)	1.0
Carbon monoxide (CO)	1.0
Methane (CH ₄)	1.1
Ammonia (NH ₃)	1.1
Nitrous oxide (N ₂ O)	1.35
Nitrogen dioxide (NO ₂)	1.35
Carbon dioxide (CO ₂)	1.35

Notes:

- ⁶ Gas correction factors are referenced to nitrogen (N₂) as calibration gas type. Approximate gas correction factors are provided as guidelines only. Individual gas types may perform differently at temperature extremes and varying flow rates.
- ⁷ When sensing Hydrogen (H₂) or Helium (He) it may be necessary to power the mass flow sensor using increased supply voltage: Hydrogen typ. 12 V, Helium typ. 15 V
- ⁸ Hydrogen (H₂) flow measurement requires the use of a special sensor. These devices provide normal operation when sensing hydrogen flow and are designated with an "H" at the end of the order number.

ORDERING INFORMATION

Flow range	Dry gas	Hydrogen gas ⁸
±25 sccm	---	AWM42150VH
±1000 sccm	AWM42300V	---

Sensortech reserves the right to make changes to any products herein. Sensortech does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn