

SONGLE RELAY



RELAY ISO9002

SMI-2P



1. MAIN FEATURES

- Slim type and small occupying space can offer high density P.C.B. technique.
- Low coil power consumption type and general coil power consumption are prepared to comply with user's wide selections.
- Employment of suitable plastic materials to be applied to high temperature and various chemical solutions.
- Complete protective construction from dust and soldering flux. If required,

2. APPLICATIONS

- Cooking appliances, air conditioners, audio equipment, domestic appliances, etc.


3. ORDERING INFORMATION

SMI-2P	XX VDC	S	L	C
Model of relay	Nominal coil voltage	Structure	Coil sensitivity	Contact form
SMI-2P	05, 06, 09, 12, 24, 48VDC	S: Sealed type	L: 0.54W	2A: 2 form A
		F: Flux free type	D: 0.72W	2B: 2 form B


4. RATING

CCC	FILE NUMBER: CH0036746-99	5A/250VDC
UL	FILE NUMBER: E167996	5A/240VAC 30VDC
TUV	FILE NUMBER: R9933789	5A/240VAC 30VDC


5. DIMENSION (unit:mm)

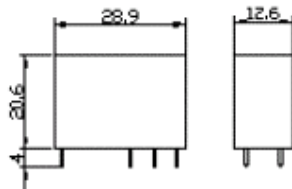

DRILLING (unit:mm)



WIRING DIAGRAM



6. COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) $\pm 10\%$	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
SMI-2P0.72W	03	03	240	12.5	abt. 0.72W	80%Max.	5% Min.	130% Max.
	05	05	138.9	36				
	06	06	120	50				
	09	09	78.3	115				
	12	12	60	200				
	24	24	29.3	820				
SMI-2P0.54W	03	03	126.5	17	abt. 0.54W	80%Max.	5% Min.	130% Max.
	05	05	106.4	47				
	06	06	88	68				
	09	09	58	155				
	12	12	44.4	270				
	24	24	21.8	1100				
	48	48	10.9	4400				


7. CONTACT RATING

Item	Arrangement	SMI-2P	
		Resistive Load (cos ϕ :=1)	Inductive Load (cos ϕ :=0.4)
Rated load		5A 250VAC 5A 30VDC	2A 250VAC 2A 30VDC
Carrying current		5A	
Max. switching voltage		190VAC, 65VDC	
Min. permissible load		5VDC 10Ma	
Contact material		AgCdO	


8. PERFORMANCE (at initial value)

Item	Type	SMI-2P
Contact Resistance		100m Ω Max.
Operation Time		15msec Max.
Release Time		8msec Max.
Dielectric Strength		5000VAC 50/60HZ (1 minute) 1000VAC 50/60HZ (1 minute)
Surge Resistiveness		1000V (between coil & contact 1 \times 40 msec)
Insulation Resistance		100 M Ω Min. (500VDC)
Max. ON/OFF Switching		300 operation/min 30 operation/min
Operating Ambient Temperature		-20°C to +55°C
Operating Humidity		45 to 80% RH
Coil Temperature Rise		45 deg. Max. (at rated coil voltage)
Vibration		10 to 55Hz Double Amplitude 1.5mm 10 to 55Hz Double Amplitude 1.5mm
Shock		100G Min. 10G Min.
Life Expectancy		10 ⁷ operations. Min. 10 ⁵ operations. Min.


9. USEFUL CURVES

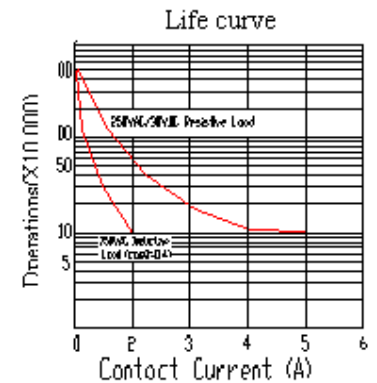

Contact Switching Capacity



Temperature Rise

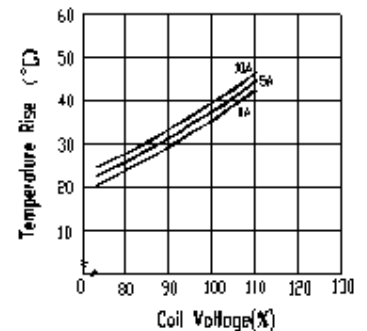

Weight	abt. 13grs.
--------	-------------