

Part Number:  
HR228413

**Electrical Specification @25°C**

Isolation: 1250Vrms (PIN1-2 to PIN4-3)

Turns Ratio: (PIN1-2) : (PIN4-3) = 1:1 ±3%

PIN1-2 DC Resistance: 160 ±10% ohms

PIN4-3 DC Resistance: 140 ±10% ohms

Insertion Loss: 3.60 dB Max @1KHz 1Vrms


Frequency Response: ±0.25dB Maximum @300Hz ~ 3.5KHz (Ref. 1KHz)

Return Loss: (Ref. 600 ohms)


22dB Min @300Hz / 25dB Min @1.0KHz / 28dB Min @3.5KHz

Polarity: PIN1 & 4 in phase

**Schematics**

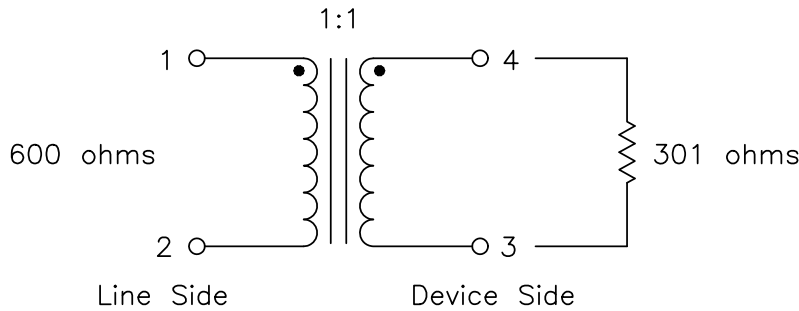

**Mechanical Dimensions**

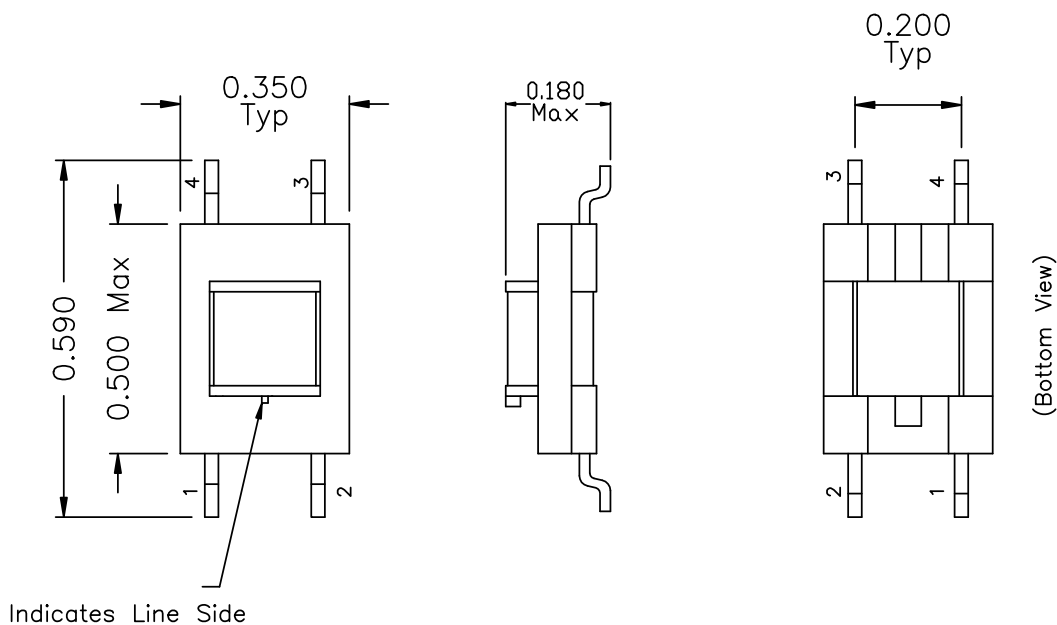

Part No.: HR228413	Unless otherwise specified, Tol.: .xxx ±0.010 Dimensions in inches	Rev: D/1	DRWN:	Date:
DOC.No.: SP-228413		Page 1/1	APPD:	Date:
Tel: (0760) 2121067 2121679 • Fax: (0760) 2121065 • E-Mail: hanrun@pub.zhongshan.gd.cn • http: www.hanrun.com				