

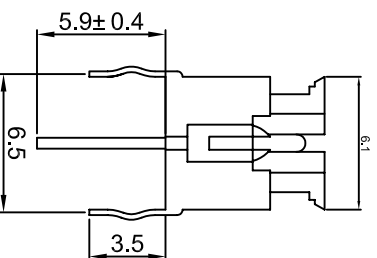
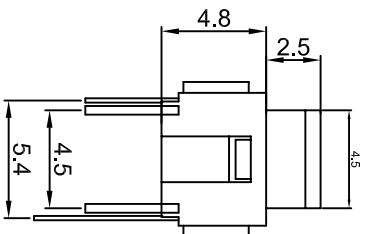




TS2




MATERIAL:
Frame:Nylon66, UL rated:94V-2 min
Cap:ABS
Terminal:Brass,silver or tin plated


Specifications

- Circuit :SPST
- Current rating :50mA
- Voltage rating :12VDC
- Dielectric withstanding voltage :250VAC for 1 minute
- Contact resistance :100m Ω Max.(initial)
- Insulation resistance :100M Ω Min
- Operating force :250± 50gf
- Total travel :0.25mm± 0.1mm
- Operating life :100,000 CYCLES Min
- Solder specifications :256 ° C for 5 seconds
- Function :Momentary
- Operating temperature :+10 ° C ~ +60 ° C

P.C.B.LAYOUT



CIRCUIT



Chip	Vf(V)
Emitted	If=20mA
color	MIN
Red	1.8
Yellow	1.8
Green	3.0
Blue	3.0
	MAX
	2.4
	2.4
	3.6
	3.6

修正	REVISION	说明	DESCRIPTION	核准	APPROVAL BY	公差	TOLERANCES	设计	DESIGNED BY	角度	ANGLE	1°	单位	品名	TITLE	DIMENSION UNIT	图号	DRAWING NO	材质	MATERIAL	处理	FINISH
				绘图	Gokey Guo			设计	Gokey Guo	比例尺	NONE		品名	TS2-00-00R		图号		材质		处理		
				核对	Xinchao Le			核准	Xinchao Le	日期	2008.05.08											