
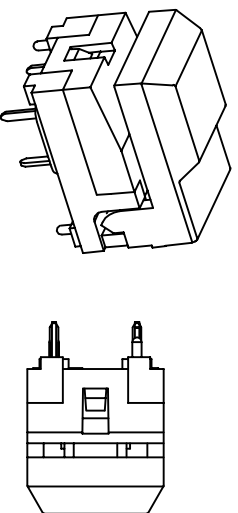


东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-86

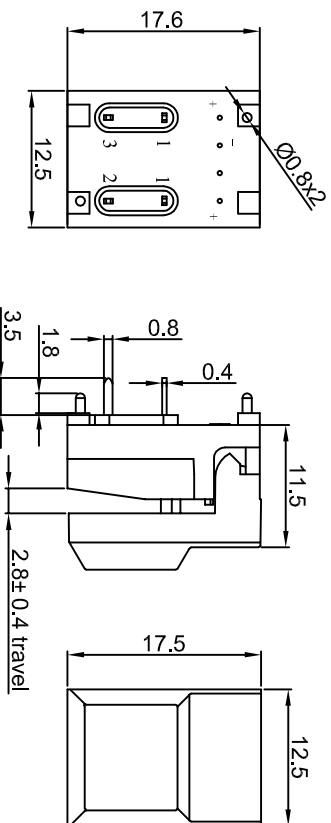

MATERIAL
 Base:Nylon66 UL rated: 94V-2 min
 Cap: ABS
 Terminal: Phosphor bronze, golden plated

GENERAL SPECIFICATIONS
CIRCUIT :SPST
CURRENT RATING :12mA
VOLTAGE RATING :24VDC
CONTACT RESISTANCE :50m Ω Max.(initial)
INSULATION RESISTANCE :100M Ω Min
OPERATING FORCE :170gf± 50g
TOTAL TRAVEL :2.8mm± 0.4mm
OPERATING LIFE :50,000 CYCLES Min
SOLDER SPECIFICATIONS :256 ° C for 3 seconds
FUNCTION :Momentary
OPERATING TEMPERATURE :+10 ° C ~ +60 ° C

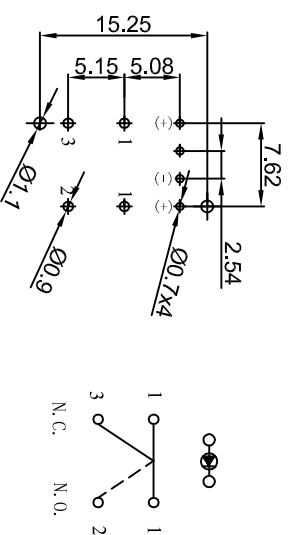

P.C.B CUT OUT Circuit Diagram

Chip	Vf(V)	
	MIN	MAX
Emitted color	If=20mA	
Red	1.8	2.4
Yellow	1.8	2.4
Green	3.0	3.6
Blue	3.0	3.6

修正 REVISION	说明 DESCRIPTION	核准 APPROVAL BY	公差 TOLERANCES	设计 DESIGNED BY	角度 ANGLE 1°	单位 TITLE	DIMENSION UNIT
			. X±0.3	李叔	. XX±0.15	PB-86-A0-Y-NN	mm.
			绘图 DRAWN BY	李叔	比例尺 SCALE	品名 TITLE	
			核对 CHECKED BY	李新捷	日期 DATE	DRAWING NO	
				李新捷	2006 08 26	材质 MATERIAL	
						处理 FINISH	