

GENERAL TECHNICAL CHARACTERISTICS

Dielectric : Polypropylene film
 Construction : Extended double side metallized carrier film
 with internal series connection and metallized film
 Case : Polyester tape wrapping; UL94V-0 resin end fill
 Leads : Tinned copper wire




ELECTRICAL CHARACTERISTICS

Working temperature : - 40 to + 85 °C
 Capacitance : 0.0068 to 8.5µF
 Rated Voltage : 700 to 3000 Vdc
 Tolerance : ± 5%, ± 10%
 Dissipation factor: Measured at 1000±20 Hz and 25±5°C.
 When Cr≤1.0µF, 4×10⁻⁴;
 When Cr>1.0µF, 6×10⁻⁴

TEST METHODS AND PERFORMANCES

Dielectric strength: 2Ur (DC) applied for 10s at 25±5°C (1 minute for type test)
 Insulation resistance : 3000s but need not exceed 30GΩ (typical value), after 1 minute of electrification at 100Vdc (25±5°C)

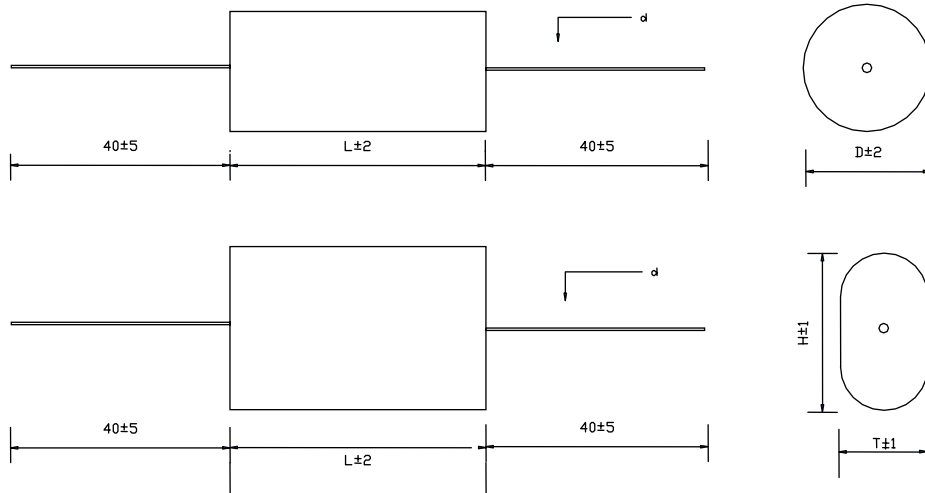

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)					du/dt (v/µs)	Ipeak A	Irms max. (A)	ESR (mΩ)
		L	D	flat, oval		d				
				T	H					
Ur 700Vdc, Urms 380Vac, Upk 1000Vdc										
STD-700-0.22	0.22	32		7.9	14.3	0.8	480	106	5.5	6.5
STD-700-0.33	0.33	32	14.2	9.5	17.5	0.8	480	158	6	6.0
STD-700-0.47	0.47	32	16.6	11.9	19.9	0.8	480	226	8	4.7
STD-700-0.68	0.68	32	19.7	14.9	22.9	1.0	480	326	9	3.9
STD-700-0.68	0.68	44	15.6	10.9	18.9	1.0	325	221	9	4.4
STD-700-1.0	1.0	44	18.7	13.9	21.9	1.2	325	325	9	3.9
STD-700-1.5	1.5	44	22.6	16.3	27.5	1.2	325	488	12	3.3
STD-700-2.0	2.0	44	25.9	19.5	30.7	1.2	325	650	12	3.0
STD-700-2.2	2.2	44	27.1	20.7	31.9	1.2	325	715	12	2.9
STD-700-2.2	2.2	57	22.6	16.3	27.5	1.2	240	528	12	3.8
STD-700-2.5	2.5	44	28.8	22.4	33.6	1.2	325	813	12	3.5
STD-700-2.5	2.5	57	24.0	17.7	28.9	1.2	240	600	12	3.8
STD-700-3.0	3.0	44	31.4	25.0	36.2	1.2	325	975	12	3.1
STD-700-3.0	3.0	57	26.2	19.8	31.0	1.2	240	720	12	3.3
STD-700-3.3	3.3	44	32.9	26.4	37.6	1.2	325	1073	12	2.9
STD-700-3.5	3.5	57	28.2	21.8	33.0	1.2	240	840	12	2.7

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)					du/dt (v/µs)	Ipeak A	Irms max. (A)	ESR (mΩ)
		flat,oval								
		L	D	T	H	d				
STD-700-4.0	4.0	57	30.0	23.6	34.8	1.2	240	960	12	2.6
STD-700-4.7	4.7	57	32.5	26.0	37.2	1.2	240	1128	12	2.5
STD-700-5.6	5.6	57	35.4	28.8	40.0	1.2	240	1344	12	2.3
STD-700-6.8	6.8	57	38.9			1.2	240	1632	12	2.0
STD-700-8.5	8.5	57	43.3			1.2	240	2040	12	1.6
Ur 850Vdc, Urms 450Vac, Upk 1200Vdc										
STD-850-0.10	0.10	32		5.9	12.3	0.8	700	70	4	11.5
STD-850-0.15	0.15	32		7.6	14.0	0.8	700	105	5.5	8.6
STD-850-0.22	0.22	32	13.7	9.1	17.1	0.8	700	154	6.5	6.5
STD-850-0.22	0.22	44	11.1	7.1	13.5	0.8	400	88	6.5	7.9
STD-850-0.33	0.33	32	16.4	11.7	19.7	1.0	700	231	8	4.8
STD-850-0.33	0.33	44	13.2	8.5	16.5	1.0	400	132	7.5	6.1
STD-850-0.47	0.47	32	19.3	14.6	22.6	1.0	700	329	9	4.0
STD-850-0.47	0.47	44	15.4	10.7	18.7	1.0	400	188	9	5.0
STD-850-0.68	0.68	44	18.2	13.5	21.5	1.0	400	272	9	3.2
STD-850-1.0	1.0	44	21.8	15.6	26.8	1.2	400	400	12	3.3
STD-850-1.5	1.5	44	26.4	20.1	31.3	1.2	400	600	12	2.8
STD-850-2.0	2.0	44	30.4	23.9	35.1	1.2	400	800	12	3.0
STD-850-2.2	2.2	44	31.8	25.3	36.5	1.2	400	880	12	2.3
STD-850-2.2	2.2	57	26.5	20.1	31.3	1.2	290	638	12	2.8
STD-850-2.5	2.5	44	33.8	27.3	38.5	1.2	400	1000	12	2.6
STD-850-2.5	2.5	57	28.1	21.7	32.9	1.2	290	725	12	2.8
STD-850-3.0	3.0	57	30.7	24.3	35.5	1.2	290	870	12	2.6
STD-850-3.3	3.3	57	32.2	25.7	36.9	1.2	290	957	12	2.4
STD-850-4.0	4.0	57	35.3	28.8	40.0	1.2	290	1160	12	2.3
STD-850-4.7	4.7	57	38.2			1.2	290	1363	12	2.0
STD-850-5.6	5.6	57	41.6			1.2	290	1624	12	1.7
Ur 1000Vdc, Urms 480Vac, Upk 1400Vdc										
STD-1000-0.10	0.10	32		7.7	12.5	0.8	850	85	5	8.5
STD-1000-0.15	0.15	32		9.1	15.5	0.8	850	128	6	8.2
STD-1000-0.22	0.22	32	15.6	10.9	18.9	1.0	850	187	7	5.9
STD-1000-0.33	0.33	32	18.7	14.0	22.0	1.0	850	281	9	4.5
STD-1000-0.33	0.33	44	14.9	10.2	18.2	1.0	570	188	9	5.8
STD-1000-0.47	0.47	32	22.1	15.9	27.1	1.0	850	400	9	3.8
STD-1000-0.47	0.47	44	17.5	12.8	20.8	1.0	570	268	9	4.7
STD-1000-0.68	0.68	44	20.8	14.6	25.8	1.0	570	388	9	4.0
STD-1000-1.0	1.0	44	25.0	18.6	29.8	1.2	570	570	12	3.2
STD-1000-1.5	1.5	44	30.3	23.9	35.1	1.2	570	855	12	3.6
STD-1000-1.5	1.5	57	25.2	18.9	30.1	1.2	340	510	12	3.9
STD-1000-2.0	2.0	57	29.0	22.6	33.8	1.2	340	680	12	3.0
STD-1000-2.2	2.2	57	30.3	23.9	35.1	1.2	340	748	12	2.7
STD-1000-3.0	3.0	57	35.3	28.7	39.9	1.2	340	1020	12	2.4
STD-1000-3.3	3.3	57	36.9	32.9	39.3	1.2	340	1122	12	2.1
STD-1000-4.0	4.0	57	40.6			1.2	340	1360	12	1.8
STD-1000-4.7	4.7	57	43.9			1.2	340	1598	12	1.6
Ur 1200Vdc, Urms 500Vac, Upk 1600Vdc										
STD-1200-0.047	0.047	32		5.5	10.3	0.8	1100	52	3	19.4
STD-1200-0.068	0.068	32		6.9	11.7	0.8	1100	75	3.5	12.0
STD-1200-0.10	0.10	32		8.7	13.5	0.8	1100	110	5	10.7
STD-1200-0.10	0.10	37	10.7	6.7	13.1	0.8	840	84	5	11.8
STD-1200-0.10	0.10	44	9.8	5.8	12.2	0.8	650	65	5	13.1
STD-1200-0.15	0.15	32	14.3	9.6	17.6	1.0	1100	165	6	7.7
STD-1200-0.15	0.15	37	12.7	8.1	16.1	1.0	840	126	6	8.7
STD-1200-0.15	0.15	44	11.5	7.5	13.9	1.0	650	98	6	10.0
STD-1200-0.22	0.22	32	17.0	12.3	20.3	1.0	1100	242	9	5.4
STD-1200-0.22	0.22	37	15.0	10.3	18.3	1.0	840	185	9	6.0
STD-1200-0.22	0.22	44	13.6	8.9	16.9	1.0	650	143	9	7.6

Electrical specifications, ordering codes


Part Number	Cap (µF)	Dimension (mm)					du/dt (v/µs)	Ipeak A	Irms max. (A)	ESR (mΩ)
		flat, oval								
		L	D	T	H	d				
STD-1200-0.33	0.33	32	20.5	15.7	23.7	1.0	1100	363	9	4.5
STD-1200-0.33	0.33	37	18.1	13.3	21.3	1.0	840	277	9	4.8
STD-1200-0.33	0.33	44	16.3	11.6	19.6	1.0	650	215	9	5.4
STD-1200-0.47	0.47	37	21.3	15.1	26.3	1.0	840	395	9	4.0
STD-1200-0.47	0.47	44	22.8	13.0	24.2	1.0	650	306	9	4.8
STD-1200-0.68	0.68	37	25.4	19.0	30.2	1.2	840	571	12	2.9
STD-1200-0.68	0.68	44	22.8	16.5	27.7	1.2	650	442	12	3.9
STD-1200-1.0	1.0	44	27.4	21.0	32.2	1.2	650	650	12	3.4
STD-1200-1.0	1.0	57	22.8	16.5	27.7	1.2	385	385	12	3.8
STD-1200-1.2	1.2	44	29.9	23.4	34.6	1.2	650	780	12	3.0
STD-1200-1.2	1.2	57	24.9	18.5	29.7	1.2	385	462	12	3.4
STD-1200-1.5	1.5	44	33.3	26.8	38.0	1.2	650	975	12	2.7
STD-1200-1.5	1.5	57	27.7	21.3	32.5	1.2	385	578	12	3.0
STD-1200-2.0	2.0	57	31.8	25.3	36.5	1.2	385	770	12	2.6
STD-1200-2.2	2.2	57	33.3	26.8	38.0	1.2	385	847	12	2.5
STD-1200-2.5	2.5	57	35.4	28.9	40.1	1.2	385	963	12	2.3
STD-1200-3.0	3.0	57	38.7			1.2	385	1155	12	2.0
STD-1200-3.3	3.3	57	40.6			1.2	385	1270	12	1.7
STD-1200-4.0	4.0	57	44.6			1.2	385	1540	12	1.5
Ur 1500Vdc, Urms 575Vac, Upk 2000Vdc										
STD-1500-0.068	0.068	32		8.5	14.9	0.8	1225	83	4	13.8
STD-1500-0.10	0.10	32	14.7	10.0	18.0	0.8	1225	123	5.5	9.6
STD-1500-0.15	0.15	32	17.7	13.0	21.0	1.0	1225	184	7	7.2
STD-1500-0.22	0.22	32	21.1	14.9	26.1	1.0	1225	270	9	5.3
STD-1500-0.22	0.22	44	16.8	12.1	20.1	1.0	800	176	9	7.0
STD-1500-0.33	0.33	44	20.2	15.5	23.5	1.0	800	264	9	5.3
STD-1500-0.47	0.47	44	23.9	17.6	28.8	1.2	800	376	11	4.3
STD-1500-0.68	0.68	44	28.5	22.1	33.3	1.2	800	544	12	3.7
STD-1500-1.0	1.0	44	34.4	27.9	39.1	1.2	800	800	12	3.2
STD-1500-1.0	1.0	57	28.6	22.2	33.4	1.2	570	570	12	3.7
STD-1500-1.2	1.2	57	31.2	24.8	36.0	1.2	570	684	12	3.4
STD-1500-1.5	1.5	57	34.8	28.3	39.5	1.2	570	855	12	2.9
STD-1500-2.0	2.0	57	40.0			1.2	570	1140	12	2.5
STD-1500-2.2	2.2	57	41.9			1.2	570	1254	12	2.3
STD-1500-2.5	2.5	57	44.6			1.2	570	1425	12	2.1
Ur 1700Vdc, Urms 575Vac, Upk 2000Vdc										
STD-1700-0.033	0.033	32		5.9	12.3	0.8	1350	45	3.9	24.6
STD-1700-0.047	0.047	32		7.4	13.8	0.8	1350	63	4.0	18.2
STD-1700-0.068	0.068	32	13.3	8.7	16.7	0.8	1350	92	4.1	13.7
STD-1700-0.10	0.10	32	15.8	11.1	19.1	0.8	1350	135	5.7	9.3
STD-1700-0.15	0.15	32	19.1	14.3	22.3	1.0	1350	203	8.0	7.0
STD-1700-0.22	0.22	32	22.8	16.5	27.7	1.0	1350	297	9.0	5.2
STD-1700-0.22	0.22	44	18.1	13.3	21.3	1.0	880	194	9.0	6.8
STD-1700-0.33	0.33	44	21.8	15.6	26.8	1.0	880	290	9.0	4.9
STD-1700-0.47	0.47	44	25.8	19.5	30.7	1.2	880	414	12	4.0
STD-1700-0.68	0.68	44	30.8	24.4	35.6	1.2	880	598	12	3.5
STD-1700-1.0	1.0	44	37.2	30.6	41.8	1.2	880	880	12	3.0
STD-1700-1.0	1.0	57	30.9	24.4	35.6	1.2	610	610	12	3.4
STD-1700-1.2	1.2	57	33.8	27.2	38.4	1.2	610	732	12	3.1
STD-1700-1.5	1.5	57	37.6			1.2	610	915	12	2.6
STD-1700-2.0	2.0	57	43.3			1.2	610	1220	12	2.4
Ur 2000Vdc, Urms 630Vac, Upk 2400Vdc										
STD-2000-0.022	0.022	32		5.4	11.8	0.8	1750	39	2.5	34.5
STD-2000-0.033	0.033	32		7.0	13.4	0.8	1750	58	3.5	23.7
STD-2000-0.047	0.047	32		8.1	16.1	0.8	1750	82	4.5	16.8
STD-2000-0.047	0.047	44	10.4	6.4	12.8	0.8	1000	47	4	21.0
STD-2000-0.068	0.068	32	15.0	10.3	18.3	1.0	1750	119	5.5	11.8

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)					du/dt (v/µs)	Ipeak A	Irms max. (A)	ESR (mΩ)
		flat, oval								
		L	D	T	H	d				
STD-2000-0.068	0.068	44	12.1	8.1	14.5	0.8	1000	68	5.5	16.3
STD-2000-0.10	0.10	32	17.8	13.1	21.1	1.0	1750	175	7.5	8.4
STD-2000-0.10	0.10	44	14.2	9.6	17.6	1.0	1000	100	7	12.4
STD-2000-0.15	0.15	44	17.1	12.4	20.4	1.0	1000	150	9	6.6
STD-2000-0.22	0.22	44	20.4	15.6	23.6	1.0	1000	220	9	6.0
STD-2000-0.33	0.33	44	24.7	18.4	29.6	1.2	1000	330	12	4.7
STD-2000-0.47	0.47	44	29.9	23.4	34.6	1.2	1000	473	12	3.9
STD-2000-0.56	0.56	44	32.4	25.9	37.1	1.2	1000	560	12	3.6
STD-2000-0.56	0.56	57	26.5	20.1	31.3	1.2	640	358	12	4.5
STD-2000-0.68	0.68	57	29.1	22.7	33.9	1.2	640	435	12	4.0
STD-2000-1.0	1.0	57	35.1	28.6	39.8	1.2	640	640	12	3.3
STD-2000-1.2	1.2	57	38.3			1.2	640	768	12	3.0
STD-2000-1.5	1.5	57	42.8			1.2	640	960	12	2.2
Ur 2500Vdc, Urms 700Vac, Upk 3000Vdc										
STD-2500-0.022	0.022	32		6.9	13.3	0.8	2150	47	3.5	24.0
STD-2500-0.033	0.033	32		8.2	16.2	0.8	2150	71	4	22.7
STD-2500-0.047	0.047	32	15.0	10.3	18.3	0.8	2150	101	5	15.5
STD-2500-0.068	0.068	32	17.3	13.0	21.0	1.0	2150	146	6.5	11.1
STD-2500-0.10	0.10	32	21.3	15.0	26.2	1.0	2150	215	8.5	7.8
STD-2500-0.10	0.10	44	16.9	12.1	20.1	1.0	1350	135	8.5	12.2
STD-2500-0.15	0.15	44	20.4	15.6	23.6	1.0	1350	203	9	8.1
STD-2500-0.22	0.22	44	24.4	18.1	29.3	1.2	1350	297	11	5.9
STD-2500-0.33	0.33	44	29.6	23.2	34.4	1.2	1350	446	12	4.5
STD-2500-0.33	0.33	57	24.7	18.3	29.5	1.2	880	290	12	5.4
STD-2500-0.47	0.47	57	29.2	22.8	34.0	1.2	880	414	12	4.4
STD-2500-0.68	0.68	57	34.9	28.4	39.6	1.2	880	598	12	3.7
STD-2500-0.82	0.82	57	38.3			1.2	880	722	12	3.3
STD-2500-1.0	1.0	57	42.2			1.2	880	880	12	2.8
Ur 3000Vdc, Urms 750Vac, Upk 3500Vdc										
STD-3000-0.0068	0.0068	32		5.1	9.9	0.8	2750	19	1.5	89.0
STD-3000-0.010	0.010	32		5.9	12.3	0.8	2750	28	2	61.0
STD-3000-0.015	0.015	32		7.1	13.5	0.8	2750	41	3	42.5
STD-3000-0.022	0.022	32	13.1	8.4	16.4	0.8	2750	61	4	28.5
STD-3000-0.033	0.033	32	15.7	11.0	19.0	1.0	2750	91	5	19.7
STD-3000-0.047	0.047	32	18.4	13.7	21.7	1.0	2750	129	6.5	13.8
STD-3000-0.047	0.047	44	14.7	10.0	18.0	1.0	1600	75	6	17.8
STD-3000-0.068	0.068	44	17.3	12.6	20.6	1.0	1600	109	8	12.8
STD-3000-0.10	0.10	44	20.7	14.5	25.7	1.2	1600	160	11	9.4
STD-3000-0.15	0.15	44	25.1	18.8	30.0	1.2	1600	240	12	6.8
STD-3000-0.22	0.22	44	30.2	23.7	34.9	1.2	1600	352	12	5.2
STD-3000-0.22	0.22	57	25.1	18.8	30.0	1.2	990	218	12	5.9
STD-3000-0.33	0.33	57	30.5	24.1	35.3	1.2	990	327	12	4.9
STD-3000-0.39	0.39	57	33.1	26.6	37.8	1.2	990	386	12	4.4
STD-3000-0.47	0.47	57	36.3			1.2	990	465	12	4.0
STD-3000-0.68	0.68	57	43.4			1.2	990	673	12	3.5

How to Order:

STD- 1200 – 0.47 – 44 FO

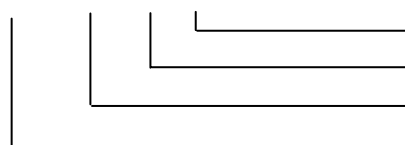

FO for flat, oval

Length

Capacitance

Voltage