REV.	ECN. NO.	APPD.
1	N/A	

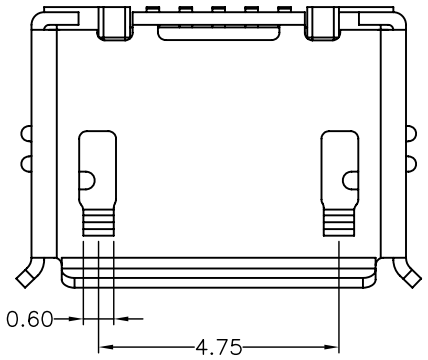

NOTE: 1.MATERIAL:

1.1 HOUSING: LCP E130i ,UL 94V-0
COLOR: BLACK.
1.2 TERMINAL : COPPER ALLOY
1.3 SHELL: COPPER ALLOY
2.FINISH:
2.1 TERMINAL:CONTACT AREA:Au3u",
SOLDER AREA:Au2u",
NICKEL 50~120u" FOR UNDERSTRATUM;
2.2 SHELL:TIN 80~120u" OVER NICKEL 50~120;
3.RATING:
OPERATING VOLTAGE: 500V
CURRENT RATING: 1.0A
OPERATING TEMPERATURE:-20°C~+85°C
4.ELECTRICAL:
INSULATOR RESISTANCE: 1000MΩ MIN.
WITHSTANDING VOLTAGE: 500 VAC / MINUTE
CONTACT RESISTANCE:30mΩ MAX.
5.MARK ▽C DIMENSION CONTROL BY QC.

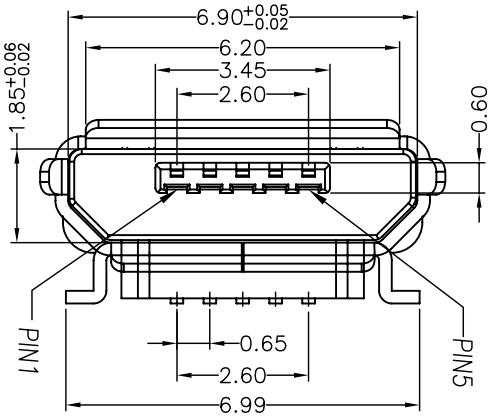

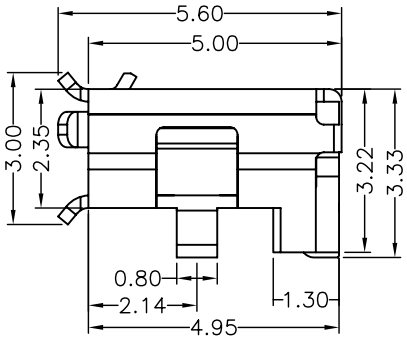

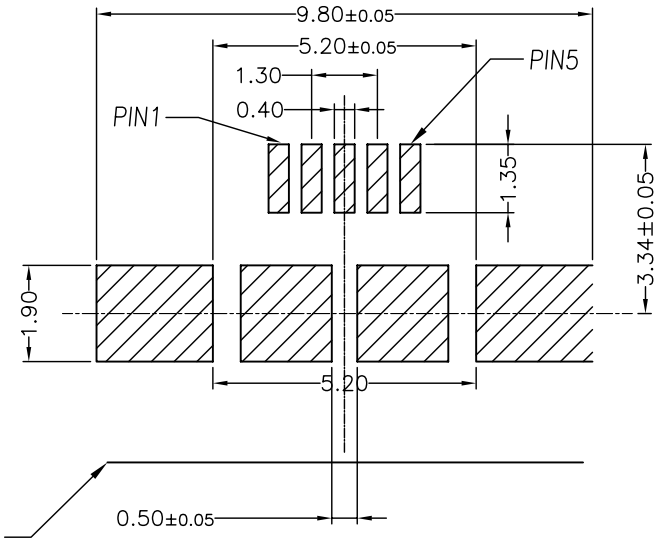

RECOMMENDED PCB LAYOUT

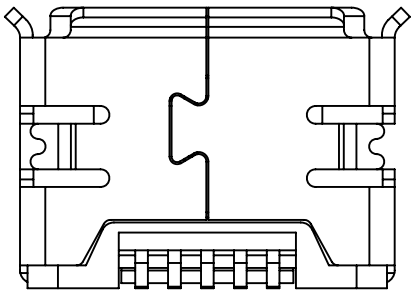

MEASURE POINT: QUADRANT POINT (QP) TANGERCY POINT (TP) INTERSECTION POINT (IP)		SHENZHEN WFD ELECTRONICS CO.,LTD				
UNLESS OTHERWISE SPECIFIED,TOLERANCE:		DESING Bill Yang	DATE 08.12.10	TITLE: MICRO 5PIN B TYPE 加高0.9mm		
X.	±0.20	CHECKED	DATE			
X.x	±0.15	APPROVED	DATE			
X.xx	±0.10	PART NO: MPB33D05G		REV: 1	SCALE: 1:1	UNIT: mm
ANGULAR	±3°	DRAWING NO: N/A		SIZE: A4	SHEET: 1/1	