


CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

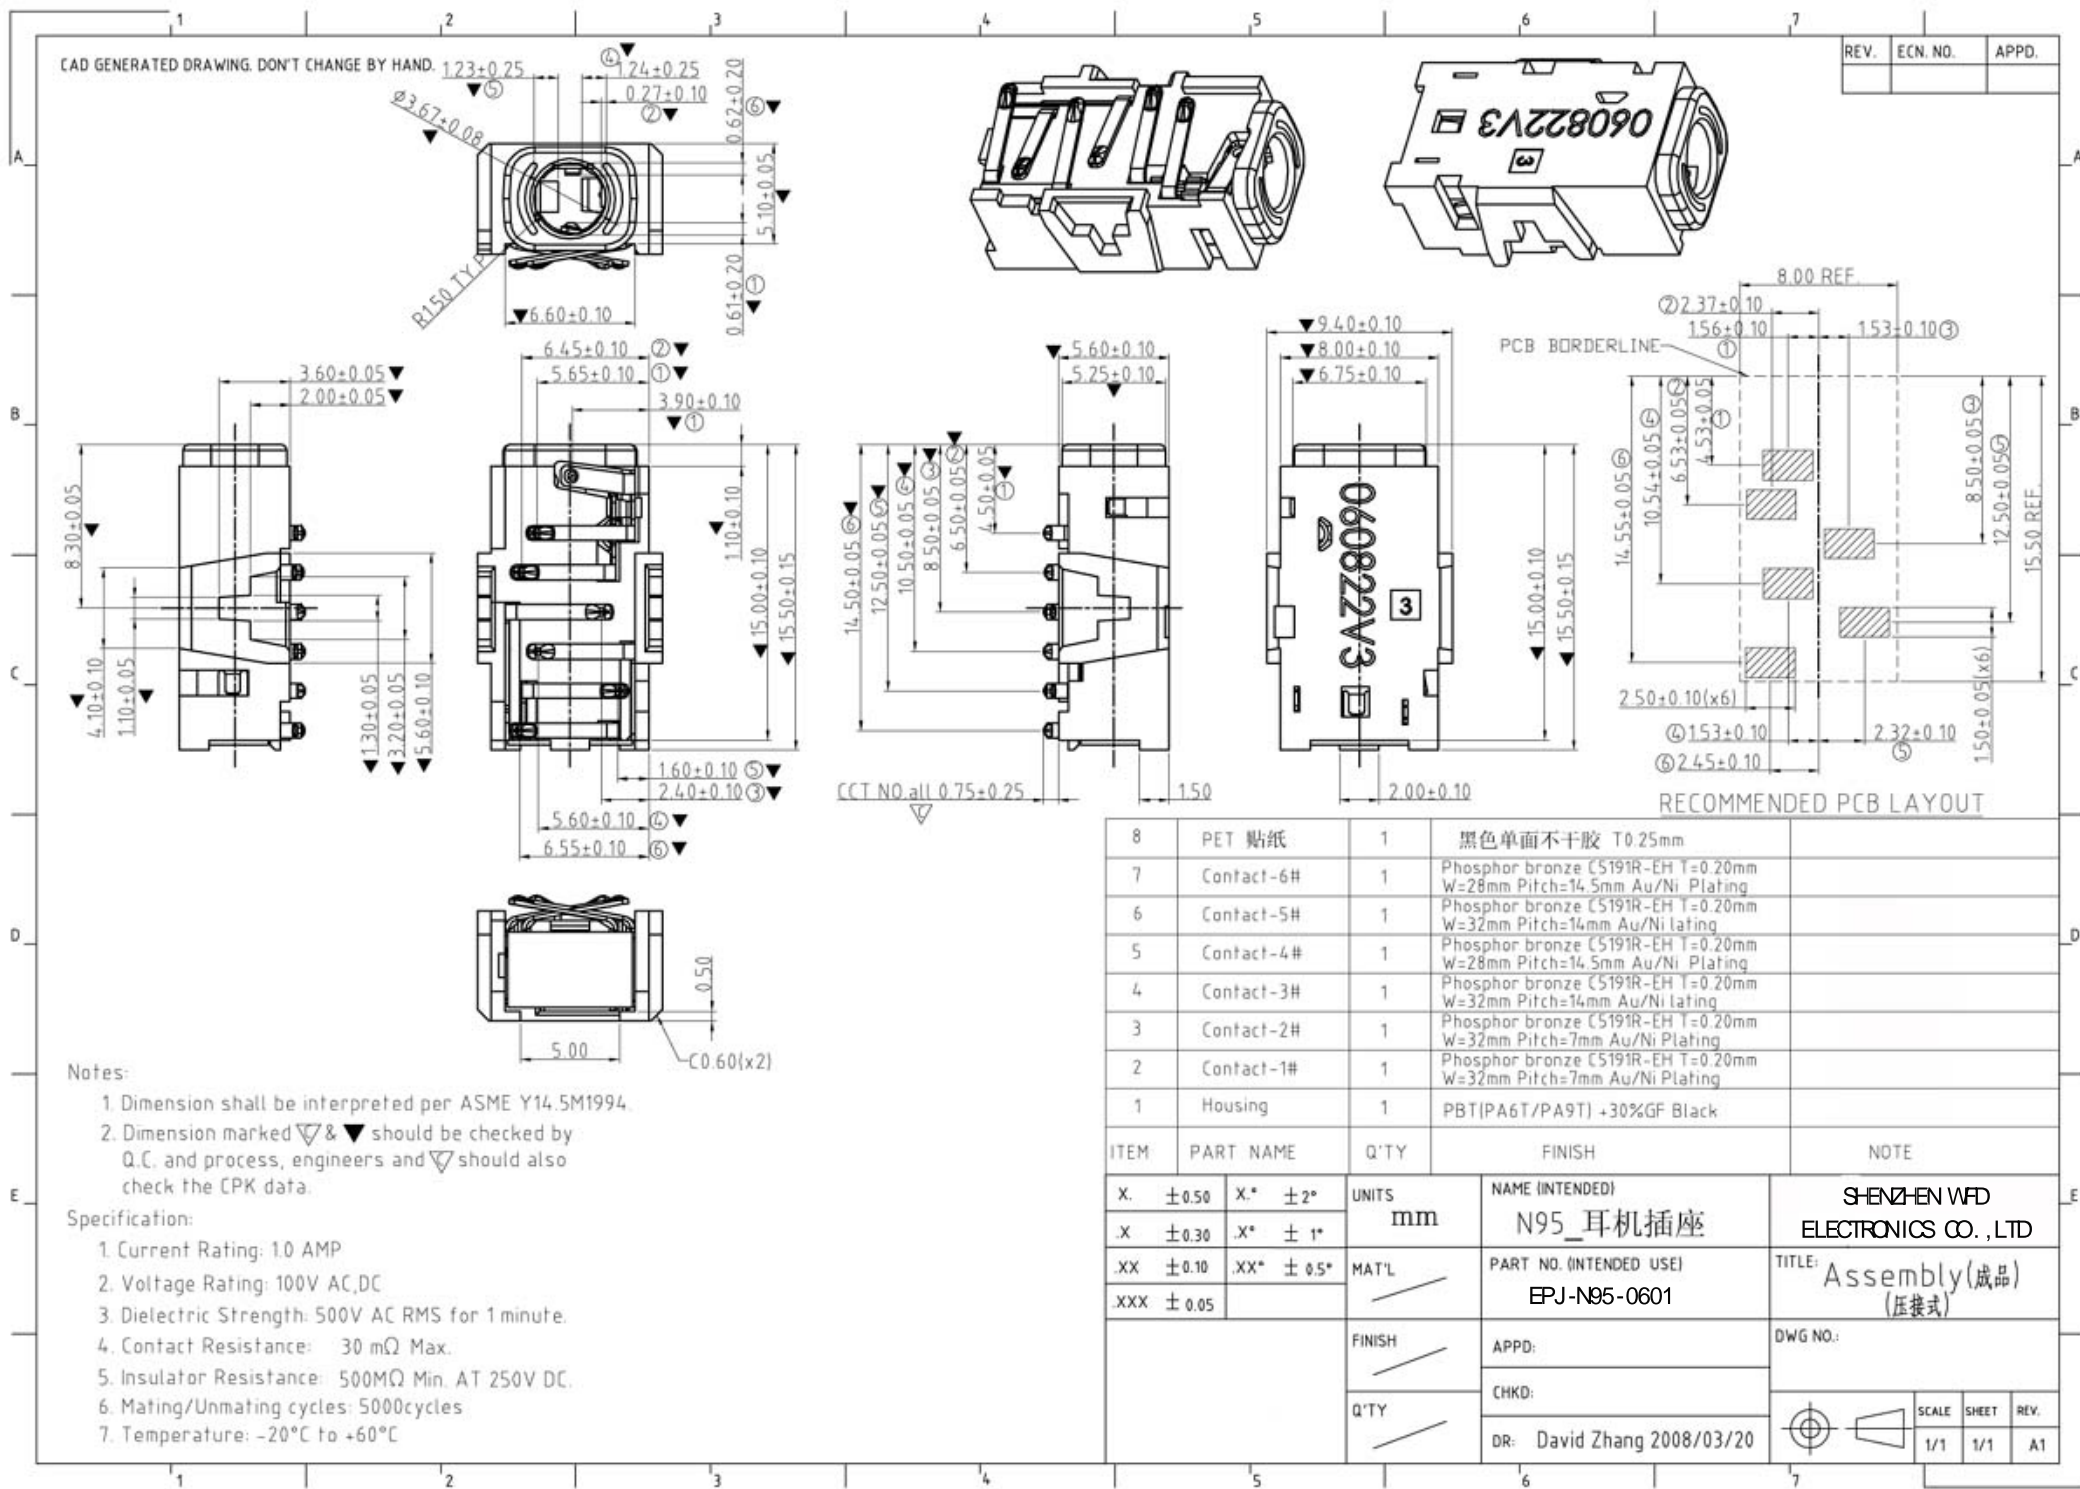

Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & \blacktriangledown should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 100V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 mΩ Max.
5. Insulator Resistance: 500MΩ Min. AT 250V DC.
6. Mating/Unmating cycles: 5000cycles
7. Temperature: -20°C to +60°C

ITEM	PART NAME	Q'TY	FINISH	NOTE
8	PET 贴纸	1	黑色单面不干胶 T0.25mm	
7	Contact-6#	1	Phosphor bronze C5191R-EH T=0.20mm W=28mm Pitch=14.5mm Au/Ni Plating	
6	Contact-5#	1	Phosphor bronze C5191R-EH T=0.20mm W=32mm Pitch=14mm Au/Ni Plating	
5	Contact-4#	1	Phosphor bronze C5191R-EH T=0.20mm W=28mm Pitch=14.5mm Au/Ni Plating	
4	Contact-3#	1	Phosphor bronze C5191R-EH T=0.20mm W=32mm Pitch=14mm Au/Ni Plating	
3	Contact-2#	1	Phosphor bronze C5191R-EH T=0.20mm W=32mm Pitch=7mm Au/Ni Plating	
2	Contact-1#	1	Phosphor bronze C5191R-EH T=0.20mm W=32mm Pitch=7mm Au/Ni Plating	
1	Housing	1	PBT(PA6T/PA9T) +30%GF Black	

X.	±0.50	X.*	±2*	UNITS	NAME (INTENDED)	SHENZHEN WFD ELECTRONICS CO., LTD
X	±0.30	.X*	± 1*			
XX	±0.10	.XX*	± 0.5*	MAT'L	PART NO. (INTENDED USE)	TITLE: Assembly(成品) (压接式)
.XXX	±0.05					
				FINISH	APPD:	DWG NO.:
				Q'TY	CHKD:	
					DR: David Zhang 2008/03/20	

				SCALE	SHEET	REV.
				1/1	1/1	A1