


产品特点

1. 新型薄膜材料作介质与铝箔一起卷绕而成,透明树脂包封。
2. 容量范围宽,容量误差小,良好的电气性能。


使用场合

1. 一般电子电路; VHF 信号耦合。
2. 小型电气产品电子电路。

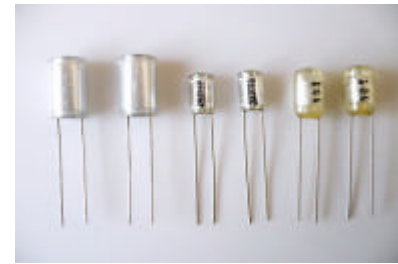

性能参数

技术标准	IEC 384-7
使用范围	-40 ~+85
额定电压	100V 250V 400V 1000V
静电容量范围	100pF~0.022uF
静电容量允许偏差	±2% ±5% ±10%
损耗角正切值	0.25% max (20 1KHZ)
耐电压	端子间额定电压 × 200% 1~5S
绝缘电阻	50,000M

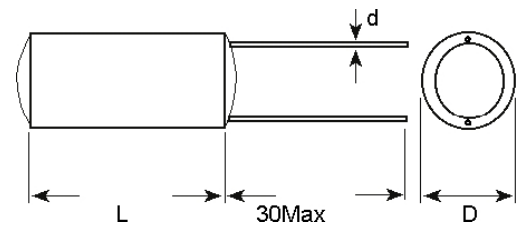

规格尺寸

单位: mm

Cap(pF)	100Vdc		250Vdc/400Vdc		630Vdc		1000Vdc	
	D	L	D	L	D	L	D	L
100-120	5.0	10	5.2	13	5.5	13	6.0	15
150	5.0	10	5.2	13	5.5	13	6.0	15
180	5.0	10	5.2	13	5.5	13	6.0	15
220	5.0	10	5.2	13	5.5	13	6.5	15
270	5.0	10	5.2	13	5.5	13	6.5	15
330	5.0	10	5.2	13	5.5	13	7.0	15
390	5.0	10	5.2	13	5.5	13	7.0	15
470	5.0	10	5.2	13	5.5	13	7.0	15
560	5.0	10	5.2	13	6.0	15	7.5	15
680	5.0	10	5.2	13	6.0	15	8.0	15
820	5.0	10	6.1	13	6.0	15	8.0	15
1000	5.0	10	6.1	13	6.5	15	8.5	16
1200	5.0	10	6.1	13	7.0	15	8.5	16
1500	5.0	10	6.6	13	7.5	15	9.0	16
1800	5.0	10	6.6	13	8.0	15	9.5	16
2200	5.2	10	7.1	13	8.5	15	10	16
2700	5.2	10	7.1	13	9.0	15	10	16
3300	5.2	10	7.6	15	9.5	15	11	16
3900	5.2	11	7.6	15	10	15		
4700	5.2	11	9.1	19	10.5	15		
5600	5.2	11	9.1	19	11	15		
6800	5.2	11	9.1	19	12	15		
8200	5.2	11	9.1	19	13	15		
10000	5.5	11	9.1	19	13	15		