

政宇电子—专业连接器生产商


ZYA1250 SERIES

ZYA1250-T

1.25mm pitch Crimp Terminal

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 100V AC, DC
 Temperature range: -25°C - +85°C
 Insulation resistance: 500MΩ/ min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20mΩ/ max.

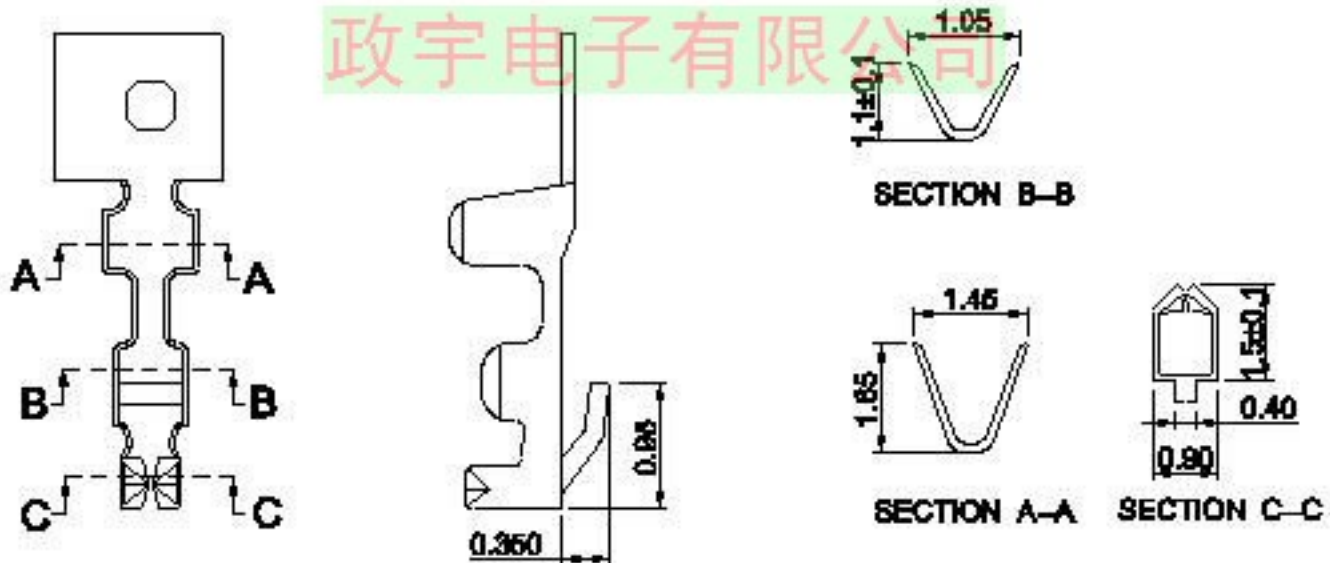


USED IN ZYA1250 SERIES HOUSING

Unit:mm

PART NO.	WIRE RANGE	INSULATION O.D.	MATERIAL	FINISH
ZYA1250-TP	AWG#28-#32	1.0mm(MAX)	PHOSPHOR BRONZE	TIN-PLATED

ZYA1250H

1.25mm pitch Housing

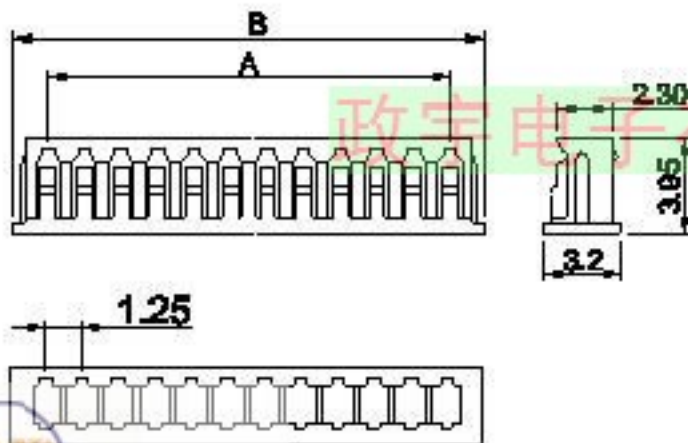

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250H-02	1.25	4.25
3	ZYA1250H-03	2.50	5.50
4	ZYA1250H-04	3.75	6.75
5	ZYA1250H-05	5.00	8.00
6	ZYA1250H-06	6.25	9.25
7	ZYA1250H-07	7.50	10.50
8	ZYA1250H-08	8.75	11.75
9	ZYA1250H-09	10.0	13.00
10	ZYA1250H-10	11.25	14.25
11	ZYA1250H-11	12.50	15.50
12	ZYA1250H-12	13.75	16.75
13	ZYA1250H-13	15.00	18.00
14	ZYA1250H-14	16.25	19.25
15	ZYA1250H-15	17.50	20.50

Unit:mm

MATERIAL :NYLON UL94V-0
 SUITABLE ZYA1250-T SERIES TERMINAL
 MATCH WITH ZYA1250F SERIES WAFER


东莞市政宇电子有限公司
 Zhengyu Electronics Co., Ltd

ZYA1250M-T




1.25mm pitch Crimp Terminal

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 100V AC, DC
 Temperature range: -25°C - +85°C
 Insulation resistance: 500MΩ/min.
 Withstanding voltage: 500V AC/minute.
 Contact resistance: 20mΩ/max.

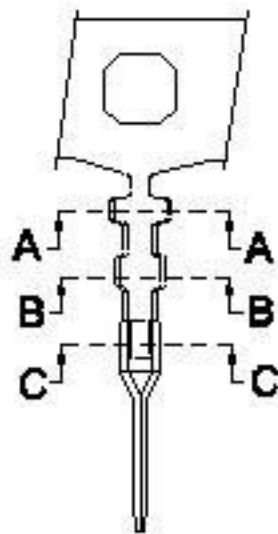

政宇电子有限公司

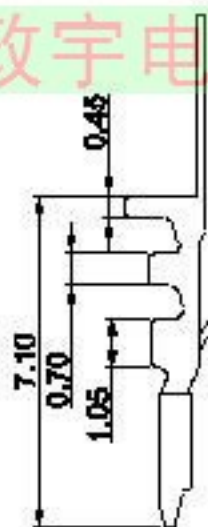


USED IN ZYA1250F SERIES HOUSING

Unit:mm


PART NO.	WIRE RANGE	INSULATION O.D.	MATERIAL	FINISH
ZYA1250M-TP	AWG#26-#32	1.0mm(MAX)	PHOSPHOR BRONZE	TIN-PLATED

ZYA1250HF

1.25mm pitch Housing




政宇电子有限公司

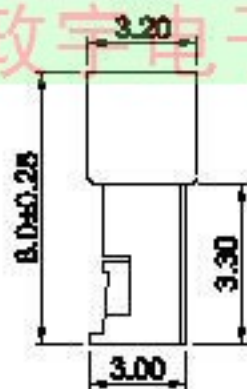

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250HF-02	1.25	4.25
3	ZYA1250HF-03	2.50	5.50
4	ZYA1250HF-04	3.75	6.75
5	ZYA1250HF-05	5.00	8.00
6	ZYA1250HF-06	6.25	9.25
7	ZYA1250HF-07	7.50	10.50
8	ZYA1250HF-08	8.75	11.75
9	ZYA1250HF-09	10.0	13.00
10	ZYA1250HF-10	11.25	14.25

Unit:mm

MATERIAL: PBT UL94V-0
 SUITABLE ZYA1250M-T SERIES TERMINAL
 MATES WITH ZYA1250F SERIES WAFER

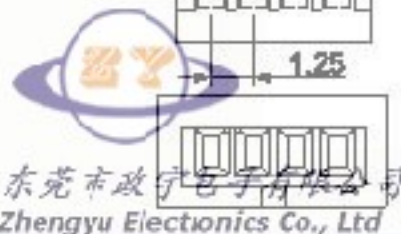



ZYA1250 SERIES

ZYA1250FR



1.25mm pitch 90° Wafer

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 100V AC, DC
 Temperature range: -25°C - +85°C
 Insulation resistance: 300M Ω /min.
 Withstanding voltage: 500V AC/minute.
 Contact resistance: 20m Ω /max.



P.C.B LAYOUT

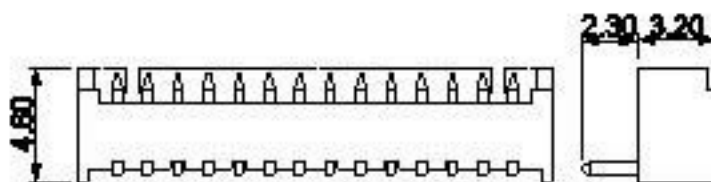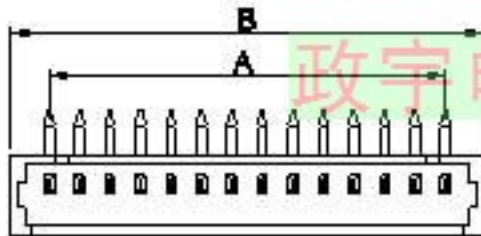



MATERIAL: BRASS/TIN-PLATED
 WAFER: NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FR02	1.25	4.25
3	ZYA1250-FR03	2.50	5.50
4	ZYA1250-FR04	3.75	6.75
5	ZYA1250-FR05	5.00	8.00
6	ZYA1250-FR06	6.25	9.25
7	ZYA1250-FR07	7.50	10.50
8	ZYA1250-FR08	8.75	11.75
9	ZYA1250-FR09	10.0	13.00
10	ZYA1250-FR10	11.25	14.25
11	ZYA1250-FR11	12.50	15.50
12	ZYA1250-FR12	13.75	16.75
13	ZYA1250-FR13	15.00	18.00
14	ZYA1250-FR14	16.25	19.25
15	ZYA1250-FR15	17.50	20.50



Unit:mm

ZYA1250FV

1.25mm pitch 180° Wafer



P.C.B LAYOUT

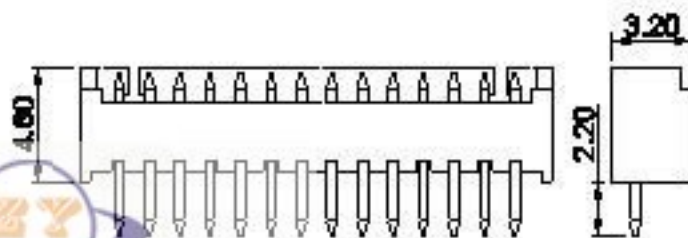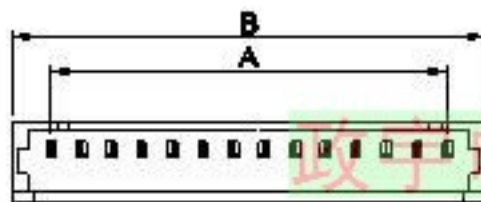

MATERIAL: BRASS/TIN-PLATED
 WAFER: NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FV02	1.25	4.25
3	ZYA1250-FV03	2.50	5.50
4	ZYA1250-FV04	3.75	6.75
6	ZYA1250-FV05	5.00	8.00
6	ZYA1250-FV06	6.25	9.25
7	ZYA1250-FV07	7.50	10.50
8	ZYA1250-FV08	8.75	11.75
9	ZYA1250-FV09	10.0	13.00
10	ZYA1250-FV10	11.25	14.25
11	ZYA1250-FV11	12.50	15.50
12	ZYA1250-FV12	13.75	16.75
13	ZYA1250-FV13	15.00	18.00
14	ZYA1250-FV14	16.25	19.25
15	ZYA1250-FV15	17.50	20.50

Unit:mm




东莞市政宇电子有限公司
 Zhengyu Electronics Co., Ltd


ZYA1250FRAS — 1.25mm pitch 90° Wafer-SMT TYPE

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 100V AC, DC
 Temperature range: -25°C - +85°C
 Insulation resistance: 500M Ω / min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20m Ω / max.

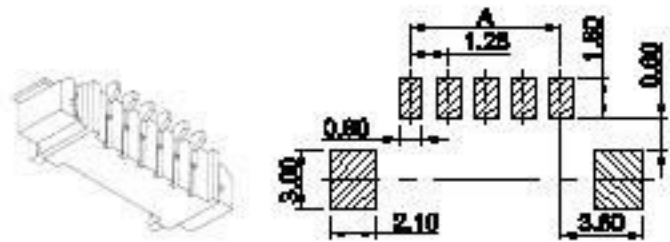

P.C.B LAYOUT

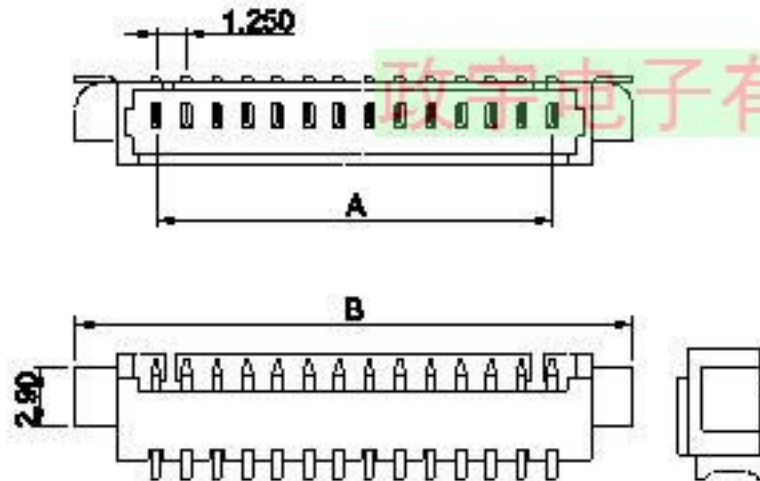


MATERIAL: BRASS/TIN-PLATED
 WAFER: NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FRAS02	1.25	7.35
3	ZYA1250-FRAS03	2.50	8.80
4	ZYA1250-FRAS04	3.75	9.85
5	ZYA1250-FRAS05	5.00	11.10
6	ZYA1250-FRAS06	6.25	12.35
7	ZYA1250-FRAS07	7.50	13.60
8	ZYA1250-FRAS08	8.75	14.85
9	ZYA1250-FRAS09	10.00	16.10
10	ZYA1250-FRAS10	11.25	17.35
11	ZYA1250-FRAS11	12.50	18.60
12	ZYA1250-FRAS12	13.75	19.85
13	ZYA1250-FRAS13	15.00	21.10
14	ZYA1250-FRAS14	16.25	22.35
15	ZYA1250-FRAS15	17.50	23.60

NOTE: A:半耳

Unit:mm

ZYA1250FVAS — 1.25mm pitch 180° Wafer-SMT TYPE

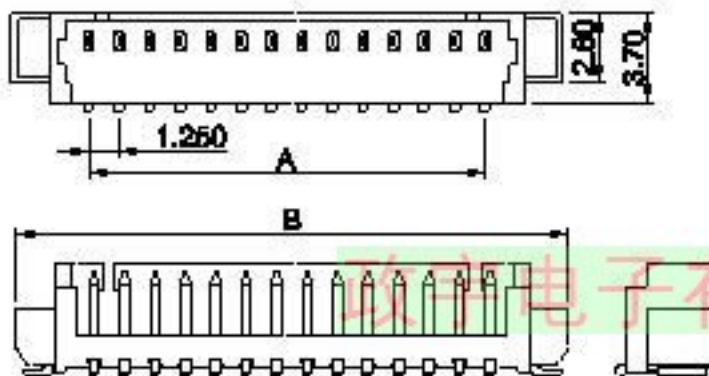

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FVAS02	1.25	7.35
3	ZYA1250-FVAS03	2.50	8.60
4	ZYA1250-FVAS04	3.75	9.85
5	ZYA1250-FVAS05	5.00	11.10
6	ZYA1250-FVAS06	6.25	12.35
7	ZYA1250-FVAS07	7.50	13.60
8	ZYA1250-FVAS08	8.75	14.85
9	ZYA1250-FVAS09	10.00	16.10
10	ZYA1250-FVAS10	11.25	17.35
11	ZYA1250-FVAS11	12.50	18.60
12	ZYA1250-FVAS12	13.75	19.85
13	ZYA1250-FVAS13	15.00	21.10
14	ZYA1250-FVAS14	16.25	22.35
15	ZYA1250-FVAS15	17.60	23.60

NOTE: A:半耳

Unit:mm

MATERIAL: BRASS/TIN-PLATED
 WAFER: NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING





东莞市政宇电子有限公司
 Zhengyu Electronics Co., Ltd

ZYA1250 SERIES

ZYA1250FRS — 1.25mm pitch 90° Wafer-SMT TYPE

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 100V AC, DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 500MΩ/ min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20mΩ/ max.

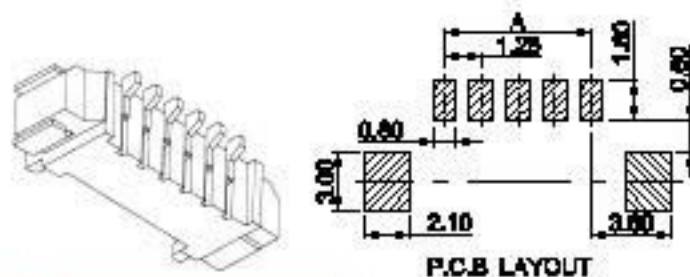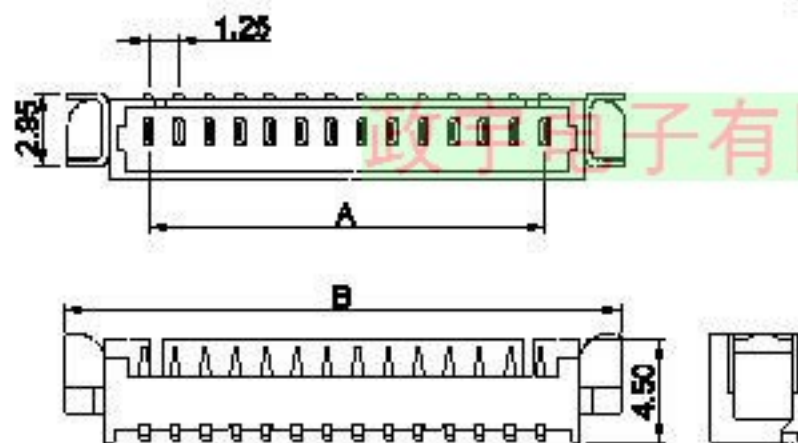


PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FRS02	1.25	7.35
3	ZYA1250-FRS03	2.50	8.60
4	ZYA1250-FRS04	3.75	9.85
6	ZYA1250-FRS05	5.00	11.10
6	ZYA1250-FRS06	6.25	12.35
7	ZYA1250-FRS07	7.50	13.60
8	ZYA1250-FRS08	8.75	14.85
9	ZYA1250-FRS09	10.0	16.10
10	ZYA1250-FRS10	11.25	17.35
11	ZYA1250-FRS11	12.50	18.60
12	ZYA1250-FRS12	13.75	19.85
13	ZYA1250-FRS13	15.00	21.10
14	ZYA1250-FRS14	16.25	22.35
15	ZYA1250-FRS15	17.50	23.60

Unit:mm

MATERIAL:BRASS/TIN-PLATED
 WAFER:NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING

ZYA1250FVS — 1.25mm pitch 180° Wafer-SMT TYPE

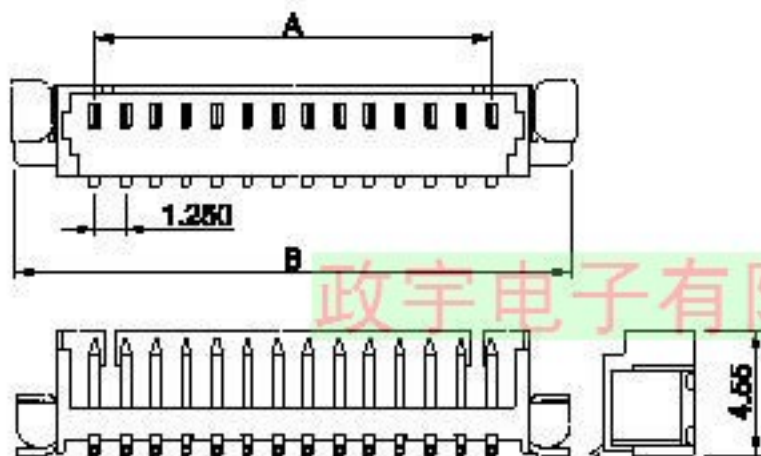

PIN	PART No.	Dimension mm	
		A	B
2	ZYA1250-FVS02	1.25	7.35
3	ZYA1250-FVS03	2.50	8.60
4	ZYA1250-FVS04	3.75	9.85
5	ZYA1250-FVS05	5.00	11.10
6	ZYA1250-FVS06	6.25	12.35
7	ZYA1250-FVS07	7.50	13.60
8	ZYA1250-FVS08	8.75	14.85
9	ZYA1250-FVS09	10.0	16.10
10	ZYA1250-FVS10	11.25	17.35
11	ZYA1250-FVS11	12.50	18.60
12	ZYA1250-FVS12	13.75	19.85
13	ZYA1250-FVS13	15.00	21.10
14	ZYA1250-FVS14	16.25	22.35
15	ZYA1250-FVS15	17.50	23.60

Unit:mm

MATERIAL:BRASS/TIN-PLATED
 WAFER:NYLON UL94V-0
 MATES WITH ZYA1250H SERIES HOUSING

政宇电子有限公司
 Zhengyu Electronics Co., Ltd

Certificate of Registration



The Governing Board of
Q.A. International Certification Limited
hereby grants to:

东莞市政宇电子有限公司

Registration No.: QAIC/CN/71128-B

(hereinafter called the Registered Company) the right as is listed in the Directory of Registered Companies in respect of the services listed below. These services shall be offered by the Registered Company at or from only the address given below in accordance with the quality management system in compliance with ISO 9001:2000.

Address to which this Certificate refers:

中国广东省东莞市虎门镇路东村新安大道解放小组路致南侧

Approved Scope to which this Certificate refers.

认证范围：电子制品（电脑连接器）的生产

(Further clarification regarding the Scope of this Certificate and the applicability of ISO 9001:2000 requirements may be obtained by consulting the organisation)

Signed for and on behalf of the Board.

CHAIRMAN

SCHEME MANAGER

A. J. Duffield

A. Carter

Certificate Issue Date: 20th November 2007 - Certificate Expiry Date: 20th November 2008
Date of Initial Registration: 20th November 2007 - Re-assessment Date: 20th November 2010

This Certificate of Registration is granted subject to the Regulations approved by the Board.

QA INTERNATIONAL

Q.A. International Certification Ltd.
Clarendon Hall
Clarendon Street
Buckingham
Gosport
Hants

Tel: +44 (0)1329 564772
Fax: +44(0)1325 490980
www.qaic.com



The use of the QA International logo and the name of the organization in any form, without the written permission of the organization, is prohibited.



ZYA0800(JST0.8刺破式)



ZYA1001(JST1.0)




ZYB1259(1.25插板式)



ZYA1500(ZH1.5)



ZYA1006(JAE FIX1.0)

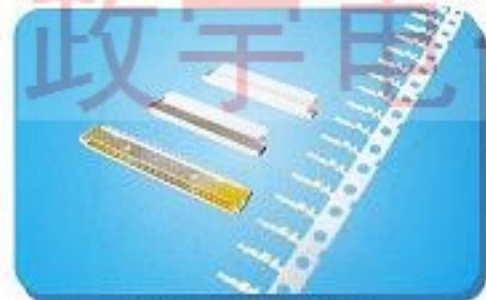

ZYA1007(DF19 1.0)



ZYA1501(MX1.5)



ZYB1502(JST1.5插板式)



ZYA1250(MX1.25)




ZYA1251(JAE1.25)



ZYA2001(PH2.0)



ZYA2002(MX2.0)

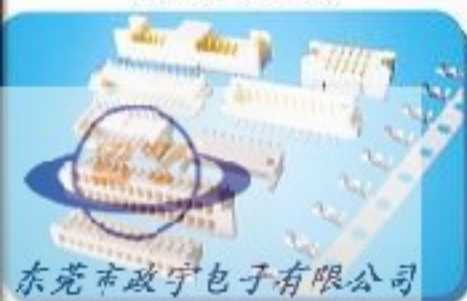

ZYA1253(DF14 1.25)



ZYA2004(PHD2.0)



ZYA2013(AMP2.0)

政宇电子有限公司



宇电子有限公司



东莞市政宇电子有限公司
Zhengyu Electronics Co., Ltd

政宇电子作为一家专业从事高端精密连接器制造的知名企业,始终贯彻信誉第一,质量为本的理念,多年来无论是产品或是服务均得到了全体客户的一致好评。

现公司计划全国大力拓展新业务,竭诚欢迎新老客户,代理商及贸易商联系业务:

手机: 130 5238 1500 邓经理

地址: 上海市闵行区莘浜路428弄

电话: 021--2908 2916

传真: 021--5494 2290

QQ: 2956 52891

阿里巴巴诚信通会员号: hijackdeng

公司主页:

<http://www.hijackdeng.com.cn>