





YB312-500M
YB312-508M/YB312-762M

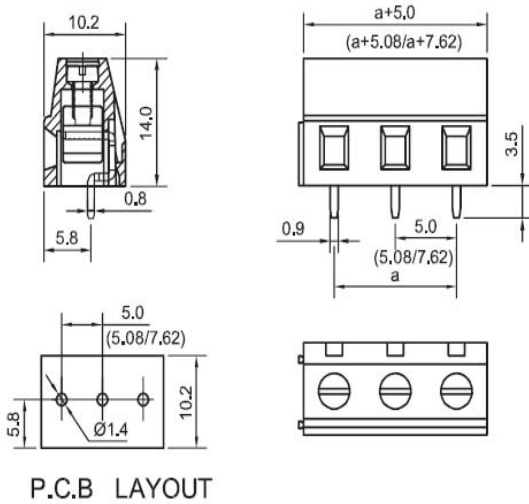

Pitch:5.00mm;5.08mm;7.62mm

Poles: 2~3 poles

Approval: 

◆ 材质及电镀

压线框: 黄铜镀镍
插脚: 黄铜镀锡
塑件: PA66, UL94V-0
螺丝: M2.5, 钢镀锌
颜色: 绿色

◆ Material

Care clamp : Brass, Ni Plated
Contact : Brass, Tin Plated
Housing : PA66, UL94V-0
Screws : M2.5 steel Zinc plated
Color : Green

◆ 工作环境

操作温度: -40° ~ $+150^{\circ}$
瞬间温度: $+250^{\circ}$ 5秒

◆ Environmental

Operation temperature : -40° ~ $+150^{\circ}$
Short-time temperature : $+250^{\circ}$ for 5 sec

◆ 电气规格

额定电压: 300V
额定电流: 16A
接触电阻: 20m Ω
绝缘电阻: $>5000M\Omega$ DC500V
耐电压: AC2000V/1Min
使用线径: 24-12AWG 2.5mm²
剥线长度: 6-7mm

◆ Electrical

Rated voltage : 300V
Rated current : 16A
Contact resistance : 20m Ω
Insulationt resistance : $>5000M\Omega$ DC500V
Withstanding voltage : AC2000V/1Min
Wire range : 24-12AWG 2.5mm²
Strip length : 6-7mm