



YB432-508M

Pitch: 5.08mm

Poles: 2~3 poles

Approval: 

◆ 材质及电镀

压线框：黄铜镀镍
 插脚：黄铜镀锡
 塑件：PA66, UL94V-0
 螺丝：M2.5, 钢镀锌
 颜色：绿色

◆ Material

Care clamp : Brass, Ni Plated
 Contact : Brass, Tin Plated
 Housing : PA66, UL94V-0
 Screws : M2.5steel Zinc plated
 Color : Green

◆ 工作环境

操作温度：-40° ~+150°
 瞬间温度：+250° 5秒

◆ Environmental


Operation temperature : -40° ~+150°
 Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V
 额定电流：16A
 接触电阻：20m Ω
 绝缘电阻：>5000MΩ DC500V
 耐压：AC2000V/1Min
 使用线径：24-12AWG 2.5mm²
 剥线长度：6-7mm

◆ Electrical

Rated voltage : 300V
 Rated current : 16A
 Contact resistance : 20m Ω
 Insulationt resistance : >5000MΩ DC500V
 Withstanding voltage : AC2000V/1Min
 Wire range : 24-12AWG 2.5mm²
 Strip length : 6-7mm

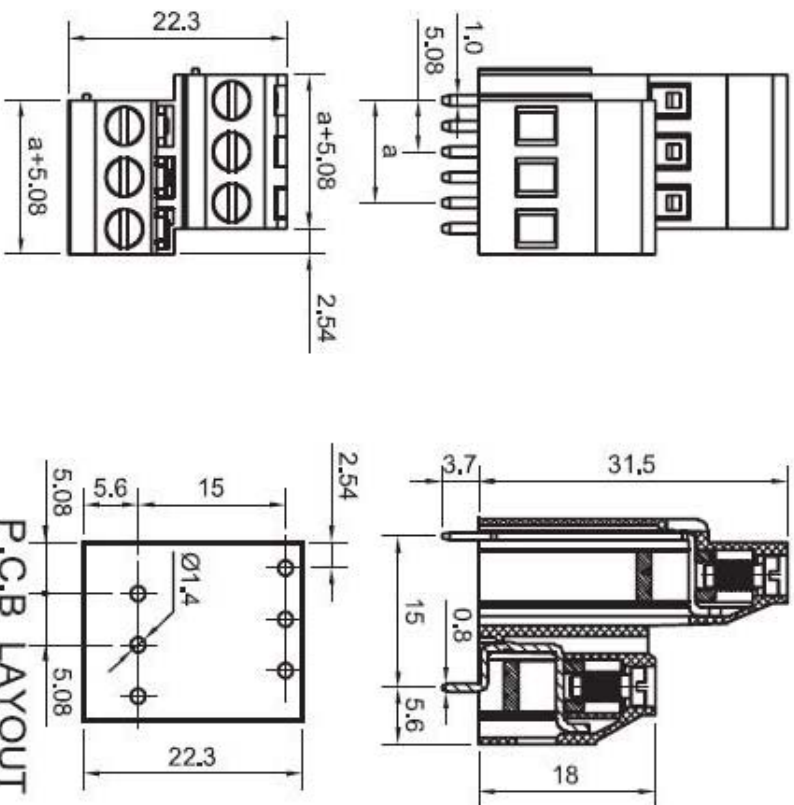

P.C.B LAYOUT