



YE13R-500M / YE13R-508M

Pitch: 5.00mm; 508mm

Poles: 2~3 poles

Approval: 

◆ 材质及电镀

方 针 : 黄铜镀锡
 塑 件 : PA66, UL94V-0
 颜 色 : 绿色

◆ Material

Pinny : Brass, Tin Plated
 Housing : PA66, UL94V-0
 Color : Green

◆ 工作环境

操作温度: -40° ~ $+150^{\circ}$
 瞬间温度: $+250^{\circ}$ 5秒

◆ Environmental


Operation temperature : -40° ~ $+150^{\circ}$
 Short-time temperature : $+250^{\circ}$ for 5 sec

◆ 电气规格

额定电压 : 300V
 额定电流 : 16A
 接触电阻 : $20m\ \Omega$
 绝缘电阻 : $>5000M\ \Omega$ DC500V
 耐 电 压 : AC2000V/1Min

◆ Electrical

Rated voltage : 300V
 Rated current : 16A
 Contact resistance : $20m\ \Omega$
 Insulation resistance : $>5000M\ \Omega$ DC500V
 Withstanding voltage : AC2000V/1Min

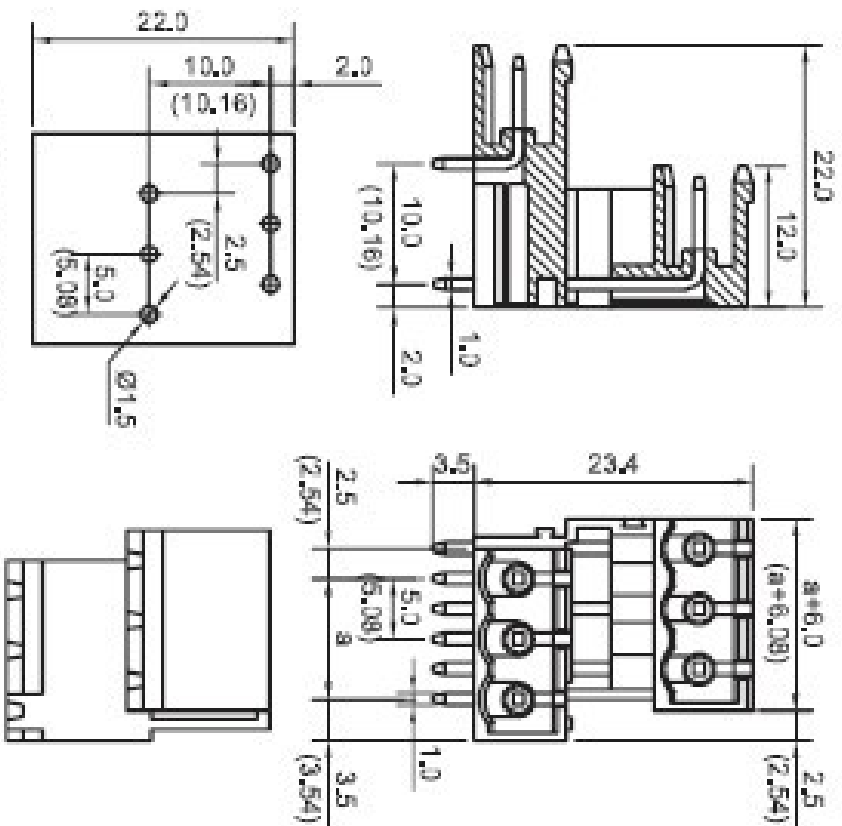

P.C.B LAYOUT