



YE160-500 / YE160-508

Pitch: 5.00mm; 508mm

Poles: 2~24 poles



Approval: 

#### ◆ 材质及电镀

方 针：黄铜镀锡  
塑 件：PA66, UL94V-0  
颜 色：绿色

#### ◆ Material

Polcy : Brass, Tin Plated  
Housing : PA66, UL94V-0  
Color : Green

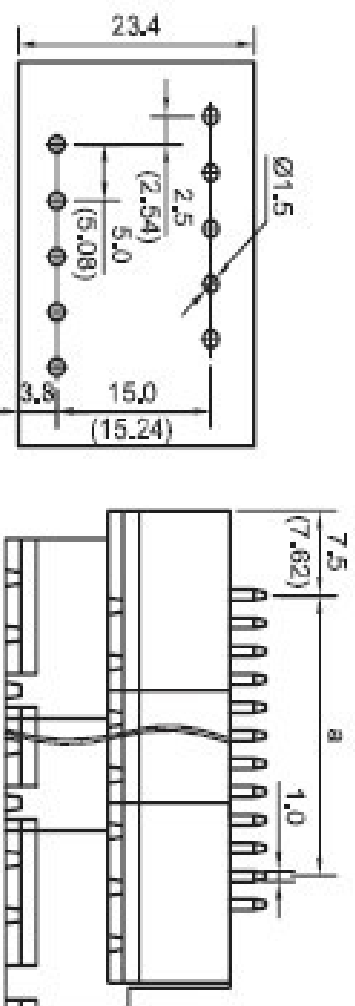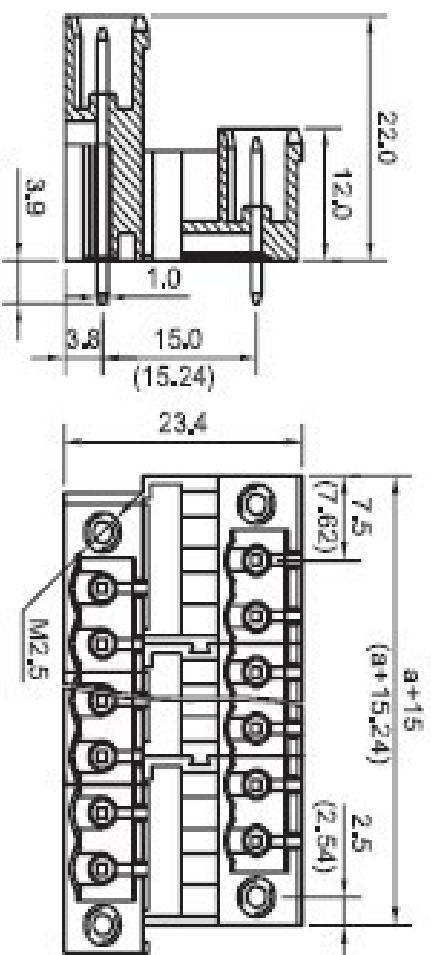

P.C.B LAYOUT

#### ◆ 工作环境

操作温度：-40° ~+150°  
瞬间温度：+250° 5秒

#### ◆ Environmental

Operation temperature : -40° ~+150°  
Short-time temperature: +250° for 5 sec

#### ◆ 电气规格

额定电压：300V  
额定电流：16A  
接触电阻：20m Ω  
绝缘电阻：>5000M Ω DC500V  
耐 电 压：AC2000V/1Min

#### ◆ Electrical

Rated voltage : 300V  
Rated current : 16A  
Contact resistance : 20m Ω  
Insulation resistance : >5000M Ω DC500V  
Withstanding voltage : AC2000V/1Min