



## YE210-500M / YE210-508M

Pitch:5.00mm;508mm

Poles: 2~3 poles

Approval: 

### ◆ 材质及电镀

方 针：黄铜镀锡  
 塑 件：PA66, UL94V-0  
 颜 色：绿色

### ◆ Material

Polloy : Brass, Tin Plated  
 Housing : PA66,UL94V-0  
 Color : Green

### ◆ 工作环境

操作温度：-40° ~+150°  
 瞬间温度：+250° 5秒

### ◆ Environmental




Operation temperature : -40° ~+150°  
 Short-time temperature : +250° for 5 sec

### ◆ 电气规格

额定电压：300V  
 额定电流：16A  
 接触电阻：20mΩ  
 绝缘电阻：>5000MΩ DC500V  
 耐电 压：AC2000V/1Min

### ◆ Electrical

Rated voltage : 300V  
 Rated current : 16A  
 Contact resistance : 20m Ω  
 Insulation t resistance : >5000MΩ DC500V  
 Withstanding voltage : AC2000V/1Min

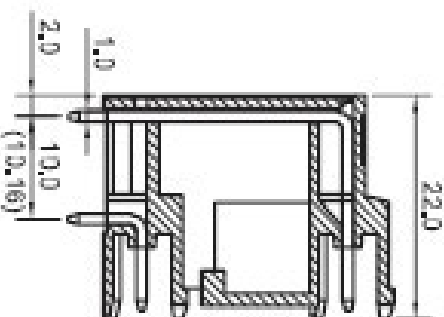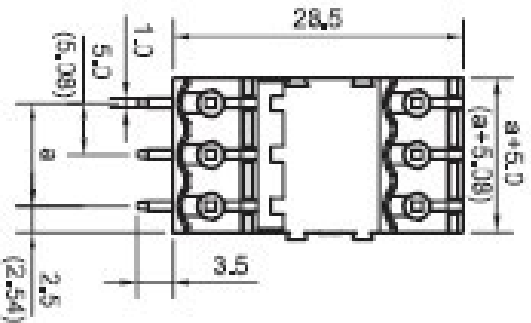

P.C.B LAYOUT