



YE23R-500M / YE23R-508M

Pitch:5.00mm;508mm

Poles: 2~3 poles





Approval: 

◆ 材质及电镀

方 针：黄铜镀锡  
塑 件：PA66, UL94V-0  
颜 色：绿色

◆ Material

Polioy : Brass, Tin Plated  
Housing : PA66, UL94V-0  
Color : Green

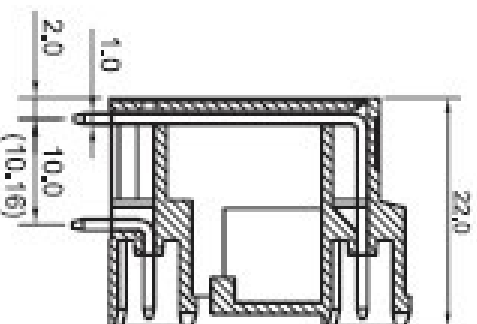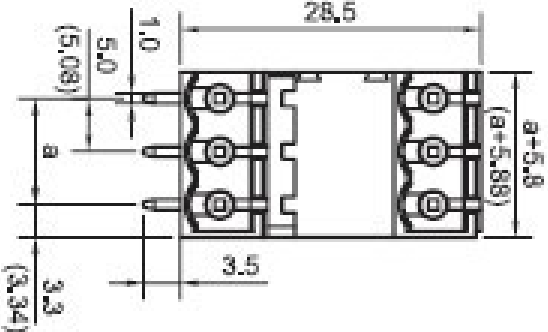

P.C.B LAYOUT

◆ 工作环境

操作温度：-40° ~+150°  
瞬间温度：+250° 5秒

◆ Environmental

Operation temperature : -40° ~+150°  
Short-time temperature : +250° for 5 sec

◆ 电气规格

额定电压：300V  
额定电流：16A  
接触电阻：20mΩ  
绝缘电阻：>5000MΩ DC500V  
耐电 压：AC2000V/1Min

◆ Electrical

Rated voltage : 300V  
Rated current : 16A  
Contact resistance : 20m Ω  
Insulation t resistance : >5000M Ω DC500V  
Withstanding voltage : AC2000V/1Min