


松填(STTECH)TCS系列

一、规格尺寸(CASE DIMENSIONS:mm)

Code	EIA Code	L \pm 0.20	W \pm 0.20 -0.10	H \pm 0.20 -0.10	W ₁ \pm 0.20	A \pm 0.30 -0.20	S Min
P	2012	2.05	1.35	1.50	1.20	0.50	0.85
A	3216	3.20	1.60	1.60	1.20	0.80	1.10
B	3528	3.50	2.80	1.90	2.20	0.80	1.40
C	6032	6.00	3.20	2.60	2.20	1.30	2.90
D	7343-31	7.30	4.30	2.90	2.40	1.30	4.40
E	7343-43	7.30	4.30	4.10	2.40	1.30	4.40



二、编码(PART NUMBER)


TC S A 106 M 010 R *

① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① 钽电容
- ② 产品系列: S=标准型
- ③ 体积
- ④ 容量 106=10UF
- ⑤ 误差: M=±20% K=±10%
- ⑥ 耐压
- ⑦ 包装: R=7" 卷式
- ⑧ 附加码

三、标识系统(MARKINGS)

[A case](exemple 10 μ F/10V)

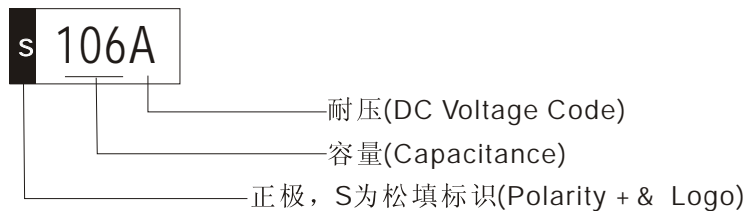

[B,C,D,E cases](exemple 100 μ F/6.3V)

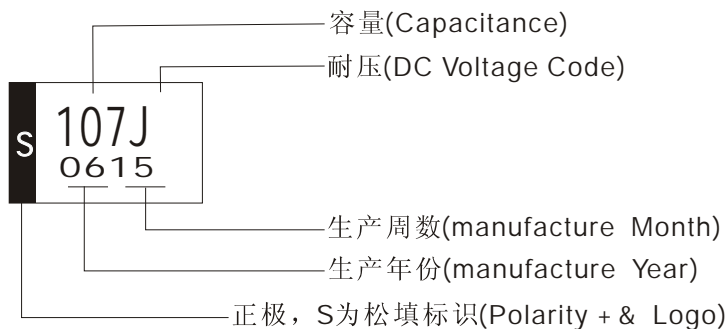

DC Rated Voltage code

Code	G	J	A	C	D	E	V	T
Rated Voltage	4V	6.3V	10V	16V	20V	25V	35V	50V

四、容量范围(Capacitance and Rated Voltage Range)

Capacitance		Rated voltage DC (VR)								
uF	Code	2.5V (F)	4V (G)	6.3V (J)	10V (A)	16V (C)	20V (D)	25V (E)	35V (V)	50V (T)
0.1	104								A	A
0.15	154								A	A/B
0.22	224								A	A/B
0.33	334								A	B
0.47	474							A	A/B	C
0.68	684						A	A	A/B	C
1	105				P	A	A	A	A/B	B/C
1.5	155				A	A	A	A/B	A/B/C	C/D
2.2	225			P/A	P/A	P/A/B	A/B	A/B	B/C	C/D
3.3	335			P/A	P/A	A/B	A/B	B/C	B/C	C/D
4.7	475			P/A	A/B	A/B	A/B/C	B/C	B/C/D	D
6.8	685			A/B	A/B	A/B/C	B/C	B/C	C/D	D
10	106			P/A/B	A/B/C	A/B/C	B/C	C/D	C/D/E	E
15	156		A/B	A/B	A/B/C	B/C	B/C/D	C/D	C/D	
22	226		P/A	P/A/B/C	A/B/C	B/C/D	B/C/D	C/D	D/E	
33	336		P/A/B	A/B/C	B/C/D	B/C/D	C/D	D/E	D/E	
47	476	A	P/A/B	A/B/C/D	B/C/D	C/D	C/D/E	D/E	E	
68	686	A	B/C	B/C/D	C/D	C/D	D/E	E		
100	107		B/C	B/C/D	C/D/E	D/E	D/E			
150	157	B	B	C/D	C/D/E	D/E/V	E			
220	227	B	B/C/D	C/D/E	D/E	D/E/V				
330	337		C/D/E	C/D/E	D/E	E				
470	477		D/E	D/E	E					
680	687		D/E	E						