


3ATL6+1B00+2B031



Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp:-40/+115°C
high temp:-40/+160°C

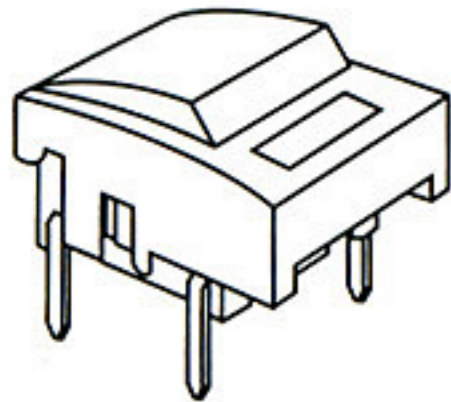