


**SW SERIES**


DIMENSIONS (Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.)

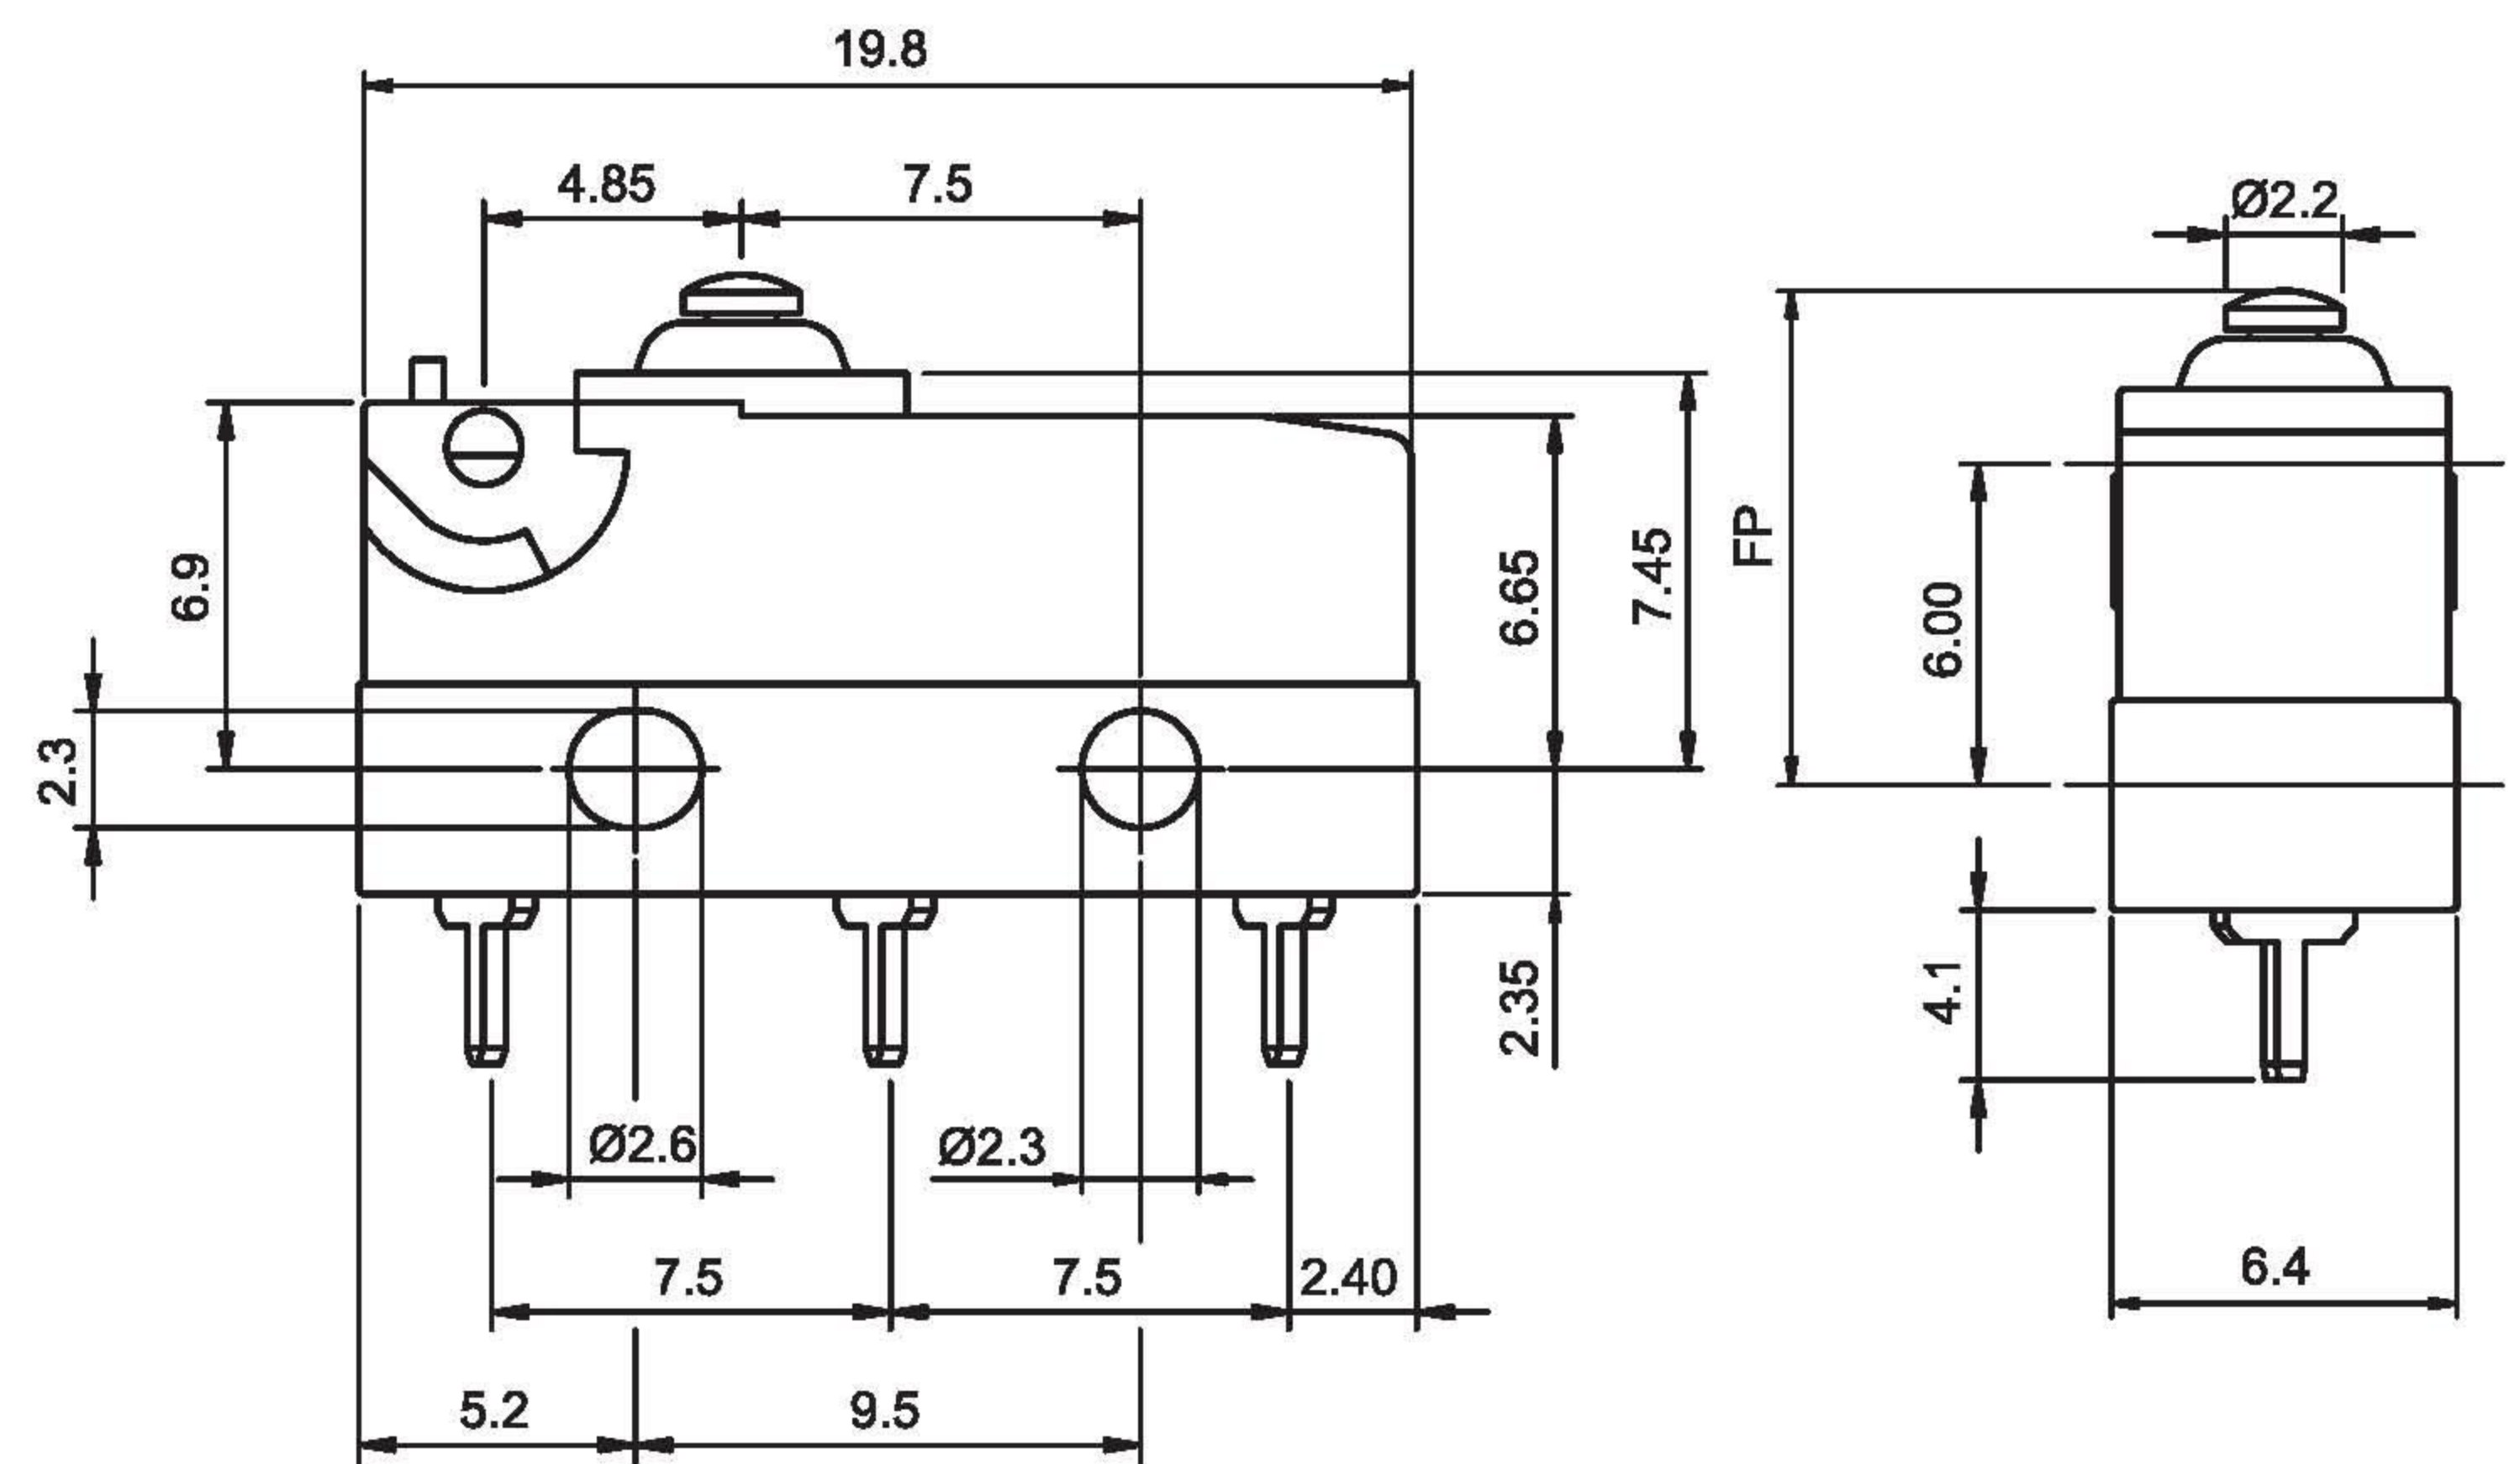

**SPECIFICATIONS**

- Contact Resistance (initial).....Max. 100mΩ
- Insulation Resistance (at 500VDC/minute).....Min. 100MΩ
- Dielectric Strength..... 1000VAC (50~60Hz)
- Storage Temperature Range..... -25°C to 85°C
- Storage Humidity.....at 40°C, Max. 85% R.H
- Vibration.....10~55Hz, displacement 0.75mm (p-p)
- Electrical Service Life.....Min. 10,000 operations
- Electrical Operating Frequency.....10~30 operations per minute
- Mechanical Service Life.....Min. 2,000,000 operations
- Mechanical Operating Frequency.....120 operations per minute

**CONTACT CONFIGURATION**

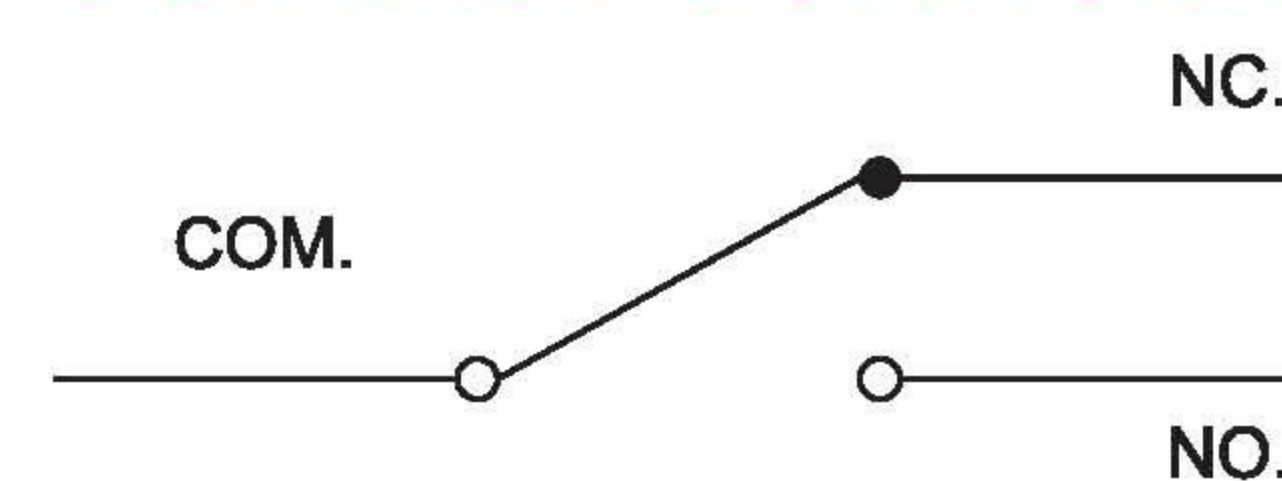

**RATING**

5A 125/250 VAC, 6A125/250 VAC

**APPLICATION**

Telephone, Air conditioner, Computer, Humidifier, Alarm, Time recorder, Mixer & Chopper, Solder gun, Neon Phone, Fax machine, Joystick, Water pump, Gas detector, Pencil sharpener, Money sorter, Food processor, Electric knife, Toy car, Juicer, Electric steak pan.

**ORDERING INFORMATION**

