

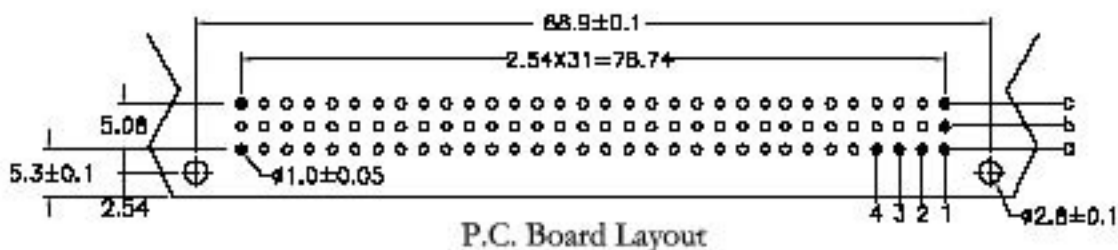


Material:

Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Phosphor Bronze.

Electrical Characteristics

Current Rating: 2 A.
 Dielectric Withstanding Voltage: AC 1000V.
 Insulator Resistance: 1000M Ω min.
 Contact Resistance: 30m Ω max.
 Operating Temperature: -55°C ~ +105°C.

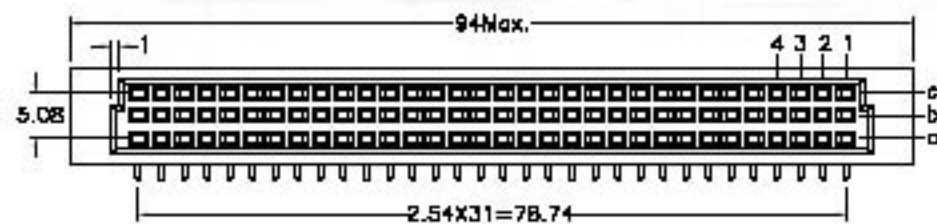

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a - c	
	32	a - -	