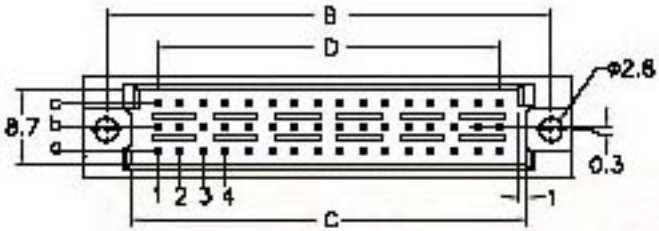

Materials

Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C ~+105°C .

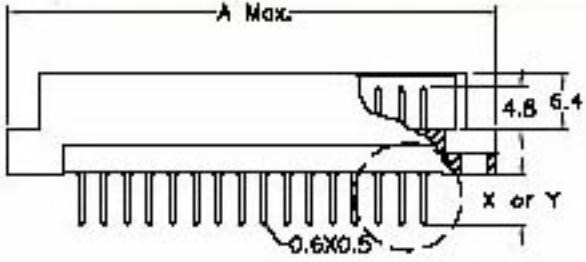



Dip Type



Length	2
X	2.5
Y	6.3

Dimension				
Position	A	B	C	D
48/32/24/16/8	55.0	49.36	44.60	38.10

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	48	a b c	

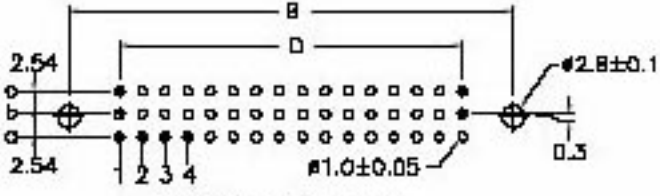

P.C. Board Layout