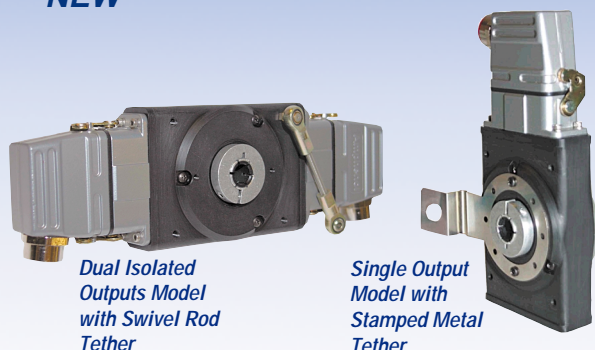


NEW


*Dual Isolated
Outputs Model
with Swivel Rod
Tether*

*Single Output
Model with
Stamped Metal
Tether*

Heavy Duty Sealed Hollowshaft Encoder

DESCRIPTION

The NorthStar brand Series HSD35 Sealed Hollowshaft encoder is designed for easy installation on motor or machine shafts. Its hollowshaft design eliminates the need for a flexible shaft coupling, mounting bracket, flower pot, or flange adapter. This not only reduces the installation depth, but also lowers total cost.

The Series HSD35 Sealed Hollowshaft is equipped with an unbreakable disk that resists contamination and meets the demands of the most severe shock and vibration generating processes. Its floating shaft mount and spring tether eliminate bearing loads and flexible shaft couplings to eliminate wear and maintenance.

Series HSD35 has complete electrical protection from overvoltage, reverse voltage, and output short circuits. In addition, the Series HSD35 is not only electrically & thermally isolated, but also environmentally sealed with shaft seals at both ends.

Series HSD35

- *Hollow Shaft design eliminates mounting bracket, flexible shaft coupling, and installation labor*
- *Bore is electrically and thermally insulated*
- *Single or Dual output - Optional high current line driver*
- *Choice of Stamped Metal or Swivel Rod Tether*
- *High Resolution Unbreakable Disk*
- *Industrial Duty Latching Connector*
- *NEMA 4 / IP66 Rated*
- *Two Year Warranty*

APPLICATIONS:

The HSD35 sealed hollow shaft encoder is ideal for motor and machine applications at resolutions to 2500 PPR. Choice of stamped metal or swivel rod tether provide flexible mounting for a wide variety of installations

- Vector Motor and Drive Feedback
- Converting Machinery
- Packaging Equipment
- Paper Processing

INDUSTRIES

Manufacturing, Assembly, Material Handling and any other where a precise, reliable feedback signal is required.

FEATURES/BENEFITS

Mechanical and Environmental

- Unbreakable code disk
- Flexible mounting
- Minimizes bearing loads
- Heavy duty shaft seals. Optional extra heavy duty rugged shaft seals.
- Sealed connector – No soldering
- Insulated from motor housing/shaft temperatures at or above 125°C
- Direct shaft size minimizes wobble caused by universal inserts

Electrical

- Overvoltage, reverse voltage, & output short circuit protection
- Noise immunity to EN50082-2
- Bore is electrically isolated from shaft currents
- Cast housing maximizes noise immunity and durability

Heavy Duty Sealed Hollowshaft Encoder

Series HSD35

Sealed Hollowshaft for Motor Mount... Lowers Total Installation Cost

SPECIFICATIONS*

STANDARD OPERATING CHARACTERISTICS

Code: Incremental

Resolution: 1 to 2500 PPR (pulses/revolution)
Accuracy: (worst case any edge to any other edge) ± 7.5 arc-min.Format: Two channel quadrature (AB) with optional Index (Z) and complementary outputs
Phase Sense: A leads B for CW shaft rotation viewing the shaft clamp end of the encoderQuadrature Phasing: $90^\circ \pm 22.5^\circ$ electricalSymmetry: $180^\circ \pm 18^\circ$ electrical
Index: $180^\circ \pm 18^\circ$ electrical (gated with B low)

Waveforms: Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pF

ELECTRICAL

Input Power: (each output)

4.5 min. to 26 VDC max. at 100 mA max., not including output loads

Outputs:

7273 Open Collector: 30 VDC max., 40 mA sink max.

7272 Push-Pull and Differential Line Driver: 40 mA sink or source

4469 Differential Line Driver: 100 mA sink or source

Frequency Response: 100 kHz min.

Electrical Protection: Overvoltage, reverse voltage and output short circuit protected

Noise Immunity: Tested to EN50082-2 (Heavy Industrial) for Electro Static Discharge, Radio Frequency Interference, Electrical Fast Transients, Conducted and Magnetic Interference

Mating Connector:

10 pin-style HA-10

ELECTRICAL CONNECTIONS

Signal	Connector Pin
Common	1
B	2
A	3
Z *	4
Case (optional)	5
Vcc 5-26 VDC	6
B	7
A	8
Z *	9
No Connection	10

* Index (Z) optional. See Ordering Information

MECHANICAL

Bearing Life: 80,000 hours at 3600 RPM; 128,000 hours at 1800 RPM

Shaft Loading: 40 lbs. radial, 30 lbs. axial

Shaft Speed: 3600 RPM max. (Important: see Operating Temperature derating for >1800 RPM)

Shaft Bore Tolerance: Nominal $+0.0003"/+0.0005"$ ($+0.008/+0.013$ mm)

Mating Shaft Requirements:

Runout: $\pm 0.025"$ (± 0.63 mm) radial typicalEndplay: $\pm 0.050"$ (± 1.27 mm) axial typical

Minimum Length: 1.25" (32 mm) recommended

Maximum Length: 2.0" (51 mm) to fit inside cover

Solid shaft recommended; keyway allowed; flatted shaft should not be used

Starting Torque: 5.0 oz-in max.

Running Torque: 4.5 oz-in max.

Moment of Inertia:

 $\leq 5/8"$ bore: 7.9×10^{-4} oz-in-sec² $> 5/8"$ bore: 25.6×10^{-4} oz-in-sec²

Weight: 28 oz. max. Environmental

ENVIRONMENTAL

Operating Temperature:

Standard: -40 to $+70^\circ\text{C}$ Extended: 0 to $+100^\circ\text{C}$ $\leq 5/8"$ bore: Derate 5°C per 1000 RPM above 1800 RPM $> 5/8"$ bore: Derate 10°C per 1000 RPM above 1800 RPM.Storage Temperature: -40 to $+90^\circ\text{C}$

Shock: 50 G's for 11 milliseconds duration

Vibration: 5 to 2000 Hz at 20 G's

Humidity: to 98% without condensation

Enclosure Rating: NEMA4/IP66 (dust proof, washdown)

Replaces the Magcode HS35M (shown below)



Contact Customer Service for appropriate replacement model. +1.800.873.8731

* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

NorthStar™ brand is a trademark of Danaher Industrial Controls Group. All rights reserved.
© 2005 DICG Corp.

NorthStar Brand HSD35 Data Sheet (9/05)

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA
Phone: +1 847.662.2666 • Fax: +1 847.662.6633

Satellite Locations:

North America: North Carolina, South Carolina, Connecticut, Massachusetts, New York, Canada, British Virgin Islands • Europe: United Kingdom, Italy, France, Germany, Spain, Slovakia • Latin America: Brazil • Asia: China, Japan, Korea, Singapore

Customer Service:

Tel.: +1.800.873.8731

Fax: +1.847.662.4150

northstar.custserv@dancon.com

Technical Support

Tel.: +1.800.234.8731

Fax: +1.847.782.5277

northstar.techsupport@dancon.com







www.feedbackdevices.com • www.danaherindustrialcontrols.com

Factory Automation Worldwide Brands: Dynapar™ • Eagle Signal™ • Harowe™ • Hengstler™ • NorthStar™ • Veeder-Root™

Sealed Hollowshaft for Motor Mount... Lowers Total Installation Cost

DIMENSIONS

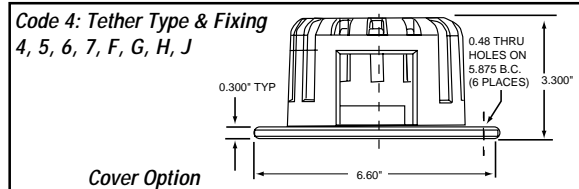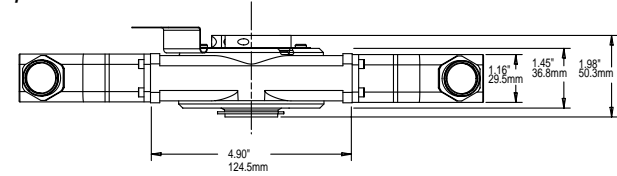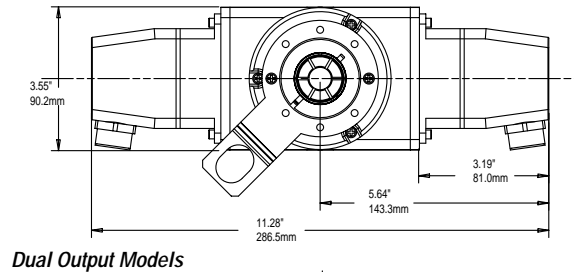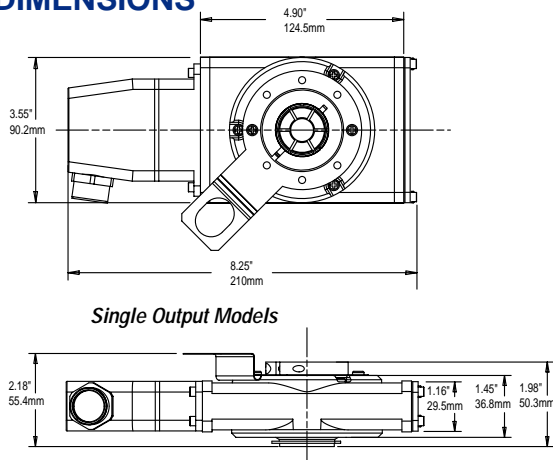

ORDERING INFORMATION

Code 1: Model	Code 2: PPR	Code 3: Bore	Code 4: Tether Type & Fixing	Code 5: Format	Code 6: Output	Code 7: Seal	Code 8: Options		
HSD35									
Ordering Information									
HSD35 Size 35 heavy-duty, sealed hollowshaft encoder with industrial latching connector (1/2" NPT)	0001	0300	0 6 mm	Stamped Metal	Swivel Rod	0 single ended, unidirectional (A)	0 5-26V in, 5-26V open collector out	0 Standard Shaft Seals	Blank None
	0002	0360	1 1/4"	0 None - customer supplied	A Standard Tether	1 single ended, bidirectional (AB)	1 5-26V in, 5-26V open collector out w/ 2.2kΩ pullups	1 Rugged Shaft Seals	D LED Output Indicator
	0003	0400	2 5/16"	1 Clearance hole for 3/8" bolt on 5.88" dia. bolt circle (to fit 4-1/2" NEMA C face)	B 56C Tether	2 single ended, bidirectional with index (ABZ)	2 5-26V in, 5-26V push-pull out		
	0005	0500	3 8 mm	2 Clearance hole for 1/2" bolt on 7.25" dia. bolt circle (to fit 8-1/2" NEMA C-face)	C 180C Tether	available when Code 6 is 3, 4, 5, 6, A or B:	available when Code 5 is 3, 4 or 5:		
	0006	0512	4 3/8"	3 Slotted hole for bolt on 2.5" to 4.0" radius (to fit standard AC motor fan cover slots)	D 56C Tether with protective guard	3 differential, bidirectional (AĀ BĒ)	3 5-26V in, 5V line driver out (7272)		
	0007	0600	5 10 mm	Available when Code 5 is 0-4:	E 180C Tether with protective guard	4 differential, bidirectional with index (AĀ BĒ ZĒ)	4 5-26V in, 5-26V line driver out (7272)		
	0010	0720	6 12 mm	4 Same as '1', w/ cover kit	Available when Code 5 is 5:	5 Dual isolated differential, bi- directional w/index (AĀBĒZĒ)	5 5-26V in, 5 V Differential Line Driver out (4469)		
	0012	0800	7 1/2"	5 Same as '3', w/ cover kit	F Same as 'A', w/ cover kit	available when Code 6 is 3, 4, 5, 6, A or B:	6 5-15V in, 5-15 V Differential Line Driver out (4469)		
	0025	0900	8 5/8"	Available when Code 5 is 5	G Same as 'B', w/ cover kit		A same as '3' with high temp. to 100°C		
	0050	1000	9 15 mm	6 Same as '1' w/ dual cover kit	H Same as 'A' w/ dual cover kit		B same as '4' with high temp. to 100°C		
	0060	1024	A 16 mm	7 Same as '3' w/ dual cover kit	J Same as 'B' w/ dual cover kit				
	0064	1200	B 19 mm						
	0100	1270	C 3/4"						
	0120	1500	D 20 mm						
	0128	1800	E 7/8"						
	0180	2000	F 24 mm						
0200	2048	G 1"							
0240	2400	H 1-1/8"							
0250	2500	J 14 mm							
		K 18 mm							
		M 25 mm							
		N 28 mm							
		P 1-1/4"							
109473-0001	Stamped Tether kit (clearance hole for 3/8" bolt on 5.88" dia. bolt circle)					110533-0001 Cover Kit, 56C face			
109473-0002	Stamped Tether kit (clearance hole for 1/2" bolt on 7.25" dia. bolt circle)					110533-0002 Cover Kit, fan cover			
109473-0003	Stamped Tether kit (slotted hole for bolt on 2.5" to 4.0" radius)					110533-0003 Dual Cover Kit, 56C face			
112121-0001	Spare Hub Clamp (Bore size Code 3: 0 - 9)					110533-0004 Dual Cover Kit, fan cover			
112121-0002	Spare Hub Clamp (Bore size Code 3: A - H)					106-764 Spare Mating Connector			
756-042-01	Rod tether kit , standard								
756-043-01	Rod tether kit , 56C								
756-044-01	Rod tether kit , 180C								

Worldwide Brands:

Dynapar™

Eagle Signal™

Harowe™

Hengstler™

NorthStar™

Veeder-Root™



**A division of
Danaher, a
Fortune 500
company with
offices in 30
countries around
the world.**

More Available. With factories around the world, global sales and applications support, and an expansive network of distributors, we stay close to our customers - shortening lead times and fostering responsiveness. Three-day lead time is standard, with same-day shipments available on many of our products.

More Selection. We have a broad selection of controllers to meet application requirements in a variety of industries. User-configurable, accurate and flexible, with low, mid, or high level performance ranges, our controller products meet your system and budgetary requirements.

More Reliable. Our experience with more than 25,000 customers has taught us to design controllers that are reliable and durable, with quality standards that meet six sigma requirements.

For additional information or a full-line catalog, contact DICG Customer Service or visit our web site.

* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

NorthStar™ brand is a trademark of Danaher Industrial Controls Group. All rights reserved.

© 2005 DICG Corp.

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA
Phone: +1 847.662.2666 • Fax: +1 847.662.6633

NorthStar brand HSD35 Data Sheet (11/05)

Satellite Locations:
North America: North Carolina, South Carolina, Connecticut, Massachusetts, New York, Canada, British Virgin Islands • Europe: United Kingdom, Italy, France, Germany, Spain, Slovakia • Latin America: Brazil • Asia: China, Japan, Korea, Singapore

Customer Service:

Tel.: +1.800.873.8731

Fax: +1.847.662.4150

northstar.custserv@dancon.com

Technical Support

Tel.: +1.800.234.8731

Fax: +1.847.782.5277

northstar.techsupport@dancon.com



www.feedbackdevices.com • www.danaherindustrialcontrols.com

Factory Automation Worldwide Brands: Dynapar™ • Eagle Signal™ • Harowe™ • Hengstler™ • NorthStar™ • Veeder-Root™