



## LED 信号灯

LED Signal Lamp



Ø6(KL06)


Ø8(KL08)

Ø10(KL10)

Ø12(KL12)

Ø14(KL14)

Ø16(KL16)

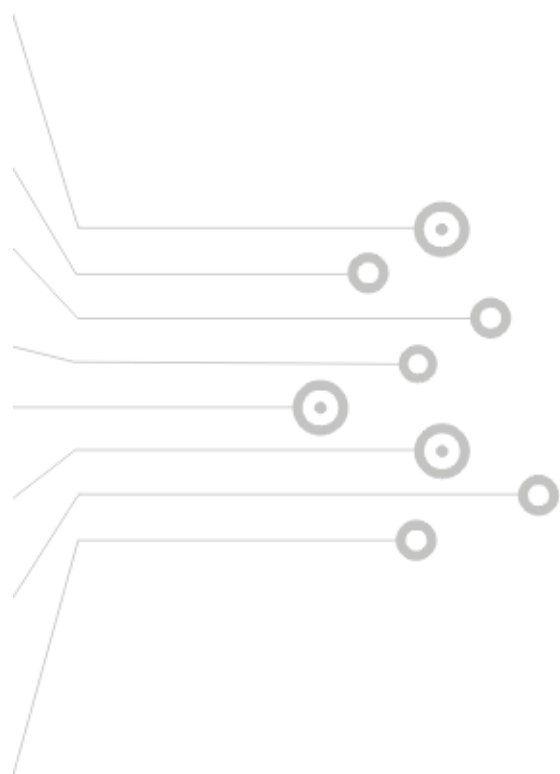

## KL 系列 KL Series

※□颜色: R,G,Y



KL0612□ (12V)  
KL0624□ (24V)  
KL0611□ (110VAC)  
KL0622□ (220VAC)



KL0812□ (12V)  
KL0824□ (24V)  
KL0811□ (110VAC)  
KL0822□ (220VAC)



KL1012□ (12V)  
KL1024□ (24V)  
KL1011□ (110VAC)  
KL1022□ (220VAC)



KL1212□ (12V)  
KL1224□ (24V)  
KL1211□ (110VAC)  
KL1222□ (220VAC)



KL1412□ (12V)  
KL1424□ (24V)  
KL1411□ (110VAC)  
KL1422□ (220VAC)




KL1612□ (12V)  
KL1624□ (24V)  
KL1611□ (110VAC)  
KL1622□ (220VAC)


注) 48V以下AC/DC共用。

## 外形尺寸及接线图 (KL 系列) Dimensions & Wiring Diagram(KL Series)


KL06




KL08




KL10

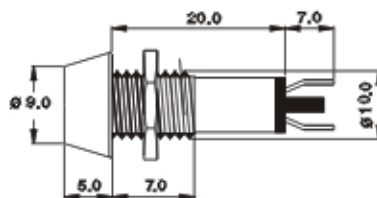


KL12

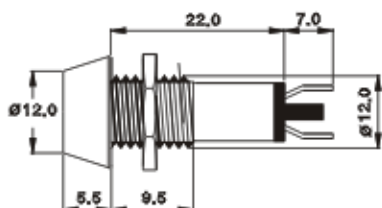

KL14

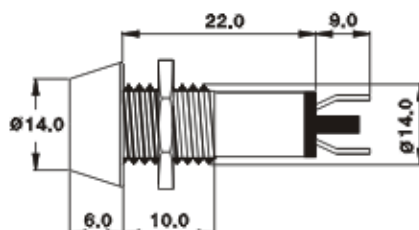

KL16

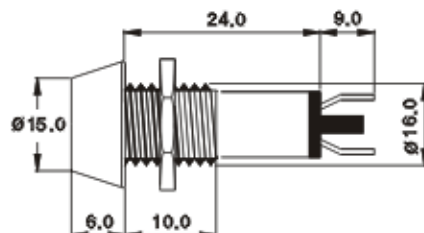

## 一般性能 (KL 系列) General Specification(KL Series)

消耗电流 Norminal Current	20mA以下(DC24标准), AC用10mA以下
介质耐压 Dielectric Strength	500VAC 1分钟
绝缘电阻 Insulation Resistance	100MΩ以上 500VDC
材 质 Material	黄铜
环境温度 Ambient Temperature	-25℃~60℃(无凝露、无结冰)

※如因提高质量而进行产品更改, 恕不另行通知。All right reserved. Specification subject to change without notice.