

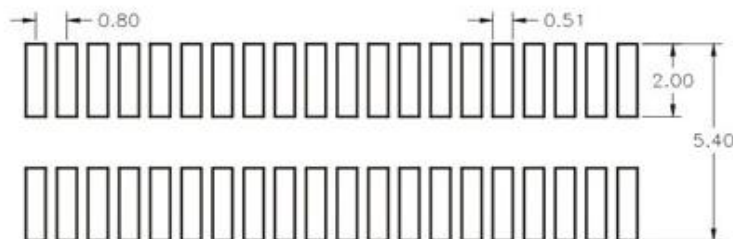
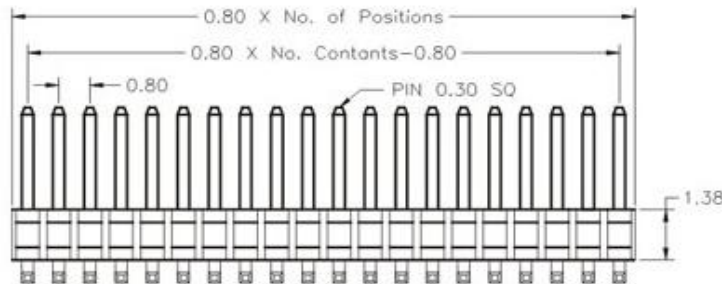


WOXCONN ELECTRONICS (SHEN ZHEN) CO., LTD

0.8*1.2mm Pin Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
Operation Temperature: -40° C to +105° C
Contact Resistance : 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : AC 500V
Insulator Material : High Temperature Thermoplastic (UL94V-0)
Contact Material : Phosphor Bronze
Contact plating : Au over 50 u" Ni

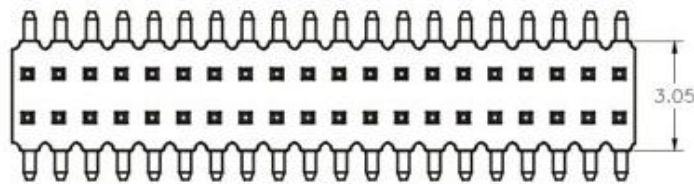

PCB LAYOUT

Ordering Information

1 6 14 — 1	2 XX	G0	M	XXX	01
No. of Pins Per Row 01~50	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	Pin Length $XXX=B+D+1.38+(W-1.2)/2$			

Http://www.woxconn.com

E-mail:@woxconn.com

Tel:86-0755-29591214

Tel:86-0755-27951049

Add:Yicheng Induarial District Xixiang Town,BaoAn District,ShenZhen,Guangdong,China.