


Pin Header

Board Space Single Row Dual Row
Straight Type

Series 2.00mm
322 / 325

[Http://www.woxconn.com](http://www.woxconn.com)





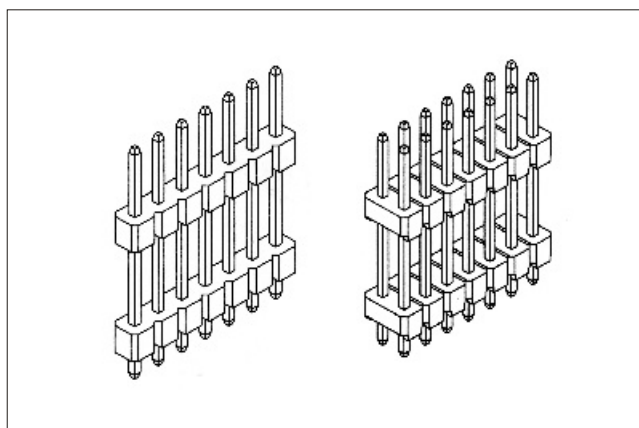


SPECIFICATIONS:

Current Rating: 2.0 AMP
Contact Resistance: 30m Ω Max
Insulation Resistance: 1000M Ω Min
Withstand Voltage: 500VAC/minute
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ Ni
Insulator Material: Polyester(UL94V-0)
Standard: PBT

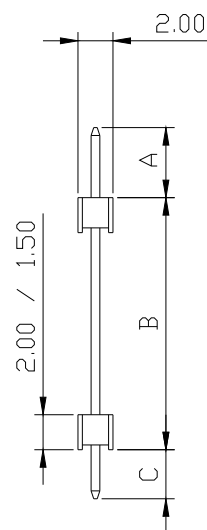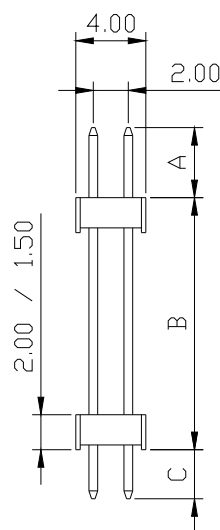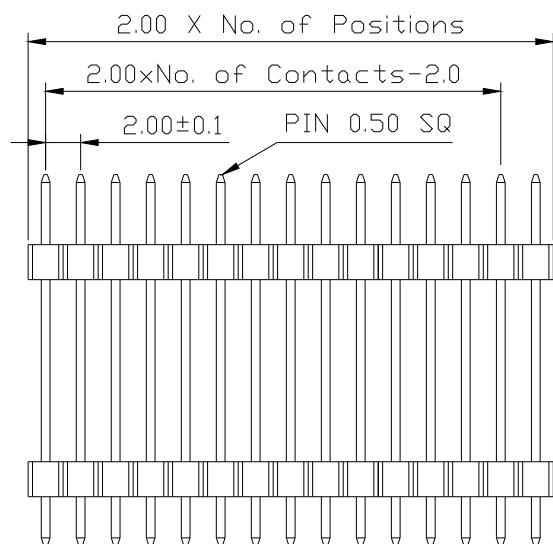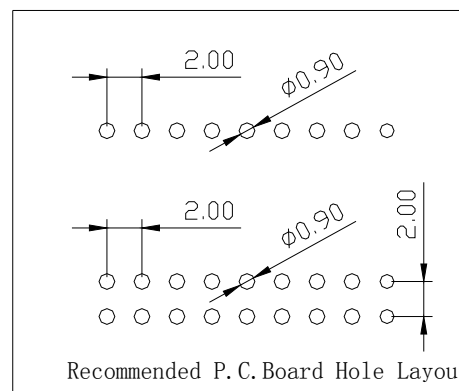

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
3 2 X X XX S X X 2 XXX

① Series No.:
3= Pin Header

③ Insulator Height
2 = 2.00mm
5 = 1.50mm

② Pitch:= 2.00mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row=01 to 40
Double row=02 to 80

⑥ Tail Mounting Style:
S=Straight DIP type

⑦ Contact Plated
0=Tin
2=Gold 3u"
4=Gold 10u"
6= Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PC

⑨ Tiers of Body
1=Gold Fl = Single tier
2 = Double tier
3 = triple tier

⑩ Pin Length
XXX=A+B+C

Due to technical progress, all information provided is subject to change without prior notice.