




No. of Contacts	DIMENSIONS	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

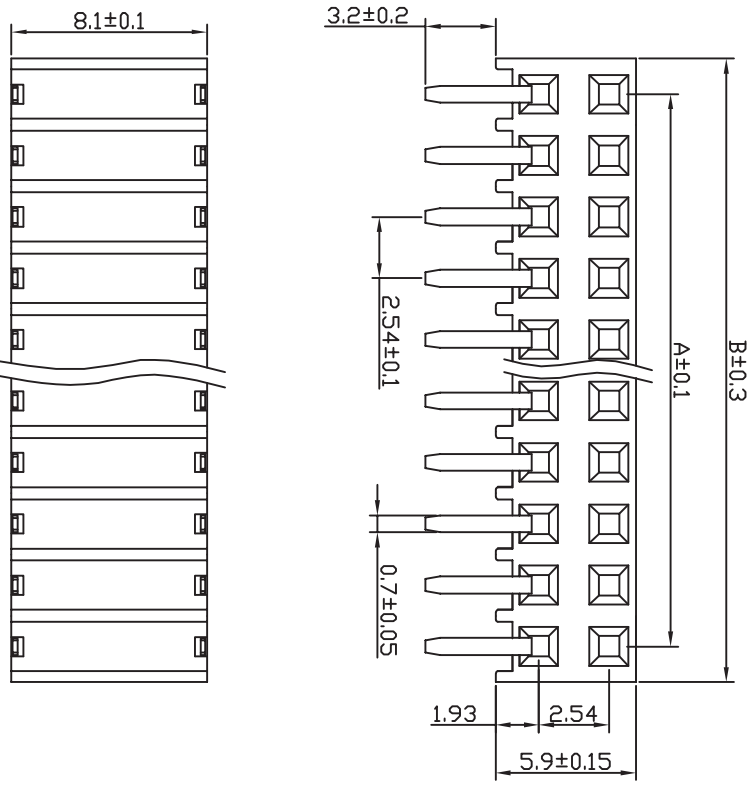

SPECIFICATIONS

Current Rating: 3 Amps
 Insulation Resistance: 1000M Min
 Contact Resistance: 20M Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40! to +105!
 Contact Material: Brass
 Insulator Material: Polyester (UL 94V-0)
 Standard: PBT

Recommended P.C.B Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE			
x.	±0.3	x.°	±5°
x.x	±0.2	x.x°	±1°
x.xx	±0.1	x.xx°	±0.5°
SCALE	UNIT		
DRAWN	mm		

深圳威鑫联电子有限公司
 woxconn electronics co.,ltd
 TEL: 0755-29591214
 FAX: 0755-27951049

DRAWN NAME: LI BET LIN 17/01/08
 DRAWN NAME: 2.54mm Female Header

2.54PF 2XNPin H8.1 DIP 1 2 3

CHECKED	APPROVED	SIZE	REV	PILE NAME:
		A4	A	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---