


Female Header
Single Row / Dual Row
DIP Right Angle

Pitch: 2.54 x Series
218 219

woxconn

[Http://www.woxconn.com](http://www.woxconn.com)










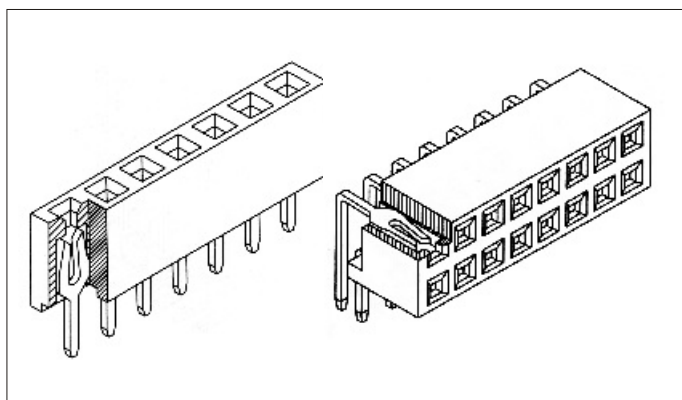


SPECIFICATIONS:

Current Rating: 3.0 AMP
Contact Resistance: 30m Ω Max
Insulation Resistance: 1000M Ω Min
Withstand Voltage: 600VAC/minute
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ Ni
Insulator: Glass Filled Polyester(UL94V-0)
Standard: PBT

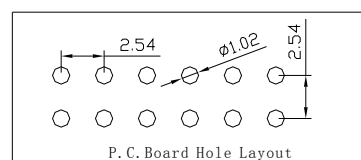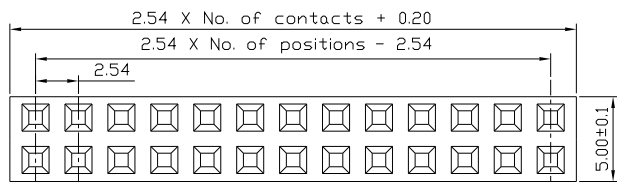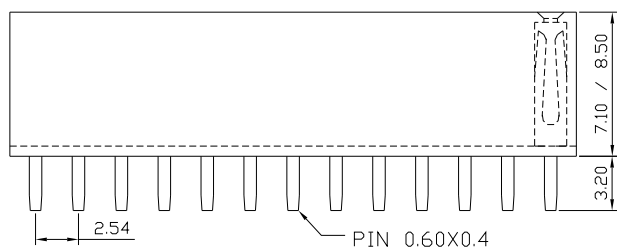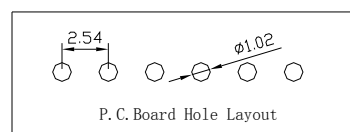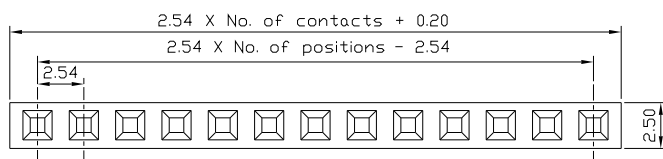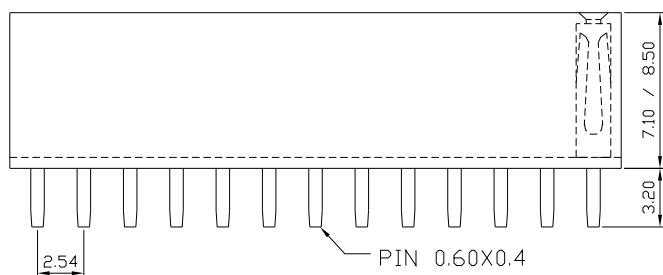

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 1 8 X X X X X 1 0

① Series No.:
2= Female Header

③ Insulator Height:
8 = 8.5mm
9 = 7.1mm

② Pitch= 2.54mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row 01 to 40
Double row 02 to 80

⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle Dip type
M=Straight SMT type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6=Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color: 1=Black

⑩ Customer Request

Due to technical progress, all information provided is subject to change without prior notice.