

料号: K BTB2 090 08 M 25 36 A

科颖料号

BTB1:单槽板对板
BTB2:双槽板对板

A: 单边定位柱
B: 对角定位柱
C: 中心定位柱

25: 高度2.5mm
52: 合高5.2mm
57: 合高5.7mm

F: 母座
M: 公座

05: pin距0.5mm
08: pin距0.8mm
XX: pin距X.Xmm




180: 180度对插
090: 90度侧插

ROHS
全程环保作业


版次	设变描述	备注
A		

SPECIFICATION

- 1, Voltage Rating: 50v Max.
- 2, Current Rating: 0.5A AC/DC Max.
- 3, Contact Resistance: 40 milliohms maximum.
- 4, Insulation Resistance: 100 megaohms minimum.
- 5, Withstanding Voltage: 500V AC RMS.
- 6, Temperature Range: -25° C to +85° C.
- 7, MATERIALS:
housing::LCP471i UL94V-0, WHITE.
Contact: Phosphor bronze C5210.
Plating: Gold Flash with 1 U" Min
Nickel with 80 U" Under Plater

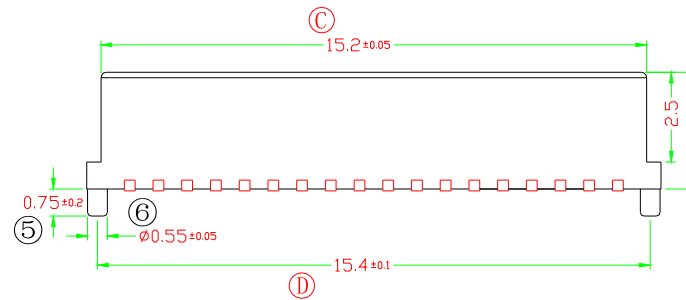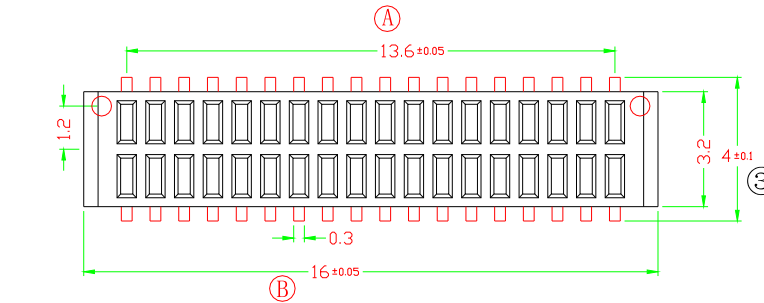

P. C. B LAYOUT

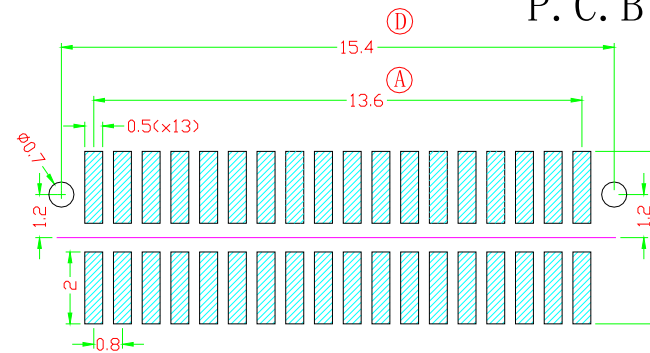

项目规格	尺寸	①	②	③	④
2×4		2.4	4.8	4.0	4.2
2×5		3.2	5.6	4.8	5.0
2×6		4.0	6.4	5.6	5.8
2×7		4.8	7.2	6.4	6.6
2×8		5.6	8.0	7.2	7.4
2×10		7.2	9.6	8.8	9.0
2×12		8.8	11.2	10.4	10.6
2×13		9.6	12.0	11.2	11.4
2×15		11.2	13.6	12.8	13.0
2×18		13.6	16.0	15.2	15.4
2×25		19.2	21.6	20.8	21.0
计算式	(pin-1)X0.8	A+2.4	A+1.6	A+1.8	

公司料号:	KBTB209008F2536A		客户料号:		设计:	邓方平	日期:	2008.04.10	WOXCONN ELECTRONIC CO.,LTD.		
品名:	90° BTB母端(2X18单边柱)	客户:	公差:	.X 0.10 .XX 0.05 .XXX 0.025	比例:	单位: mm	审图:	日期:			
规格:	2X18pin PH:0.8 H2.5 90 母座(单边柱)		投影法:	⊕	批准:	日期:	页码:	版次:			